



INDUSTRY KITCHENS

www.industrykitchens.com.au 1800 611 058



RCTHW2-6 w/ standard RCTHW-PC and non-standard RCTHW-BASKET accessories



RCTHW2-3B

HEATMAX Rectangular Heated Wells

RCTHW2-3 / -3B, RCTHW2-6 / -6B

Countertops & Built-Ins

◆ Features:

- Heat is evenly distributed throughout the unit to cook or hold foods at desired temperatures, and the insulated stainless steel design provides easy maintenance and durable performance.
- All units are equipped with an improved electronic control panel and an energy saving low power mode that saves electricity during off-peak hours.
- RCTHW2 Series units are equipped with two high-powered heating elements for efficient, even heating.
- Autofill and Pasta plate come standard on 6kw models.
- Three settings, low/medium/high, each with it's own temperature setting range of 40-65°C, 65-80°C and 80-95°C.




3kw models control




6kw models w/ auto-fill control

HEATMAX Rectangular Heated Wells Models: RCTHW2 Series

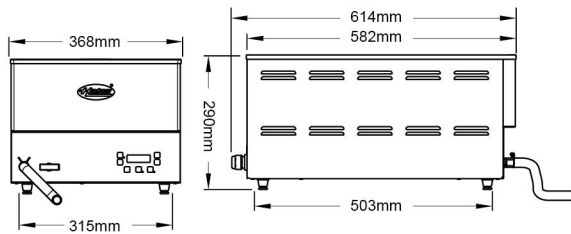

RCTHW2-x

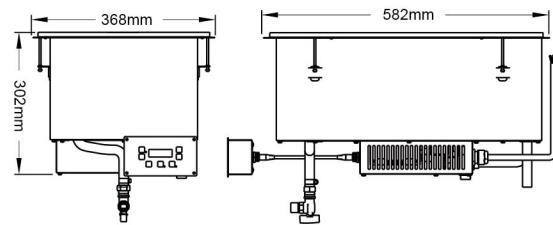

RCTHW2-xB

SPECIFICATIONS HEATMAX Rectangular Heated Wells

Models	Voltage (V)	Power (W)	Amps (A)	Product Dimensions (W x D x H)	Ship Weight (kg)
RCTHW2-3	220-240	2520-3000	11.5-12.5	368*582*290	12
RCTHW2-3B				368*582*302	13
RCTHW2-6	220-240	5040-6000	23-25	368*582*290	14
RCTHW2-6B				368*582*302	15

*Ship weight includes packaging.
RCTHW2-6/6B models are available for 230/400V, three phase.

Countertop models:

3kw shipped w/ 1830mm cord & plug.
6kw shipped w/ 1830mm cord, auto-fill, overflow drain and a pasta cooker plate.

Built-in models:

3kw shipped w/ 1830mm cord & plug, remote control box and a 2000 mm well to control box cable.
6kw shipped w/ 1830mm cord, auto-fill, overflow drain, remote control box, a pasta cooker plate and a 2000 mm well to control box cable.

