

PRODUCT ADVANTAGES



- High volume XL wash chamber undercounter dishwasher suitable for washing up to 600x400mm Euronorm / baking sheets / trays. Ideal for bakeries, fast-food restaurants, cafés and snack bars
- Above average usable chamber height of 420mm for easy loading and washing of extra large items
- Simple to use single button control: provides colour coded machine status
- 3 selectable wash cycles - 60, 120 & 180 seconds + the Hygiene programme (in combination with Hygiene-Tab INTENSIV) for removal of calcium carbonate and other deposits from wash chamber
- A cost saving 2.0l of rinsing water per cycle
- Rinse pressure pump to overcome fluctuating or low supply water pressures and to provide guaranteed consistent wash results. Suitable for use with HOBART RO-S reverse osmosis water treatment
- Deep drawn low volume wash tank (10.8litres) with integral strainer
- Double walled and insulated cabinet and door for low noise and heat emission during operation
- Dampened door mechanism for ease of use
- 0.5kW wash pump to help clean the heaviest soil from items
- Optional refill signal: monitors contents of external as well as integrated chemical containers
- Optional double rack insert to effectively increase the capacity and reduce operating costs - see image below.
- Supplied with 1 x plate rack, 1 x flat rack, 1 x 4 section cutlery basket, fill and drain hoses, chemical pumps, 15amp single phase plug and lead for ease of installation
- Designed and manufactured in GERMANY by HOBART
- WATERMARK approved

TECHNICAL DATA

Cycle times*	1. 60sec 2. 120sec 3. 180sec Hygiene Cycle
Water consumption	2.0 l/rack
Tank capacity	10.6 l
Tank heating	0.8 kW
Power supply	240 / 50 / 1 - 15amp
Booster loading Standard	2.0 kW
Total loading Standard	2.6 kW 15 A
Wash pump	0.5 kW 380 l/min
Rack size	500 x 500 mm
Loading height	425 mm
Noise level	60.5 dB (A)
Weight (gross / net)	57 / 69 kg

INDUSTRY KITCHENS


www.industrykitchens.com.au 1800 611 058



*Thermostat guarantees required temperatures with cold water and / or 240 V connection, the actual cycle times extend accordingly.

For machine protection the water hardness should not exceed 3°dH, if higher we recommend using an integrated water softener or an external water softener of the product line HYDROLINE PROTECT.

DIMENSIONAL DRAWING

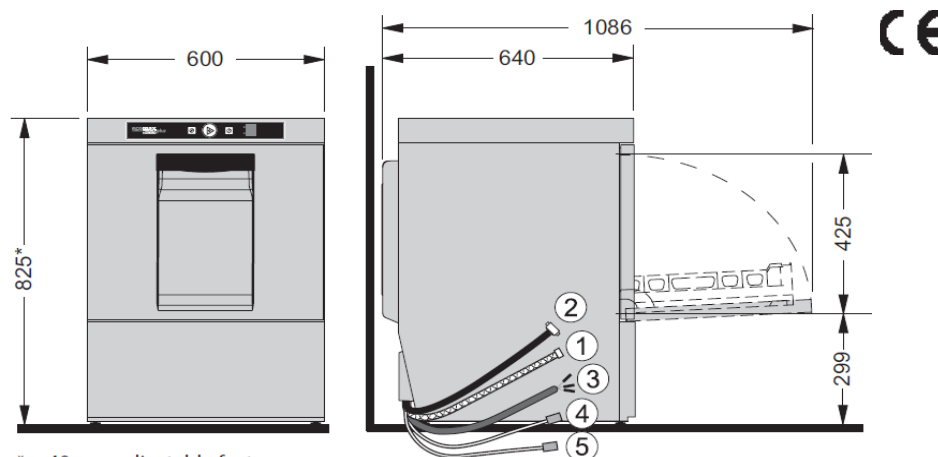

* + 40 mm adjustable feet

CONNECTIONS

① Drain hose	2,000 mm ID20/OD25
Reverse Osmosis unit (RO-S)	Independent gravity waste to tundish
② Supply hose	2,000 mm R 3/4"
Required flow rate	5 l/min
Flow pressure	0.5 (0.8 with softener)- 6 bar
Max. supply water temperature	60 °C F515L 35 °C with RO-S
③ Power cord	2,000 mm
Supply hose for	
④ Detergent	2,500 mm
⑤ Rinse aid	2,500 mm