



### PRODUCT ADVANTAGES

- High volume undercounter glass & dishwasher with an overall height of only 825mm
- Above average usable chamber height of 420mm for easy loading and washing of extra large items
- Simple to use single button control: provides colour coded machine status
- 3 selectable wash cycles - 60, 120 & 180 seconds + a special cutlery cycle, glass wash cycle, bottle wash (in conjunction with \*\* HOBART's bottle wash kit) & the Hygiene programme (in combination with Hygiene-Tab INTENSIV) for removal of calcium carbonate and other deposits from wash chamber
- A cost saving 2.0l of rinsing water per cycle
- Rinse pressure pump to overcome fluctuating or low supply water pressures and to provide guaranteed consistent wash results. Suitable for use with HOBART RO-S reverse osmosis water treatment
- Deep drawn low volume wash tank (10.8litres) with integral strainer
- Double walled and insulated cabinet and door for low noise and heat emission during operation
- Dampened door mechanism for ease of use
- 0.5kW wash pump to help clean the heaviest soil from items
- Optional refill signal: monitors contents of external as well as integrated chemical containers
- Optional double rack insert to effectively increase the capacity and reduce operating costs. See image below.
- Supplied with 1 x plate rack, 1 x flat rack, 1 x 4 section cutlery basket, fill and drain hoses, chemical pumps, 15amp single phase plug and lead for ease of installation
- Designed and manufactured in GERMANY by HOBART
- WATERMARK approved

### TECHNICAL DATA

|                          |                                                                                                                   |
|--------------------------|-------------------------------------------------------------------------------------------------------------------|
| Cycle times*             | 1. 60sec<br>2. 120sec<br>3. 180sec<br>Special cutlery & glass wash cycles<br>Bottle wash cycle**<br>Hygiene Cycle |
| Water consumption        | 2.0 l/rack                                                                                                        |
| Tank capacity            | 10.6 l                                                                                                            |
| Tank heating             | 0.8 kW                                                                                                            |
| Power supply             | 240 / 50 / 1 - 15amp                                                                                              |
| Booster loading Standard | 2.0 kW                                                                                                            |
| Total loading Standard   | 2.6 kW   15 A                                                                                                     |
| Wash pump                | 0.5 kW   380 l/min                                                                                                |
| Rack size                | 500 x 500 mm                                                                                                      |
| Loading height           | 425 mm                                                                                                            |
| Noise level              | 60.5 dB (A)                                                                                                       |
| Weight (gross / net)     | 57 / 69 kg                                                                                                        |

# INDUSTRY KITCHENS


[www.industrykitchens.com.au](http://www.industrykitchens.com.au) 1800 611 058



\* Thermostat guarantees required temperatures with cold water and / or 240 V connection, the actual cycle times extend accordingly.

For machine protection the water hardness should not exceed 3°dH, if higher we recommend using an integrated water softener or an external water softener of the product line HYDROLINE PROTECT.

### DIMENSIONAL DRAWING

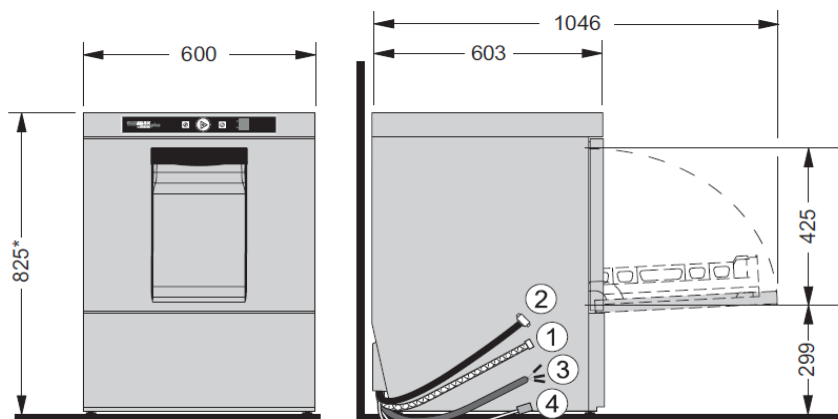

\* + 40 mm adjustable feet

### CONNECTIONS

|                               |                                      |
|-------------------------------|--------------------------------------|
| ① Drain hose                  | 2,000 mm   ID20/OD25                 |
| Reverse Osmosis unit (ROI)    | Independent gravity waste to tundish |
| ② Supply hose                 | 2,000 mm   R 3/4"                    |
| Required flow rate            | 5 l/min                              |
| Flow pressure                 | 0.5 (0.8 with softener)- 6 bar       |
| Max. supply water temperature | 60 °C F515<br>35 °C with RO-S        |
| ③ Power cord                  | 2,000 mm                             |
| Supply hose for               |                                      |
| ④ Detergent                   | 2,500 mm                             |
| ⑤ Rinse aid                   | 2,500 mm                             |

