

### PRODUCT ADVANTAGES



- **Compact glasswasher:** installation height of only 820 mm with integrated reverse osmosis
- **VISIOTRONIC-TOUCH control:** colour touchscreen (displays text and graphic) in conjunction with single-button control and remaining cycle time indication
- **SmartConnect app:** controlling your warewash operation with smart technology: status and messages, usage and operating costs, hygiene and service
- **CLIP-IN wash and rinse system:** easy removal without any tools
- **Intelligent data documentation:** automatic recording of important operational data and consumptions and indication on the display
- **USB-interface:** comfortable download of operational data in form of a protocol via USB
- **GENIUS-X<sup>2</sup> fine filter system:** advanced filter system with pre-wash function reduces detergent consumption up to 35 %
- **Intensive programme:** intensive rinse cycle to wash glasses with critical design with raised fresh-water amount
- **Interlocked strainer:** prevents operation without tank strainer
- **Optional refill signal:** monitors contents of external as well as integrated chemical containers
- **Hygiene programme (in combination with Hygiene-Tab INTENSIV)** for removal of calcium carbonate and other deposits from wash chamber
- **Thermolabel 71 °C:** default temperatures setting acc. European DIN can be switched by operator to a higher thermolabel setting
- **WATERMARK APPROVED**

### TECHNICAL DATA

Cycle times*	1. 75sec 2. 120sec
Water consumption	1.7 l/rack
Tank capacity	8 litres
Tank heating	0.8 kW
Power supply	240 / 50 / 1 (415 / 50 / 3N)
Booster loading	
Standard	2.8 kW
Alternative	4.1 kW
Total loading	
Standard	3.2 kW   15A
Alternative	4.6 kW   15A (3ph)
Wash pump	0.6 kW   220 l/min
Rack size	400 x 400 mm
Loading height	315 mm
Noise level	57 dB (A)
Weight (gross / net)	64 / 58 kg


# INDUSTRY KITCHENS

www.industrykitchens.com.au 1800 611 058

\*Thermostop guarantees required temperatures with cold water and / or 240 V connection, the actual cycle times extend accordingly.

For machine protection the water hardness should not exceed 3°dH, if higher we recommend using an integrated water softener or an external water softener of the product line HYDROLINE PROTECT.

### DIMENSIONAL DRAWING

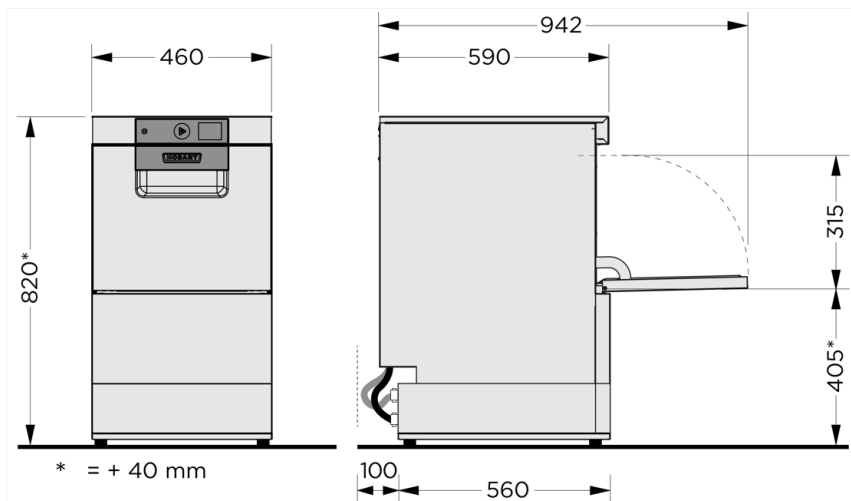

### CONNECTIONS

① Drain hose	2,000 mm   ID20/OD25
② Supply hose	2,000 mm   R 3/4"
Reverse Osmosis unit (ROI)	Independent gravity waste to tundish
Required flow rate	5 l/min
Flow pressure	0.5 (0.8 with softener)-6 bar
Max. supply water temperature	35 °C
③ Power cord	2,000 mm
Supply hose for	
④ Detergent	2,500 mm
⑤ Rinse aid	2,500 mm