

# H2TMS

MULTIDECK OPEN FRONT CHILLER CABINET



ENHANCED ENERGY EFFICIENCY  
& VERSATILITY

**PRODUCT BENEFITS**

- Ergonomic design for easy product access
- Adjustable shelving options to optimise merchandising
- Optimised display with LED lighting
- Product temperature compliance
- Easy plug-in on-site installation

**STANDARD FEATURES**

- Durable internal and external powder coat finish
- Single row of 4000K LED canopy lighting
- Undershelf 4000K LED lighting
- 5 rows of 450mm powder coated unlit shelves plus 525mm base
- Ticket strips
- Air return grill
- Long life galvanized internal base
- Solid mirror ends
- Night blind - manual slow release
- Stainless steel bumper
- Adjustable feet
- Evaporative condensate removal
- EC fan motors
- Digital controller with temperature display

**CUSTOMISATIONS**

**SHELVING & BASE SHELF**

- Optional additional shelves and brackets

**LIGHTING**

- LED under-shelf lighting

**ENDS**

- Glass view ends



**OTHER**

**TECHNOLOGY SOLUTIONS**

- Electronic shelf labels or video rail
- 35mm Castors (Not Lockable)

**ENERGY & SUSTAINABILITY**

- Air-Guide technology
- Door solutions

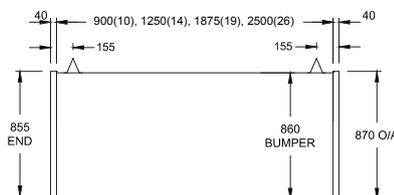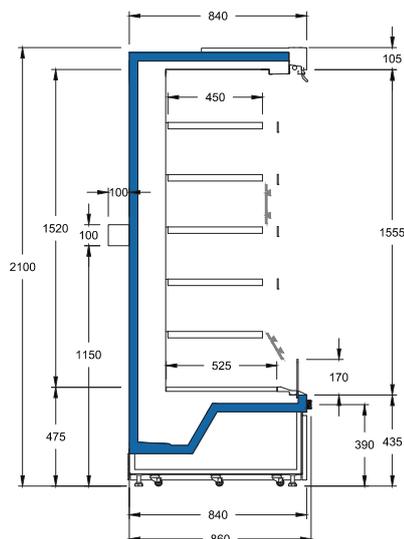

| TECHNICAL DATA                 |          |          |          |          |
|--------------------------------|----------|----------|----------|----------|
| Model (H2TMS)                  | H2TMS-10 | H2TMS-14 | H2TMS-19 | H2TMS-26 |
| Depth (mm)                     | 860      |          |          |          |
| Height (mm)                    | 2100     |          |          |          |
| Length w/o ends (mm)           | 900      | 1250     | 1875     | 2500     |
| Length with ends (mm)          | 980      | 1330     | 1955     | 2580     |
| Net Volume (L)                 | 529      | 735      | 1102     | 1469     |
| Gross Volume (L)               | 643      | 893      | 1339     | 1785     |
| Display Area (m <sup>2</sup> ) | 1.409    | 1.958    | 2.936    | 3.915    |
| Amperes (amps)                 | 10       | 15       | 15       | 20       |

**AVAILABLE COLOURS**



**TEMPERATURE CLASS**

**3M1**

(+1 °C to +5 °C)

**Additional Information**

All Dimensions shown in Millimetres (mm) unless otherwise stated. Dimensions and features are subject to change. Please obtain current technical information prior to order confirmation.

**NOTE:** We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or Shipped.



**Australia Head Office**  
 66 Glendenning Road Glendenning, NSW 2761 Australia  
 ph. +612 8805 0400  
 w. hussmann.com.au

