FORM-TEK DIVISION

BATTER-BREADING MACHINES

BB 150

laminerva



MADE IN ITALY


minerva omega GROUP


Experience. Evolution. Excellence.



BB 150

MAIN FEATURES	
Short description	Counter-top batter-breading machine
Available voltages	V 230/1/50 Hz
Available power consumption	0,18 kW (0,25 HP)
Productivity pcs/h	2000 - 3000 pcs/h
Standard features	• Made of stainless steel
Conveyor belt	150 cm max. input conveyor belt width
Speeds	fixed 10 m/min
Product inlet dimensions	42 mm maximum height of the product to be breaded
Net weight	55 kg
Additional features	• Variable conveyor belt width • Fast coupling with automatic forming machines •On request: wheeled stainless steel table for in-line connection with forming machines, additional conveyor belt for in-line production of meatballs with forming machines, pressure roller





Dimensions displayed in mm

	BB 150
Width	470
Depth	1090
Height	400

AVAILABLE ACCESSORIES

• Stainless steel table with wheels (LxWxH: 665x605x435 mm) for in-line connection with SMART - C/E 653(R) - MAX - FLEX - C/E HF forming machines
• Stainless steel table with wheels (LxWxH: 665x605x785 mm) for the placement of SMART - C/E 653 - FLEX - MAX for in-line connection with all automatic batter-breading machines
• Additional 780 mm conveyor belt required exclusively for in-line production of meatballs with the C/E HF automatic forming machine
• Accessory to facilitate the conveying of round/spherical products
• Machine set-up for products with a fragile texture. To be ordered with ROUND/KIT accessory

Minerva Omega group s.r.l.
Via del Vetraio, 36 - 40138 Bologna - Italy
tel. +39 051 530.174 - fax +39 051 535.327
info@minervaomegagroup.com
www.minervaomegagroup.com

NR. 9656-A




BB 150


CONFIGURATIONS - Forming and batter-breading machines pairings

ABBINAMENTO IMPANATRICI CON HAMBURGATRICI | FORMING AND BATTER-BREADING MACHINES PAIRINGS (*)


BB 150 + SMART



BB 150T + SMART




BB 240T + SMART

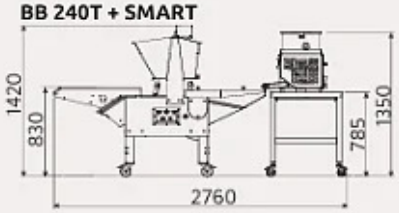


BB 150 + C/E 653 (R)




BB 150T + C/E 653 (R)




BB 240T + C/E 653 (R)

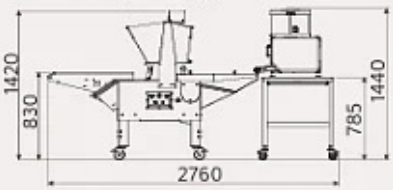


BB 150 + MAX




BB 150T + MAX




BB 240T + MAX

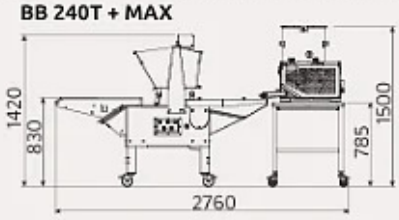


BB 150 + HF




BB 150T + C/E HF




BB 240T + C/E HF

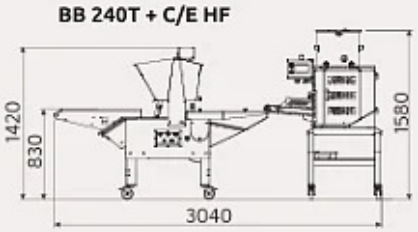


BB 150 + FLEX



BB 150T + FLEX



BB 240T + FLEX

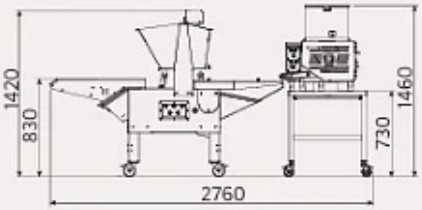

(*) Tutte le quote sono espresse in millimetri (mm) - *All the values are expressed in millimeters (mm)*

Minerva Omega group s.r.l.
Via del Vetraio, 36 - 40138 Bologna - Italy
tel. +39 051 530.174 - fax +39 051 535.327
info@minervaomegagroup.com
www.minervaomegagroup.com

NR. 9656-A