


### Product Advantages:

- Housing made completely of stainless steel.
- Appliance height only 270mm; more space in substructure.
- U-shaped connection channel, flush with top plate; tightly fitted to the substructure, for maximum hygiene.
- Directed drainage of fluids via a drip outlet in the top plate at the front.
- Smoothly polished frying surface made of PowerBlock special sandwich material.
- Appliance with two separate heating zones.
- Steel frying surface 440 x 560 mm.

### Product Advantages:

- Electrical supply provided by customer.

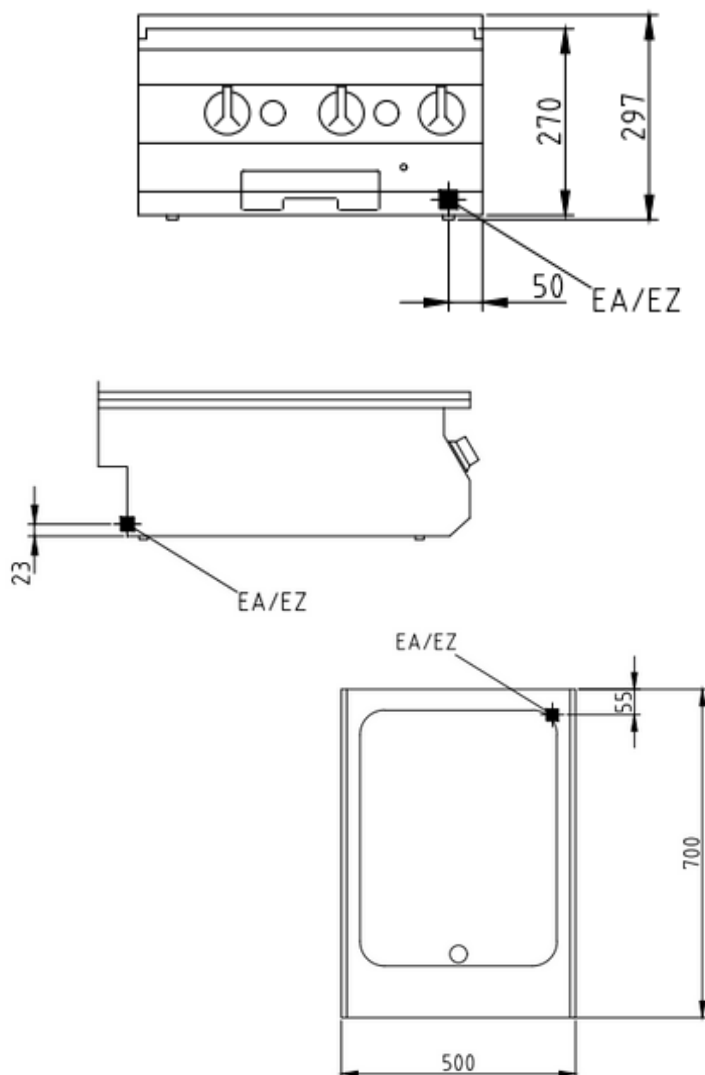

### Technical Data:

|                               |                 |
|-------------------------------|-----------------|
| Reference:                    | 1221135A        |
| Width x Height x Depth (mm)   | 500 x 270 x 700 |
| Dim. effect. Area (mm)        | 440 x 560       |
| Connected load (elect.) (kW): | 7.2             |
| Voltage (V) / EC:             | 415 3 phase AC  |
| Recommended fuses (A):        | 3 x 20          |
| Net weight (kg):              | 52              |
| Gross weight (kg):            | 60              |
| Heat emission latent (W):     | 2880            |
| Heat emission sensitive (W):  | 2376            |
| Type of protection:           | IPX4            |