




Product Advantages:

- Housing made completely of stainless steel.
- U-shaped connection channel, flush with top plate; tightly fitted to the substructure, for maximum hygiene.
- Buckling resistant, self-supporting, closed construction.
- Hob zones with radiating heating elements 210 mm diameter, 2,3 kW each.
- Pan size recognition can be switched to manual control.
- Protection against overheating by automatic power resetting.
- Seamless glass ceramic hob 6 mm thick and area 700 x 540 mm.

Installation requirements:

- Electrical power provided by customer.

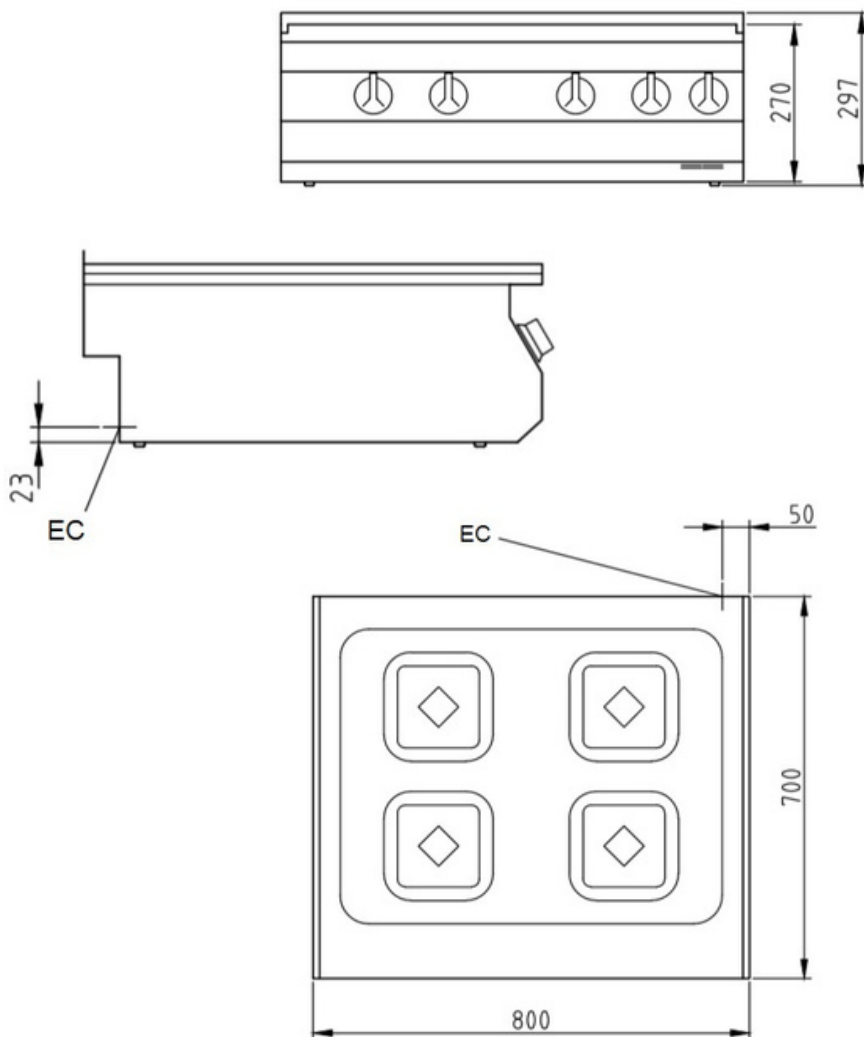

Technical Data:

Width x Height x Depth (mm)	800 x 270 x 700 mm
Effective area	1
Dim.: effect. Area (mm)	700 x 540
Connected load (elect.) (kW):	9.2
Voltage (V) / EC:	415 3 phase AC
Frequency (Hz):	50
Recommended fuses (A):	3 x 32
Net weight (kg):	38
Gross weight (kg):	47
Heat emission latent (W):	736
Heat emission sensitive (W):	1840
Type of protection:	IPX4

