


For boiling, steaming, frying, braising, simmering. For cooking meat, quick-fried meat, egg products, fish, milk products and side dishes.

Product Advantages:

- Housing made completely of chrome nickel steel (1.4301) / (304).
- Tightly welded top plate with lateral drain channels for easy cleaning.
- Pan made of heat resistant steel as standard.
- SUPRA heating system-contact heating elements integrated into aluminium blocks ensure greater heating capacity and even distribution of heat, with short heating up times and longer service life.
- Appliance with two separately adjustable heating zones.
- Ideal pan positioning prevents spills and guarantees that the pan is fully emptied. Equipped for connection to a power optimization system with potential free contact as standard.
- Double walled hinged lid.

Installation requirements:

- Electrical supply provided by customer.

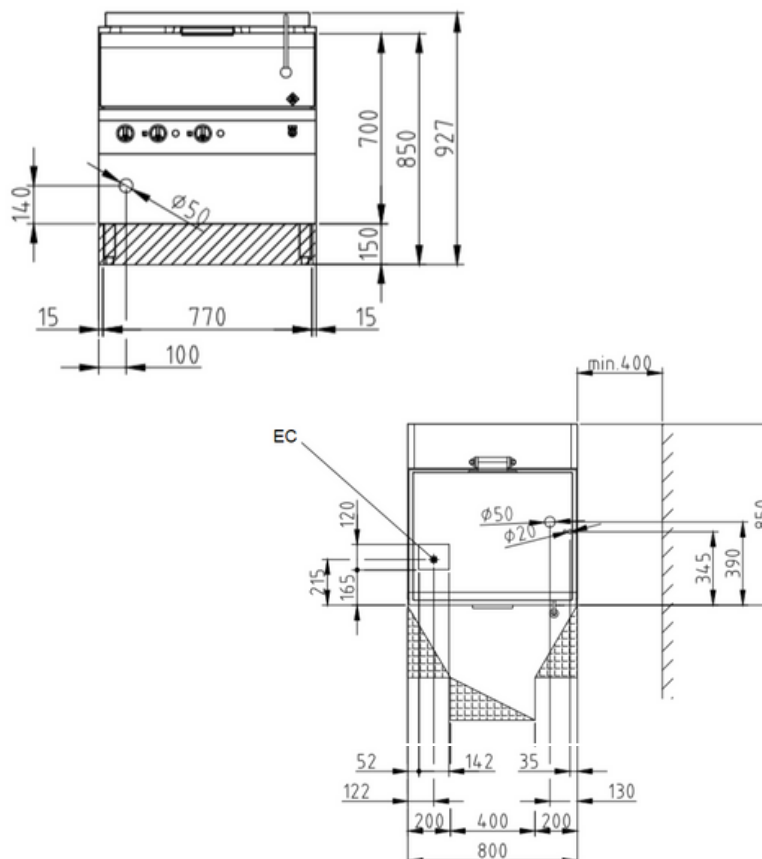

Technical Data:

Width x Height x Depth (mm)	800 x 700 x 850
Effective area	1
Dim.: effect. Area (mm)	720 x 190 x 535
Nominal capacity (L):	77
Nominal fill quantity (L):	62
Connected load (elect.) (kW):	11
Voltage (V) / EC:	415 3 phase AC
Recommended fuses (A):	3 x 20
Frequency range (Hz):	50
Net weight (kg):	158
Gross weight (kg):	167
Heat emission latent (W):	4400
Heat emission sensitive (W):	4950
Type of protection:	IPX5

