
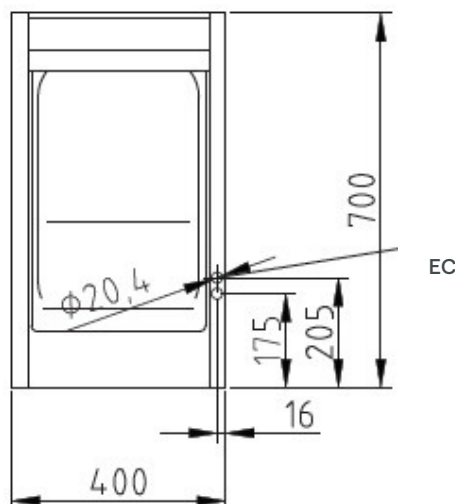


#### Product Advantages:

- Housing made completely of stainless steel.
- Visible surfaces with polished and satin finish, 320 grit.
- Buckling resistant, self-supporting, closed construction with side walls, rear wall and bottom.
- Tightly welded top plate with lateral drain channels for easy cleaning.
- Heating by ceramic radiant heating elements, activated via the appliance switch.

#### Installation requirements:

- Electrical supply provided by customer.

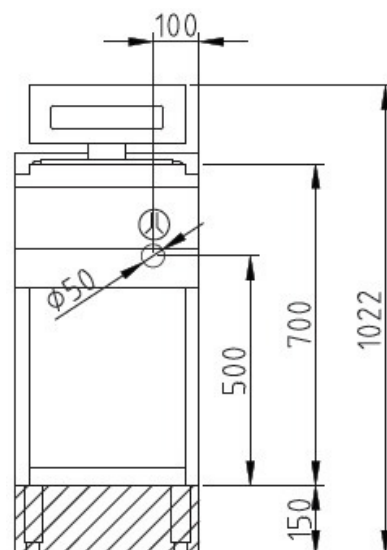

#### Technical Data:

|                              |                       |
|------------------------------|-----------------------|
| Width x Height x Depth (mm)  | 400 x 700 (900) x 700 |
| Effective area               | 1                     |
| Dim.: effect. Area (mm)      | 305 x 200 x 510       |
| Connected load (elec.) (kW): | 1                     |
| Voltage (V) / EC:            | 240 1 phase AC        |
| Recommended fuses (A):       | 1 x 16                |
| Net weight (kg):             | 36                    |
| Gross weight (kg):           | 41                    |
| Heat emission latent (W):    | 175                   |
| Heat emission sensitive (W): | 700                   |
| Type of protection:          | IPX5                  |