



For boiling, steaming, frying, braising, simmering as well as pressureless cooking and pressure cooking for shorter cooking times. For cooking meat, quick-fried meat, egg products, fish, milk products and side dishes.

Product Advantages:

- Housing made completely of stainless steel.
- SUPRA heating system-contact heating elements integrated into aluminium blocks ensure greater heating capacity and even distribution of heat, with short heating up times and longer service life.
- Appliance with two separately adjustable heating zones.
- Ideal pan positioning prevents spills and guarantees that the pan is fully emptied.
- Equipped for connection to a power optimization system.
- Motorised tilting system

Installation requirements:

- Electrical supply provided by customer.

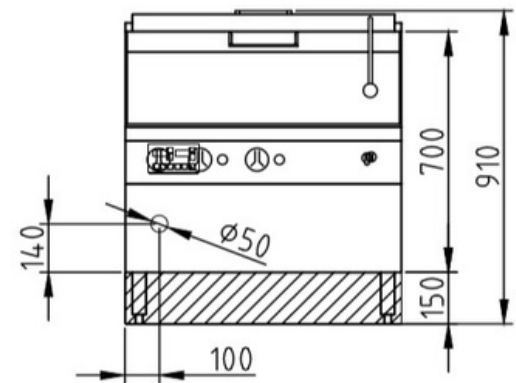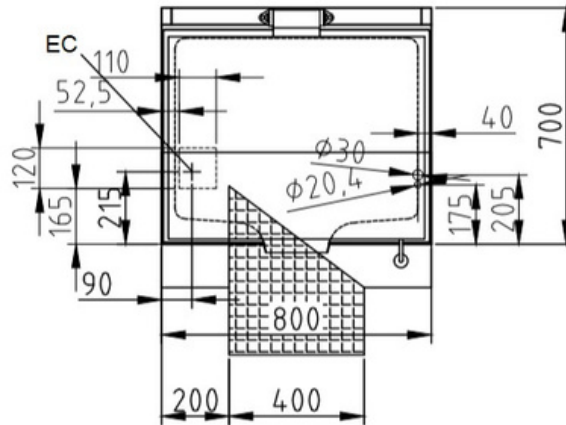

Technical Data:

Width x Height x Depth (mm)	800 x 700 x 700
Effective area	1
Dim.: effect. Area (mm)	720 x 190 x 535
Nominal capacity (L):	59
Nominal fill quantity (L):	44
Connected load (elect.) (kW):	11
Voltage (V) / EC:	415 3 phase AC
Recommended fuses (A):	3 x 20
Frequency range (Hz):	50
Standard gas pressure (mbar)	20
Natural gas	
Standard gas pressure (mbar)	30 (DE), 50 (EU)
Liquid gas	
Net weight (kg):	144
Gross weight (kg):	153
Heat emission latent (W):	4400
Heat emission sensitive (W):	4950
Type of protection:	IPX5

