



PHOENIKS

FLEXICOMBI MAGICPILOT 6.1 GAS
MODEL NO: FKG061R_MP

MKN combi steamer FlexiCombi 6 tray GN 1/1 or FlexiRack® (530 x 570 mm) with MagicPilot operation system.


Product Advantages:

- MagicPilot – Robust, wear-free, capacitive true colour touch screen.
- FlexiRack® – 50% more cooking capacity (= save time and energy).
- Video assist – Interactive user assistance with clips featuring professional chefs.
- CombiDoctor – Self-diagnosis programme.
- GreenInside – Indicates the energy and water consumption for each cooking programme.
- AutoChef – Up to 350 individual cooking programmes and manual operating system.
- Durable hygienic cooking chamber and chamber door with insulated triple glazing.
- DynaSteam2 – It speeds up the cooking process and saves energy.
- Integrated heat exchanger.
- WaveClean – Automatic cleaning system (safe, easy, economical).
- USB interface.
- 3 years warranty parts and labour.

Installation requirements:

- Soft Water / Water supply / Connection to waste water provided by customer.
- If mineral content is high, reverse osmosis system may be advisable.

Capacity: Meals per day	30 – 80 (GN 1/1)
	30 – 150 (FlexiRack)

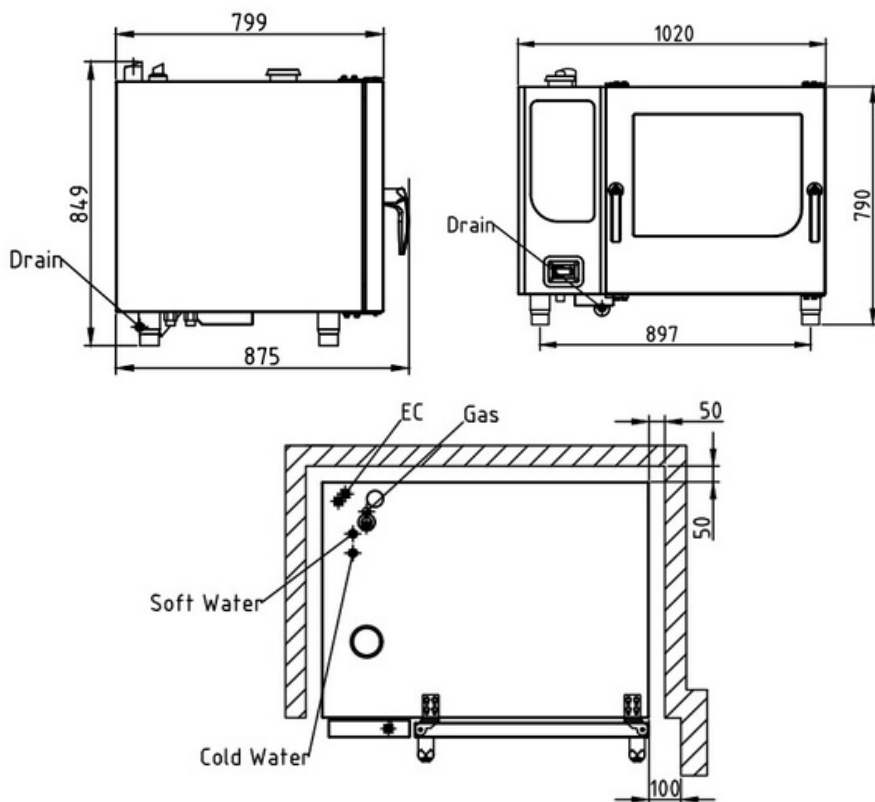

Technical Data:

Width x Height x Depth (mm)	1020 x 790 x 799
Connected load (gas) (MJ/h)	39.6
Connected load (electrical) (kW):	0.6
Voltage (V) / EC:	240 1 phase AC
Recommended fuses (A):	1 x 10
Frequency range (Hz):	50
Soft Water connection:	DN 20 (R ¾" inside)
Water connection:	DN 20 (R ¾" inside)
Waterpressure (kPa):	200 - 600 (2 - 6 bar)
Drain connection:	DN 50
FlexiRack® (530 x 570 mm)	6 (max. 65 mm deep)
Gastronorm 1/1 (530 x 325 mm):	6 (max. 65 mm deep)
Material housing:	1.4301
Material cooking chamber:	1.4404
Gross weight (kg):	160
Heat emission latent (W):	1980
Heat emission sensitive (W):	1650
Type of protection:	IPX 5



**INDUSTRY
KITCHENS**

www.industrykitchens.com.au 1800 611 058



phoeniks.com.au
P- 1300 405 404
E- contact@phoeniks.com.au