

# SINGLE PAN ELECTRIC PASTA COOKER 450mm

E47, E47-7

- High performance single pan pasta cooker  
E47 10.5kW 3 phase  
E47-7 7.0kW 1 phase
- Heavy-duty 3 coil Incoloy 825 element
- Easy clean 316 grade stainless steel open pan
- 40L water capacity
- Integrated water fill and starch skimming water faucet
- Six stainless steel pasta baskets supplied
- Hinged basket drain stand
- Safety cut-out thermostat for empty pan/water boil out
- Stainless steel exterior
- Easy clean
- Easy service
- Fully modular



E47

### Overall Construction

- Pan 1.5mm 316 stainless steel
- Bull nose welded 1.5mm stainless steel
- Splashback 1.2mm stainless steel
- Side panels 1.2mm stainless steel
- Double skin door with 0.9mm stainless exterior
- 25mm (1") skimming overflow and pan drains drain valve
- 63mm dia. heavy-duty 1.2mm stainless steel legs with adjustable feet
- 6 stainless steel baskets with moulded handles
- Stainless steel wire basket support grid in pan

### Controls

- Large easy to use knob - heat resistant reinforced
- 3 power settings (boil-simmer-standby)
- Mechanical thermostat
- Thermostat range 30°C - 110°C
- Fail safe over-temperature safety cut-out
- Element tilt switch for heating cut-out
- Indicator lights for power & heating
- Fine adjustment water faucet for pan filling and water refreshing/ starch skimming

### Cleaning and Servicing

- Open stainless steel pan for easy clean
- Hinged basket drain stand
- Removable basket support grid
- 25mm (1") drain valve for effective draining
- Easy clean stainless steel exterior
- Access to all parts from front of unit

# SINGLE PAN ELECTRIC PASTA COOKER 450mm

E47, E47-7

### Specifications

#### Pan Size

Water capacity 40L  
Width 365mm  
Length 405mm  
Basket immersion depth 165mm

#### Baskets

6 stainless steel perforated baskets with moulded plastic handles 125mm x 165mm x 180mm deep  
Stainless steel wire basket support grid

#### Elements

1 x 10.5kW Incoloy 825 heating element (E47)  
1 x 7.0kW Incoloy 825 heating element (E47-7)

#### Electrical Requirements

##### E47

10.5kW, 400-415V, 50/60Hz, 3P+N+E  
L1 14.6A  
L2 14.6A  
L3 14.6A

##### E47-7

7.0kW, 220-240V, 50/60Hz, 1P+N+E  
L1 29.2A

#### Electrical Connection

56mm from RH side, 541mm from rear and 489mm from floor

#### Water Connection

Cold water connection 50mm from left hand side, 556mm from rear and 150mm from floor  
R<sup>1</sup>/<sub>2</sub> (BSP) male  
550kPa 80psi maximum water pressure

#### Drain Connection

Drain must be connected to system suitable for boiling water discharge  
1" BSP Male connection 118mm from left hand side, 470mm from rear, and 170mm from floor

#### Dimensions

Width 450mm  
Depth 812mm  
Height 915mm  
Incl. splashback 1085mm

#### Nett weight


78kg

#### Packing data

0.54m<sup>3</sup>, 120kg  
Width 870mm  
Depth 495mm  
Height 1255mm

#### Options

Rectangular baskets 320mm x 165mm x 180mm deep  
Square baskets 165mm square x 180mm deep  
Side splash guards  
Joining caps

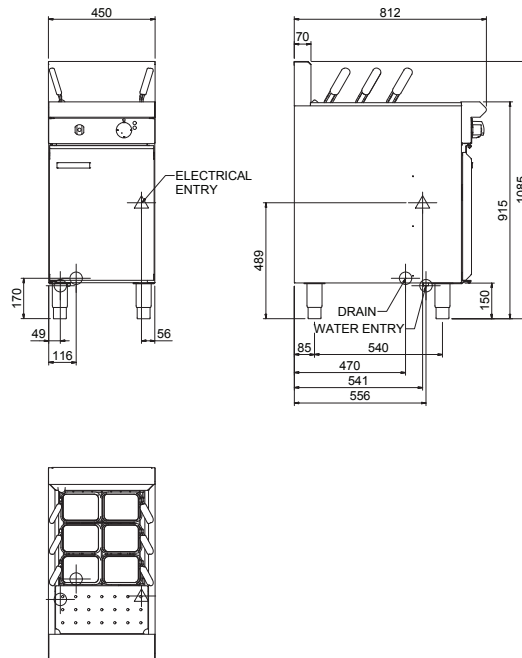

moffat.com.au  
moffat.co.nz

Australia  
moffat.com.au

#### Moffat Pty Limited

Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone +613-9518 3888  
Facsimile +613-9518 3833  
vsales@moffat.com.au

New South Wales  
Telephone +612-8833 4111  
nswsales@moffat.com.au  
South Australia  
Telephone +613-9518 3888  
vsales@moffat.com.au

Queensland  
Telephone +617-3630 8600  
qldsals@moffat.com.au

Western Australia  
Telephone +618-9413 2400  
wasales@moffat.com.au

#### New Zealand

moffat.co.nz

#### Moffat Limited

Rolleston  
45 Illinois Drive  
Izone Business Hub  
Rolleston 7675  
Telephone +64 3-983 6600  
Facsimile +64 3-983 6660  
sales@moffat.co.nz

Auckland  
Telephone +64 9-574 3150  
sales@moffat.co.nz



ISO9001  
Quality  
Management  
Standard

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd  
AN.BSE.02.19/1620

an Ali Group Company



The Spirit of Excellence