

NU Series Self Contained Dice Ice Machines – up to 68kg

NU 150 AS OX Dice cube 10g, 22mm x 22mm x 22mm

NUH 150 AS OX Half dice cube 6g, 10mm x 22mm x 28mm

NUL 150 AS OX Large dice cube 15g, 29mm x 22mm x 29mm



Dice cube 10 g
W 22 x D 22 x H 22 mm



Half dice cube 6 g
W 10 x D 22 x H 28 mm



Large dice cube 15 g
W 29 x D 22 x H 29 mm



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.


- Up to 68kg daily production rate
- 20kg storage bin capacity
- Air cooled version
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- Vertical evaporator spray-system technology
- XSafe - Natural Sanitation System
- Ergonomic access to ice with sliding disappearing door
- One touch cleaning for time and labour saving
- Resistant stainless steel exterior
- Easy access front condenser air filter
- Routine maintenance visible alarm light on front panel
- Includes removable air filter, ice scoop, water and drain hose



XSafe

NU Series Self Contained Dice Ice Machines – up to 68kg

NU 150 AS OX, NUH 150 AS OX, NUL 150 AS OX

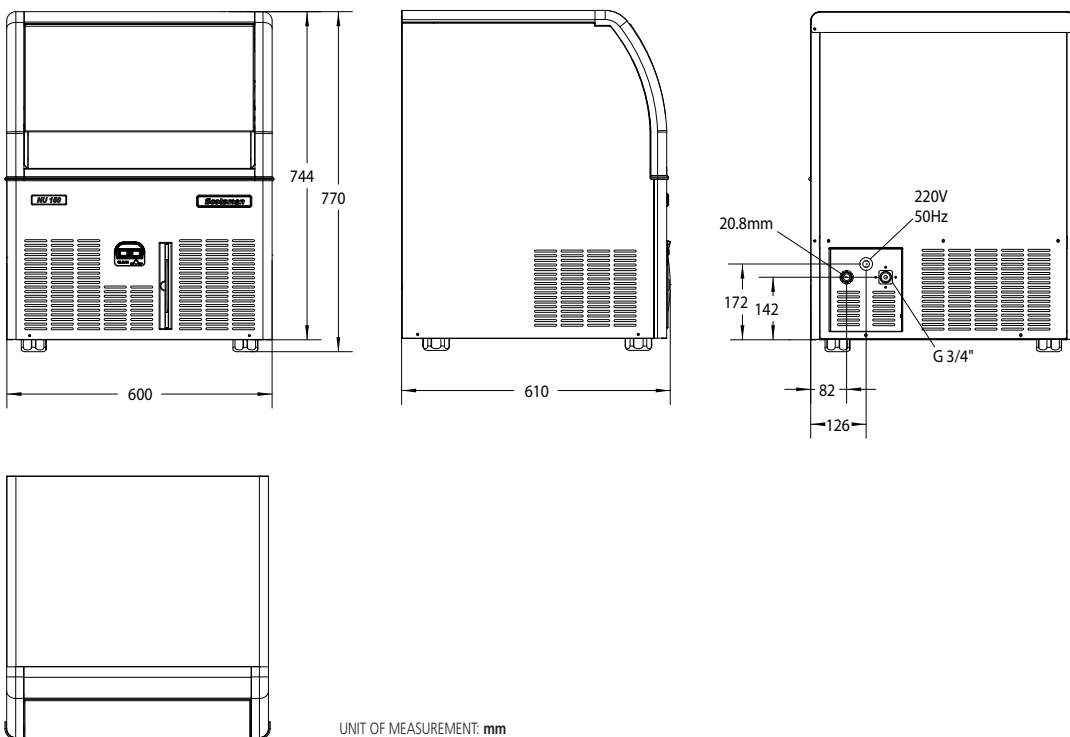

UNIT OF MEASUREMENT: mm



moffat.com.au

Australia
Moffat Pty Limited
Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9413 2400
wasales@moffat.com.au

Ice production per 24 hours

Ambient temperature / Water temperature

| | 10°C / 10°C | 21°C / 10°C | 32°C / 21°C |
|---------------|----------------|----------------|----------------|
| NU 150 AS OX | 85 | 68 | 48 |
| NUH 150 AS OX | 85 | 70 | 50 |
| NUL 150 AS OX | 80 | 70 | 50 |

Dimensions

Width: 600mm
Depth: 610mm
Height: 770mm (including feet)
Nett weight: 50kg
Packed weight: 62kg

Water consumption

Air cooled version:
NU 150 AS: 3.3 litres per hour
NUH 150 AS, NUL 150 AS: 3.4 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 500W,
10A cordset supplied
No. Circuit wire: 3
Compressor: 990W
Energy consumption: 10.8kW/hr

Refrigerant type

R404a

Installation distance from wall

Rear 100mm
Sides 150mm
Operating requirement air temperature 10-43°C

Water connection requirements

Inlet connection: R 3/4"
Cold water: 5-38°C
Pressure: 100-500kPa
Water outlet connection: Ø 3/4"

Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd
AU.SM.2001