

## Classe 7 USB Tall - RC2G C7EVO BLK IS

### RANCILIO CLASSE 7 USB TALL 2 GROUP iSTEAM



#### STANDARD FEATURES

- Factory fitted automated steam wand for one touch milk steaming operation
- Independently programmable buttons can be set for both milk temperature and emulsion
- Tall deck accommodates tall cups up to 145mm in height includes retractable tray for espresso cups
- RGB lights identifying operating status
- SB - Steady Brew patented heat exchanger technology for outstanding temperature control
- T-Switch, 4 positioned temperature extraction setting for each grouphead upon installation
- Single hot water button with start/stop dosing for full control
- ABM advanced boiler management for outstanding steam pressure control and recovery
- Ergonomic portafilter holder up to 21g capacity, comfortable for all-day operation
- C-Lever – quarter turn steam tap features two positions: purge (down) or fully open (up)
- Hydro hub – integrated manifold for precise water delivery and distribution
- Multifunction onboard computer and USB port for simple programming and data transfer
- Independent water pump and steam pressure control gauges keep you in control
- Built-in volumetric rotary vane water pump for simple and safe installation
- Steam boiler pressure control with mechanical pressure stat
- Automated cleaning programme simplifies your daily clean

#### OVERALL CONSTRUCTION

- Hand rolled copper steam boiler -11 litre capacity
- Brushed stainless steel front and rear panels
- Anthracite black ABS nylon side panels
- Optional ice white side panels
- Backflow valve on boiler and steam tap
- Adjustable feet with optional extensions

#### CONTROLS

- Soft-touch keypads with 4 programmable drink dosing pre-sets for easy espresso preparation
- White LED backlights easy to read keypad buttons
- Two manual steam wands for frothing and steaming milk

#### CLEANING AND MAINTENANCE

- Stainless steel drip tray - dishwasher safe
- Easy Clean manages the cleaning process of group heads to perform automatically
- Genuine cleaning products sold separately

#### INCLUDES

- iSteam retrofit kit factory fitted
- 1 x Single group handle
- 1 x Single filter basket – 16g
- 2 x Double group handle
- 2 x Double filter basket – 21g
- 1 x Rubber blind filter disc
- 1 x Group head cleaning brush
- User manual / Warranty card

#### MATCHING PRODUCTS



CLASSE 5 USB  
TALL 1 GROUP



CLASSE 5 USB  
TALL 2 GROUP COMPACT



CLASSE 5 USB  
TALL 2 GROUP



CLASSE 5 USB  
TALL 3 GROUP



CLASSE 7 USB  
TALL 2 GROUP



CLASSE 7 USB  
TALL 3 GROUP



KYRO EVO

# Classe 7 USB Tall - RC2G C7EVO BLK IS

## RANCILIO CLASSE 7 USB TALL 2 GROUP ISTEAM

### TECHNICAL INFORMATION

#### Dimensions

Width:	771mm
Depth:	539mm
Height:	520mm
Nett weight:	57kg
Boiler Capacity:	11 litres

#### ELECTRICAL

Power requirements: 240V, 1P+N+E,  
50/60Hz, 4.3kW, 20A cordset fitted  
Boiler Power: 3.75kW



### WATER CONNECTIONS AND DRAINS

- 40mm PVC drain and waste trap - 300mm upstand
- Fixed water supply connection
- Mains cold water 3/8" BSP male thread connection
- Flow pressure: 200kPa -500kPa, min 4L/min



Australia

[www.moffat.com.au](http://www.moffat.com.au)

New Zealand

[www.moffat.co.nz](http://www.moffat.co.nz)

Australia  
Moffat Pty Limited

Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone +61 3-9518 3888  
Facsimile +61 3-9518 3833  
[vsales@moffat.com.au](mailto:vsales@moffat.com.au)

New South Wales  
Telephone +61 2-8833 4111  
[nswsales@moffat.com.au](mailto:nswsales@moffat.com.au)

South Australia  
Telephone +61 3-9518 3888  
[vsales@moffat.com.au](mailto:vsales@moffat.com.au)

Queensland  
Telephone +61 7-3630 8600  
[qldsales@moffat.com.au](mailto:qldsales@moffat.com.au)

Western Australia  
Telephone +61 8-9413 2400  
[wasales@moffat.com.au](mailto:wasales@moffat.com.au)

New Zealand  
Moffat Limited

Christchurch  
45 Illinois Drive  
Izone Business Hub  
Rolleston 7675  
Telephone +64 3-983 6600  
Facsimile +64 3-983 6660  
[sales@moffat.co.nz](mailto:sales@moffat.co.nz)

Auckland  
Telephone +64 9-574 3150  
[sales@moffat.co.nz](mailto:sales@moffat.co.nz)



In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.


© Copyright Moffat Ltd  
AN.RAN.2301

### RANCILIO WATER SPECIFICATION

Optimum Parameter	Measurement Range
	Never more than 50 PPM more than to Total Hardness
TDS <135	
Carbonate Hardness 50 ppm	40-90 ppm
Total Hardness 85 ppm	50-100 ppm
pH (ideal) 7	6.5 – 8.5
Chlorides Cl -	< 30 ppm

### INSTALLATION CLEARANCE

- Allow 152.4mm / 6" clearance on all sides of the machine.
- Allow 609mm x 127mm / 24" x 5" for in-line filter. Filter can be mounted behind the machine or under the counter.
- Allow a minimum of 3" (762 mm) clear space under filter to facilitate filter change.
- All services to be within 1m of machine placement
- Always refer to installation manual

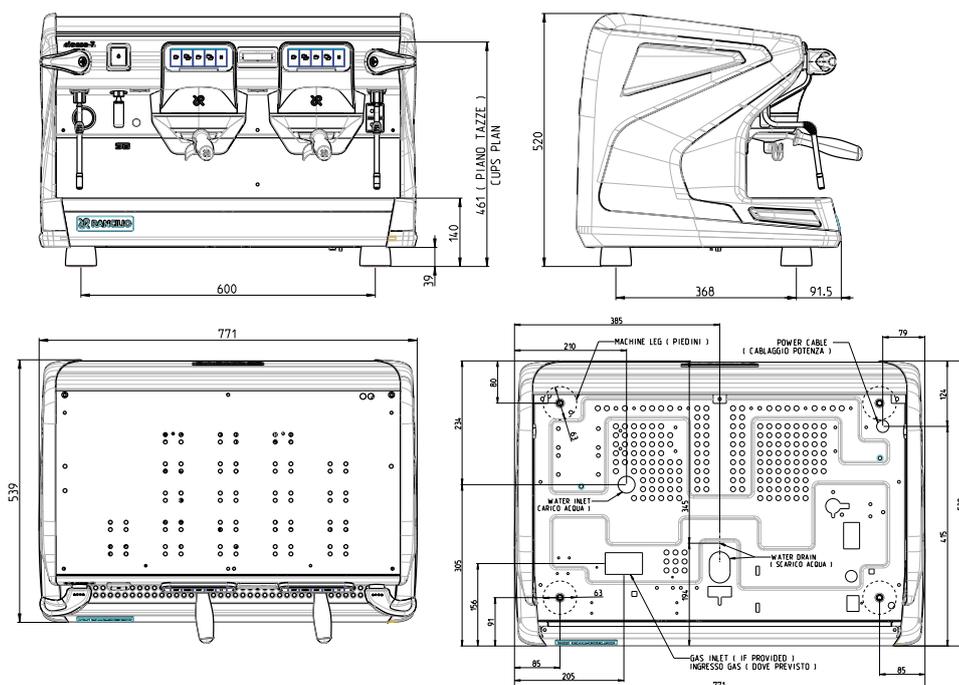

Specifications may vary between models

an Ali Group Company



The Spirit of Excellence