

WD-PRM60 PRE-RINSE MACHINE – STRAIGHT INSTALLATION

STANDARD FEATURES:

- 30 litre wash tank volume
- 0.75kW wash pump
- Suitable for straight installation for bar feeding or chain conveyor configuration
- Dual removable upper & lower wash arms
- Uses 'free' overflow water from main machine
- Large and easily removable scrap tray
- Removable doors for easy cleaning
- Includes electrical connection of the PRM to the rack conveyor

TECHNICAL INFORMATION:

Dimensions

Width: 700mm
Depth: 691mm
Height: 1400mm
1950mm (door open)

Water

Water supplied by main machine




Waste

Connection:
50mm dia (not supplied)
Floor drain, capacity:
3 litres per second

Electrical

*Power via MAIN machine

Refer operator manual for complete installation instructions

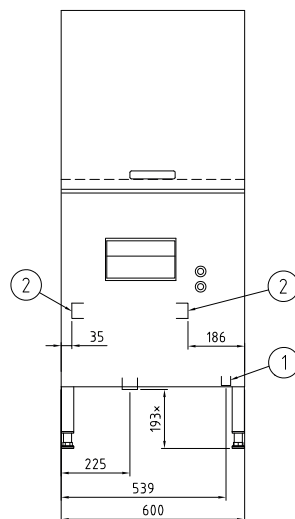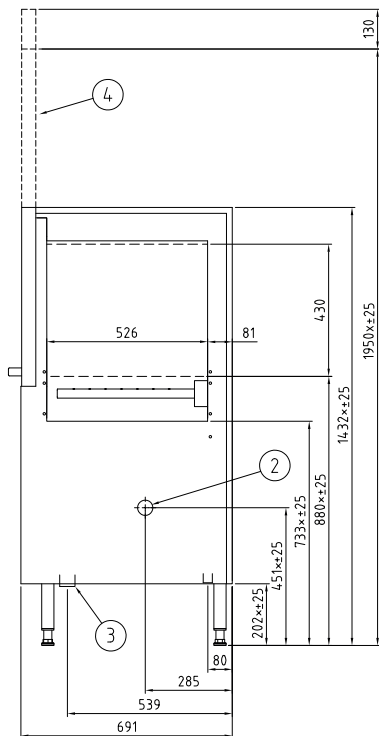

1. Electrical connection
2. Water connection from dish washing machine ø50
3. Drain ø50, 3 l/sek
4. Door (open position)

Australia

moффat.com.au

Moffat Pty Limited
740 Springvale Road
Mulgrave
Victoria 3170
Australia
Telephone +613-9518 3888
Facsimile +613-9518 3833
vsales@moffat.com.au

New Zealand

moффat.co.nz

Moffat Limited
45 Illinois Drive
Izone Business Hub
Rolleston 7675
New Zealand
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.