

RANGE	CODE	MODEL	FUNCTION
MI - 90	MAMCOOO4680	BR98G80	Bratt Pans

ITEM

Gas tilting bratt pan 80 litres with manual tilt



RANGE	CODE	MODEL	FUNCTION
MI - 90	MAMCOOO4680	BR98G80	Bratt Pans

ITEM

Gas tilting bratt pan 80 litres with manual tilt



TECHNICAL SPECIFICATIONS

WIDTH (mm):	800
DEPTH (mm):	920
HEIGHT (mm):	900
WEIGHT (Kg):	180
VOLUME (m ³):	1
GAS POWER (kW):	20
EL. POWER (kW):	0.015
VOLTAGE:	220-240 IN
COOKING ZONES N°:	1
COOKING ZONE DETAILS:	1x 20kW
TANK DIM. (mm):	770x710x200(h)mm
TANK N°:	1
CAPACITY (L):	80
IP GRADE:	IPX5
TEMP. RANGE (°C):	100-280

DESCRIPTION


Freestanding gas tilting bratt pan in AISI 304 stainless steel. Top designed for flush alignment with hermetic seal supplied. Cooking tank with manual lifting mechanism, in stainless steel, 80-litre capacity, with 10 mm gauge bottom in Duplex. Rectangular with radiused corners for improved cleaning. Double skinned lid with drip zone at rear to convey condensate into the pan, fitted with sturdy AISI 304 stainless steel hinges with spring balancing. Pushbutton controlled automatic tank filling with water. Fixed water tap positioned on the top. Satin-finish tubular AISI 304 steel handle with front grip, joined to lid. Heating by means of steel burner with stabilized flame underneath the tank, gas safety valve with thermocouple. Heat control knob shaped to prevent water infiltration, equipped with integral indicator light for instant recognition of correct operation of the appliance. Electric pilot burner ignition operated by gas valve pushbutton Thermostat controlled temperature adjustable from 100°C to 280°C. Safety system to interrupt heating when tank is raised. The product complies with EC regulation 1935/2004 and Italian ministerial decree 21/03/1973 (Materials and Objects intended to come into contact with Food) MOCA. Appliance equipped with stainless steel adjustable feet.



RANGE	CODE	MODEL	FUNCTION
MI - 90	MAMCOOO4680	BR98G80	Bratt Pans

ITEM

Gas tilting bratt pan 80 litres with manual tilt

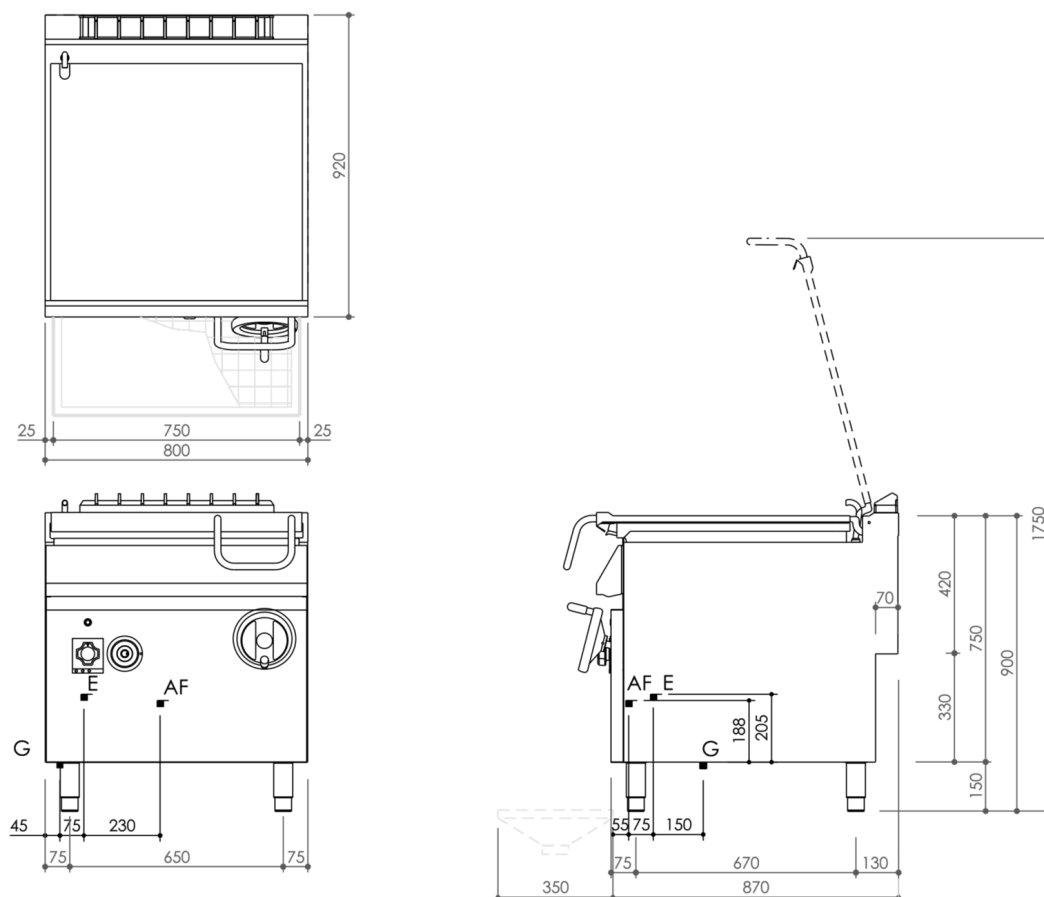

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:	220-240 IN 50Hz
(G) Gas Inlet:	Ø1/2"
(AF) Cold Water Inlet:	Ø1/2-H=100mm.

