

RANGE	CODE	MODEL	FUNCTION
MI - 60/70/90/110	MACRO000830	BRT3PTNSP	Refrigerated Bases

ITEM

**3 door refrigerated counter -2+8°C without worktop**



RANGE	CODE	MODEL	FUNCTION
<b>MI - 60/70/90/110</b>	<b>MACRO000830</b>	<b>BRT3PTNSP</b>	<b>Refrigerated Bases</b>

ITEM

**3 door refrigerated counter -2+8°C without worktop**



**TECHNICAL SPECIFICATIONS**

RANGE:	<b>-2/+8</b>
WIDTH (mm):	<b>1600</b>
DEPTH (mm):	<b>650</b>
HEIGHT (mm):	<b>610</b>
WEIGHT (Kg):	<b>150</b>
VOLUME (m <sup>3</sup> ):	<b>0.69</b>
EL. POWER (kW):	<b>0.17</b>
VOLTAGE:	<b>VAC230</b>
FREQUENCY (Hz):	<b>50Hz</b>
INTERNAL DIM. (mm):	<b>1204x550x615H</b>
EXTERNAL MATERIAL:	<b>304</b>
INTERNAL MATERIAL:	<b>304</b>
GROSS CAPACITY (L):	<b>228</b>
OPERATING MODE:	<b>Fan-assisted</b>
DOORS:	<b>3</b>
STANDARD EQUIPMENT:	<b>n. 3 Plastic-coated Grid GNI/I</b>
DEFROST TYPE:	<b>Hot gas</b>
REFRIGERANT POWER:	<b>425</b>
ENERGY CLASS: <b>A</b>	GAS TYPE: <b>R290/3</b>
REFRIGERANT QUANTITY (g):	<b>60</b>
NOISE LEVEL:	<b>51</b>
ENERGY PER YEAR:	<b>535</b>
CLIMATE CLASS:	<b>5 +40°C 40%</b>

**DESCRIPTION**


Refrigerated cupboard (-2+8°C) without worktop for countertop installation of MI 60, 70 and 90 series cooking elements. 3 doors. AISI 304 stainless steel, monocoque structure. Energy efficiency class A. Insulation thickness 50 mm (CFC and HCFC free). Ventilated refrigeration. Automatic defrosting. Defrosting water evaporation. R290 refrigerant gas. Reversible door. Tool-free easy-to-replace magnetic seal. Bottom with radiused corners. Corrosion-resistant evaporator. Height adjustable feet. Standard supply: 1 GN I/I grille per door. Digital remote control thermostat.



RANGE	CODE	MODEL	FUNCTION
MI - 60/70/90/110	MACROOOO830	BRT3PTNSP	Refrigerated Bases

ITEM

**3 door refrigerated counter -2+8°C without worktop**

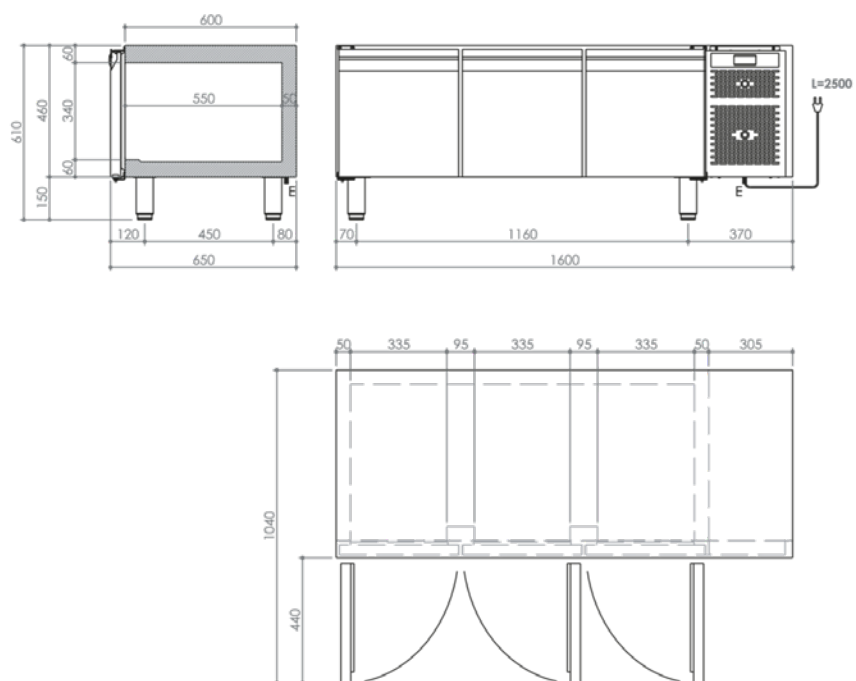

**INSTALLATION SPECIFICATIONS**

(E) Electrical Connection: **VAC230 50Hz**

Type of electrical plug:

