



DIMENSIONS (mm)

400W X 920D X 900H

TECHNICAL DATA

Power Supply:	3NAC 400V 50Hz (Lead & Plug not included)
Electrical Power (kW):	8.5
Cooking Zones:	1
Capacity (L):	42
Temp. Range (°C):	0 - 100
IP Grade:	IPX5

SHIPPING DATA

Net Weight (Kg):	59
Shipping Weight:	TBA
Shipping Dimensions:	TBA

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


Freestanding electric pasta cooker in AISI 304 stainless steel. 2 mm pressed steel top with anti-spill front edge and tank perimeter well with wide expansion zone for foam. Top designed for flush alignment with hermetic seal supplied for leak proofness. Deep drawn tank in AISI 316 polished stainless steel with radiused bottom for ease of cleaning. Water filling via ball valve with fine flow rate adjustment. Water tap located in zone protected against accidental impact. Heating with armoured immersion-type heating elements for optimised performance, foldable to facilitate tank cleaning. Heat control knob shaped to prevent water infiltration, equipped with integral indicator lights for instant recognition of heating and correct operation of the appliance. Heating control by means of energy regulator for more effective boiling control and energy saving in the stand-by position. Tank capacity 42 litres. Tank dimensions: 305x510x285h mm. Water drainage by means of accessible tap located in lower cabinet. Safety guaranteed by pressure switch that prevents heating if tank is empty. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.

STANDARD FEATURES

- 2mm thick pressed stainless top
- IPX5 water protection
- Modular design
- Enhanced Mareno knob with indicator lights to inform user of machine operating status
- NEW interlocking device & seal supplied with all units
- Space at rear for connection

OPTIONAL FEATURES

- Castor kit
- Pasta Baskets

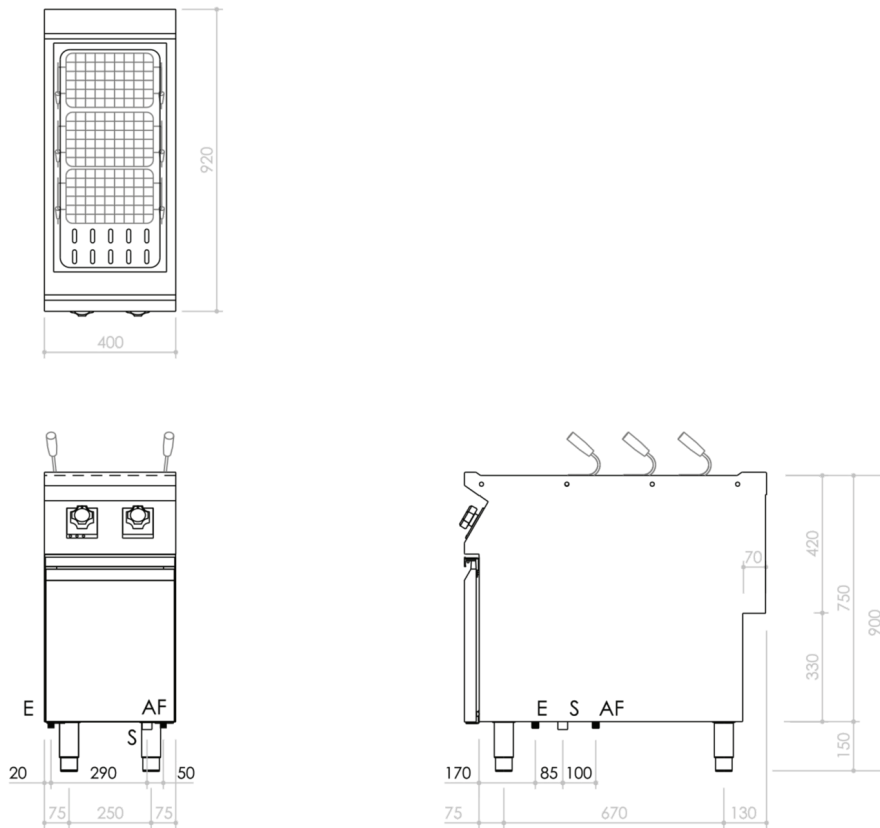

Disclaimer: The images and line drawings provided are for reference only and may not exactly match the specifications of the equipment.

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:
(AF) Cold Water Inlet:

3NAC 400V 50Hz
Ø 3/4-H=100mm.