

RANGE	CODE	MODEL	FUNCTION
MI - 70	MAMCOOOO460	CV78EFEV	Glassceramic Ranges

ITEM

4 ceramic electric hotplate fan assisted electric oven range



RANGE	CODE	MODEL	FUNCTION
MI - 70	MAMCOOOO460	CV78EFEV	Glassceramic Ranges

ITEM

4 ceramic electric hotplate fan assisted electric oven range



TECHNICAL SPECIFICATIONS

WIDTH (mm):	800
DEPTH (mm):	750
HEIGHT (mm):	900
WEIGHT (Kg):	106
VOLUME (m ³):	0.8
EL. POWER (kW):	14.2
VOLTAGE:	VAC400-3N
INTERNAL OVEN DIM. (mm):	570x490x295h mm
OVEN CAPACITY:	3x 530x490mm
OVEN POWER (kW):	4.2
COOKING ZONES N°:	4
COOKING ZONES DIM. (mm):	4x Ø 250mm
COOKING ZONE DETAILS:	4 x 2,5 kW
IP GRADE:	IPX5
OVEN TEMP. RANGE (°C):	0-280

DESCRIPTION


Freestanding glass ceramic electric boiling top, on ventilated electric oven, in AISI 304 stainless steel. 20/10 pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. 6 mm thick glass ceramic cooking surface hermetically sealed to the top and designed to create 4 independent cooking zones, each with underlying 2.5 kW Ø 250 mm radiant elements to reach maximum temperature of 400°C in 3 min. Glass dimensions 746x571 mm. The cooking zones are marked by screen printed circles on the glass-ceramic surface and equipped with residual heat indicators. Energy regulator for heat control with shape designed to prevent water infiltration, with integral indicator lights for instant recognition of appliance operation. Hotplates equipped with automatic reset safety thermostat that trips if the appliance is switched on with an unsuitable pan or no pan at all. Oven complete with 1 stainless steel rack. Oven equipped with safety thermostat with a range of 110°C to 280°C. Oven dimensions: 570x490x295h mm. Oven power 4.2 kW. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.



RANGE	CODE	MODEL	FUNCTION
MI - 70	MAMCOOOO460	CV78EFEV	Glassceramic Ranges

ITEM

4 ceramic electric hotplate fan assisted electric oven range

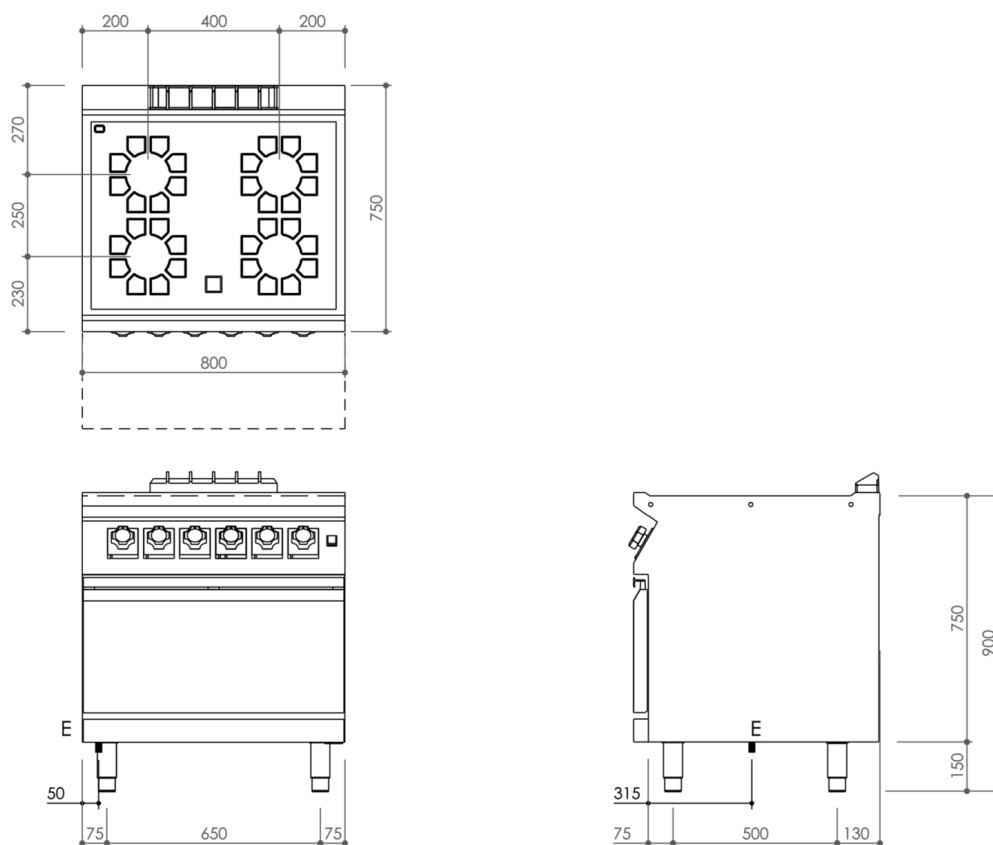

INSTALLATION SPECIFICATIONS

(E) Electrical Connection: **VAC400-3N 50/60Hz**

