



DIMENSIONS (mm)

400W X 920D X 900H

TECHNICAL DATA

Power Supply:	3NAC 400V 50Hz (Lead & Plug not included)
Electrical Power (kW):	18
Cooking Zones:	1
Capacity (L):	22
Temp. Range (°C):	100 – 185
IP Grade:	IPX5
Internal Base Unit Dimensions (mm):	360W X 900D x 400H

SHIPPING DATA

Net Weight (kg):	62
Shipping Weight:	TBA
Shipping Dimensions:	TBA

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


Freestanding electric fryer on cabinet base, in AISI 304 stainless steel. 2 mm pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied for leak proofness. Pressed AISI 304 stainless steel cooking tank, with radiused internal profile. Tank capacity 22 litres. Tanks with wide front expansion zone for oil and foam and extended cold zone for collection of food particles. Heating by means of an armoured immersion-type heating element in AISI 304 stainless steel. The element can be rotated by over 90° to facilitate tank cleaning. Tank oil temperature adjustable from 100 to 185 °C. Heat control thermostat with shape designed to prevent water infiltration, with integral indicator lights for instant recognition of appliance operation. Fryer equipped with manual reset safety thermostat that trips in overtemperature conditions. Removable filter, basket, lid and pipe for supplied drain tap. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.

STANDARD FEATURES

- 2mm thick pressed stainless top
- IPX5 water protection
- Modular design
- Enhanced Mareno knob with indicator lights to inform user of machine operating status
- NEW interlocking device & seal supplied with all units
- Space at rear for connection

OPTIONAL FEATURES

- Cabinet Doors
- Castor kit

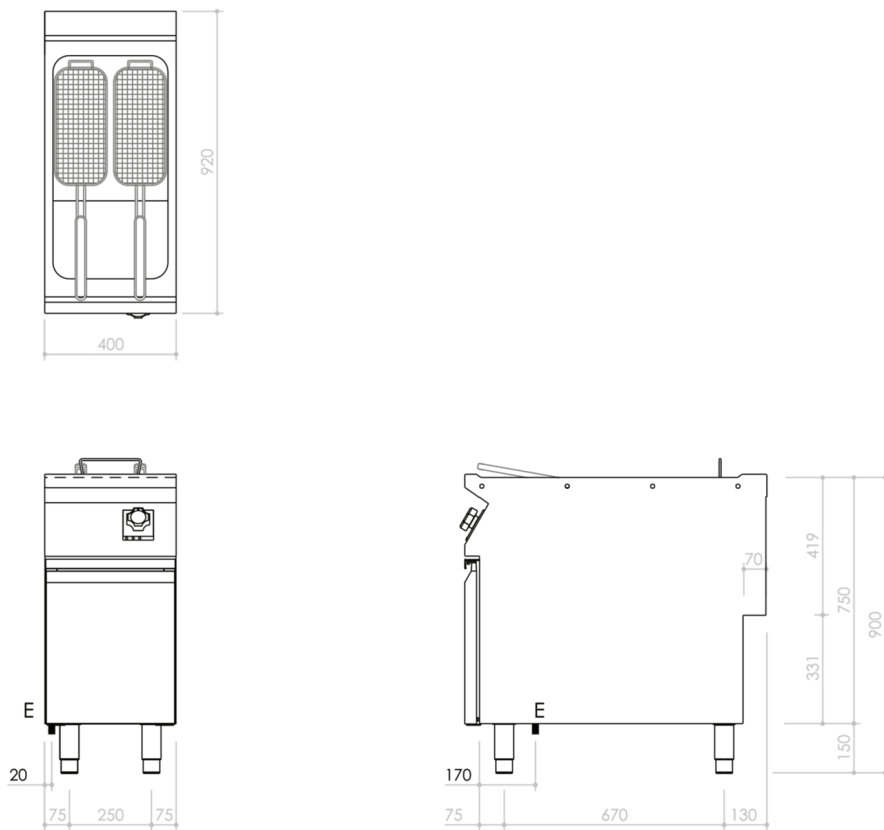

Disclaimer: The images and line drawings provided are for reference only and may not exactly match the specifications of the equipment.

INSTALLATION SPECIFICATIONS

(E) Electrical Connection: 3NAC 400V 50Hz