


DIMENSIONS (mm)

800W X 920D X 900H

TECHNICAL DATA

| | |
|-------------------------------------|--|
| Gas Type | Natural or Propane |
| Total Output (Gas) | Natural - 78 MJ/h Propane - 75.6 MJ/h |
| Cooking Zones: | 2 |
| Cooking Zones Dimensions (mm): | 735W X 700D |
| Temp. Range (°C): | 90 - 280 |
| Plate Type: | Smooth Chromed Plate |
| Internal Base Unit Dimensions (mm): | 720W X 900D x 400H |
| AGA Approval Number | 7417 |

SHIPPING DATA

| | |
|----------------------|-----|
| Net Weight (Kg): | 136 |
| Shipping Weight: | TBA |
| Shipping Dimensions: | TBA |

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


Freestanding gas griddle on open cabinet base, in AISI 304 stainless steel. 2 mm pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied for leak proofness. Top designed to accommodate water column accessory. Cooking surface with smooth mirror-polished chrome hotplate. Hotplate recessed 40 mm compared to worktop, fully welded construction for guaranteed ease of cleaning. Cooking surface with 65 mm cold zone at front of hotplate. Round Ø 40 mm drain hole for fat. Grease collection tub with 1.5 litre capacity. Heating by means of steel stabilised flame burner having 2 branches and 4 rows of flames for each zone, complete with pilot flame and safety thermocouple. Heating control knob shaped to prevent water infiltration. Gas supply controlled by thermostatic valve with safety thermocouple. Cooking temperature manually controlled from 90°C to 280°C. Automatic ignition by means of piezoelectric device with waterproof cap. Cooking surface 735x700 mm. Scraper supplied for smooth hotplate.

STANDARD FEATURES

- 2mm thick pressed stainless top
- Modular design
- Enhanced Mareno knob with indicator lights to inform user of machine operating status
- NEW interlocking device & seal supplied with all units
- Space at rear for connection

OPTIONAL FEATURES

- Cabinet Doors
- Hygienic cabinet base with pressed runners
- Top only
- Refrigerated base
- 50mm stainless steel frame for counter installation
- Castor kit

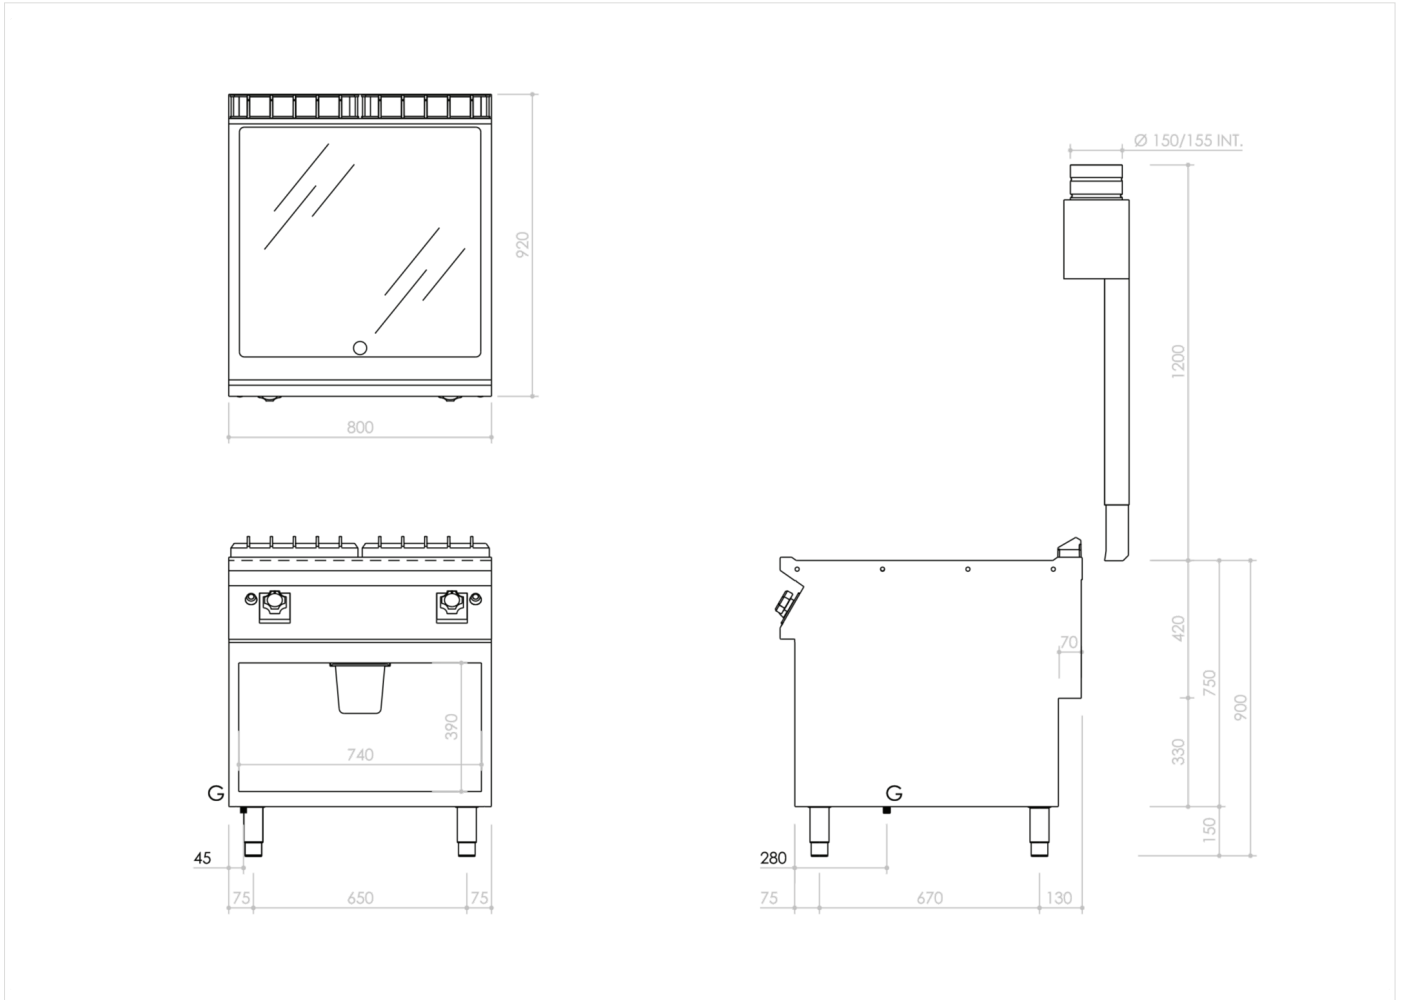

Disclaimer: The images and line drawings provided are for reference only and may not exactly match the specifications of the equipment.

INSTALLATION SPECIFICATIONS

(G) Gas Connection: $\varnothing 1/2''$