

M1 70 SERIES 800MM WIDE ELECTRIC 4 BURNER ELECTRIC STATIC OVEN RANGE



DIMENSIONS (mm)

800W X 750D X 900H

TECHNICAL DATA

Power Supply:	3NAC 400V 50Hz (Lead & Plug not included)
Electrical Power (kW):	16.4
Cooking Zones:	4
Cooking Zones Dimensions (mm):	Ø 220
IP Grade:	IPX5
Internal Oven Dimensions (mm):	570W X 490D X 295H
Oven Capacity:	3 X GN 2/1
Oven Power (kW):	6
Oven Temp. Range (°C):	0 - 280

SHIPPING DATA

Net Weight (Kg):	106
Shipping Weight:	TBA
Shipping Dimensions:	TBA

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


Freestanding electric cook top, on static electric oven, in AISI 304 stainless steel. 2 mm pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied for leak proofness. Top designed to accommodate water column accessory. Appliance composed of 4 Ø 220 mm round hotplates in cast-iron, hermetically sealed to the top, each with 2.6 kW output. Hotplates equipped with automatic reset safety thermostat which trips in the event the appliance is switched on without a pan. 7-position selector switch for heat adjustment. Indicator light to show correct operation of the appliance. Ergonomic knobs shaped to prevent water infiltration, equipped with integral indicator lights for instant recognition of operation and temperature. GN 2/1 conventional electric oven. Oven heated by independently controlled top and bottom heating elements. Thermostat control providing temperature adjustment from 110°C to 280°C. Stainless steel oven chamber, dimensions 570x490x295h mm. Heavy gauge enamelled steel oven bottom. Oven inner door in stainless steel with labyrinth seal. 4-position selector switch, safety thermostat. Indicator lights indicating correct oven operation. Oven power 6 kW. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.

STANDARD FEATURES

- 2mm thick pressed stainless top
- IPX5 water protection
- Modular design
- Enhanced Mareno knob with indicator lights to inform user of machine operating status
- NEW interlocking device & seal supplied with all units
- Space at rear for connections

OPTIONAL FEATURES

- Castor kit

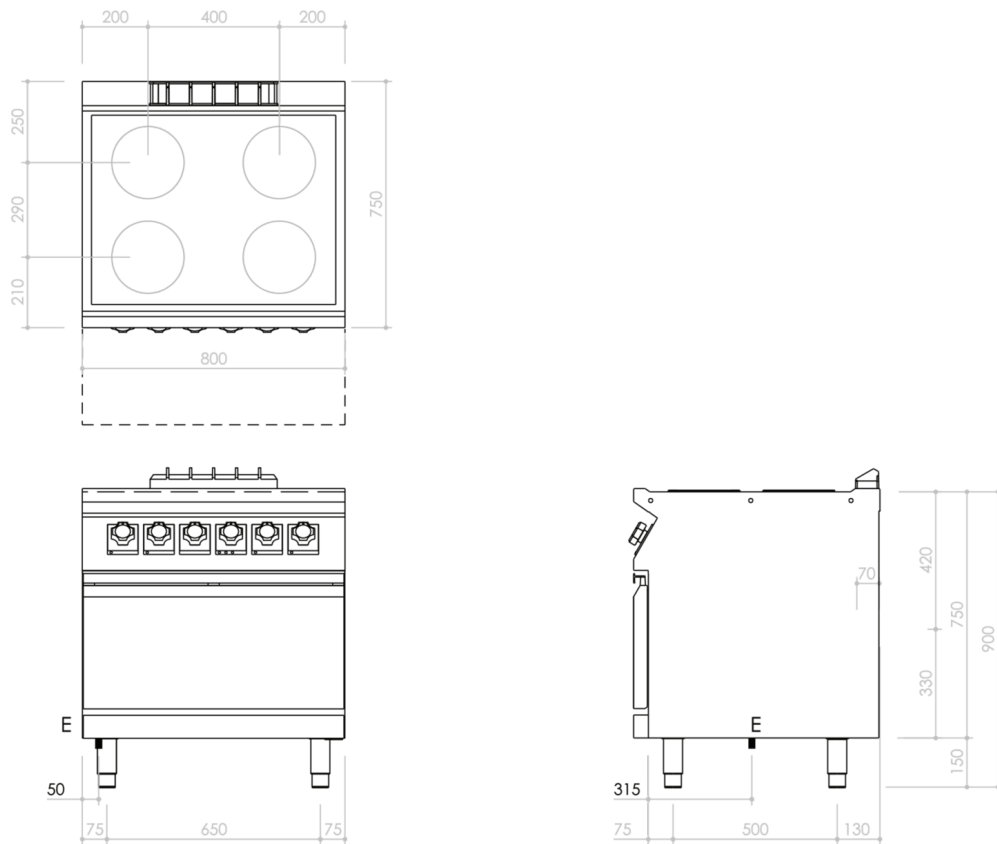

Disclaimer: The images and line drawings provided are for reference only and may not exactly match the specifications of the equipment.

INSTALLATION SPECIFICATIONS

(E) Electrical Connection: 3NAC 400V 50Hz