



DIMENSIONS (mm)

800W X 920D X 900H

TECHNICAL DATA

Power Supply:	3NAC 400V 50Hz (Lead & Plug not included)
Electrical Power (kW):	22
Cooking Zones:	4
Cooking Zones Dimensions (mm):	300 X 300
IP Grade:	IPX5
Internal Oven Dimensions (mm):	575W X 654D X 300H
Oven Capacity:	2 X GN 2/1
Oven Power (kW):	6
Oven Temp. Range (°C):	0 - 280

SHIPPING DATA

Net Weight (Kg):	138
Shipping Weight:	TBA
Shipping Dimensions:	TBA

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



Electric cook top on static electric oven, in AISI 304 stainless steel. 2 mm pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied for leak proofness. Top designed to accommodate water column accessory. Appliance comprising 4 cast-iron 300x300 mm square hotplates, hermetically sealed to the top, each with 4 kW output. Ergonomic knobs shaped to prevent water infiltration, equipped with integral indicator lights for instant recognition of operation and temperature. 7-position heat adjustment. Hotplates equipped with automatic reset safety thermostat that trips if the appliance is switched on with an unsuitable pan or no pan at all. GN 2/1 conventional electric oven. Oven heated by independently controlled top and bottom heating elements. Thermostat for temperature control from 110°C to 280°C. Ergonomic knobs shaped to prevent water infiltration, with integral indicator lights for instant recognition of operation, the temperature reached, and safety thermostat trip condition. Stainless steel oven chamber, dimensions 575x700x300h mm. Oven power 6 kW. Heavy gauge enamelled steel oven bottom. Pressed stainless steel oven inner door with labyrinth seal. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.

STANDARD FEATURES

- 2mm thick pressed stainless top
- IPX5 water protection
- Modular design
- Enhanced Mareno knob with indicator lights to inform user of machine operating status
- NEW interlocking device & seal supplied with all units
- Space at rear for connections

OPTIONAL FEATURES

- Castor kit

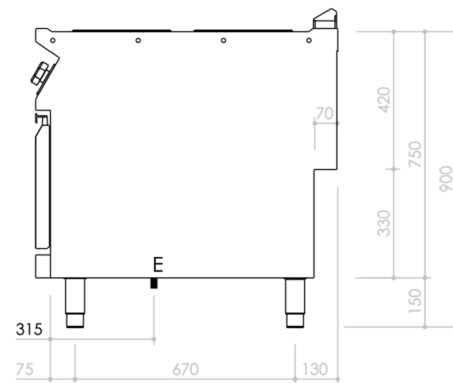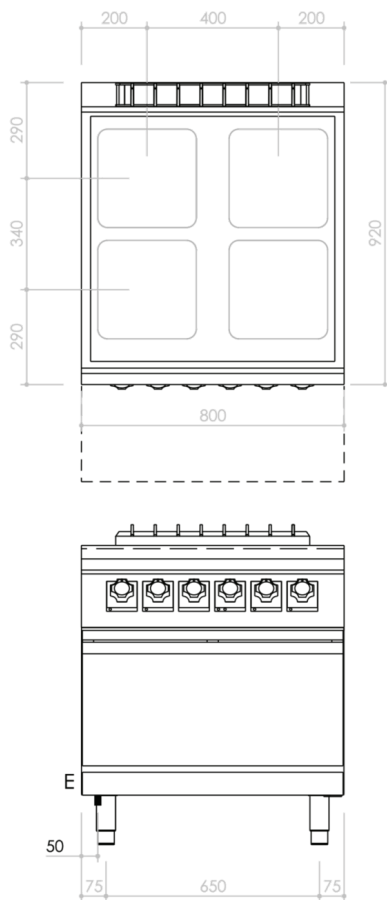

Disclaimer: The images and line drawings provided are for reference only and may not exactly match the specifications of the equipment.

INSTALLATION SPECIFICATIONS

(E) Electrical Connection: 3NAC 400V 50Hz