



## RRFF22E

Floor regenerating  
 cabinet (+3°C→+65°C)  
 Pass-through

### CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Internal AISI 304 18/10 stainless steel bumpers for trolley's introduction
- Total thermic insulation with rock or glass wool
- Long lasting front seals made up of food grade of high heat resistance
- Ventilated heating provided by high efficiency protected heating elements
- Door fitted with three point locking system
- Easy access to facilitate maintenance and repair

### FUNCTIONAL FEATURES

- Electronic control panel of temperature, time and humidity with LCD touch-screen
- End-of-cycle buzzer
- Simplified, user-friendly control
- Automatic control of the humidity's percentage in the chamber, Climachef system
- Operating temperature: 30°C - 160°C
- Automatic humidity vent
- Chamber can accommodate different sized plate or tray rack transport trolleys
- Chamber with safety thermostat
- Delayed start timer
- Intelligent temperature decrease in the cavity at the end of the regenerating cycle allows a perfect warm holding

### STANDARD SUPPLY

- Climachef

### OPTIONS & ACCESSORIES

- ☐ Core probe with the possibility to register 30 different temperatures and save them in the HACCP report (available only with USB port device)
- ☐ Concealed water storage tank
- ☐ USB port saving device HACCP
- ☐ GN pans cart
- ☐ Plates cart
- ☐ Cart thermal cover
- ☐ Glass door and lighting
- ☐ Multipoint core probe
- ☐ Speedgrade fan speed reduction system
- ☐ External hand shower



# moduline

**Overall dimensions**  
(W x D x H) - mm

1150 x 830 x 1950

**Oven interior**  
(W x D x H) - mm

780 x 705 x 1860

**Trays capacity**

20 x GN 1/1

**Plates capacity**  
Plates Ø 230-310

80

**Power kW**

12,5

**Power supply**

3N AC 400V 50Hz

**Rated voltage**  
[Vac]

3N - 400V

**Total input [kW]**

12,5

**Amps. [A]**


18

**Connecting wire**  
min. section (type  
H07 RN-F) [mm²]

5 x 2,5

**Water pressure**  
[kPa]

150 ÷ 500

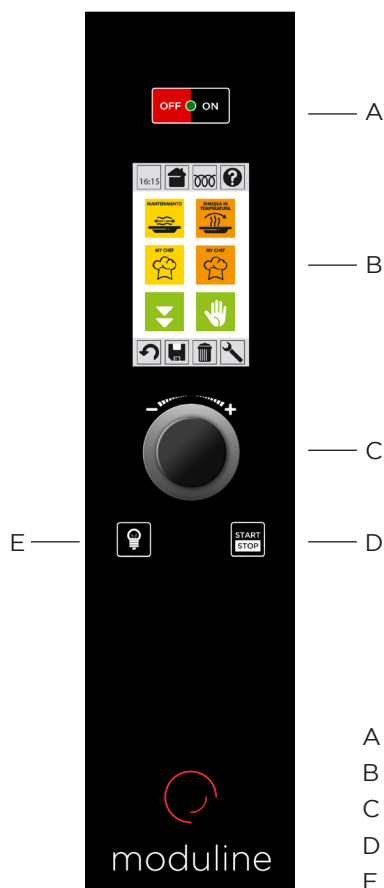

- A ON/OFF switch
- B Display
- C Setting knob and select "Enter"
- D START/STOP button
- E Chamber light button

**MODULINESRL**

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY  
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it