

HOBART

WAREWASHING
UTENSIL WASHER **UPT**


**INDUSTRY
KITCHENS**

www.industrykitchens.com.au 1800 611 058



PREMAX UPT

The **PREMAX** UPT offers all the advantages of the **PREMAX** UP combined with double the capacity compared to a conventional twin rack utensil washer.

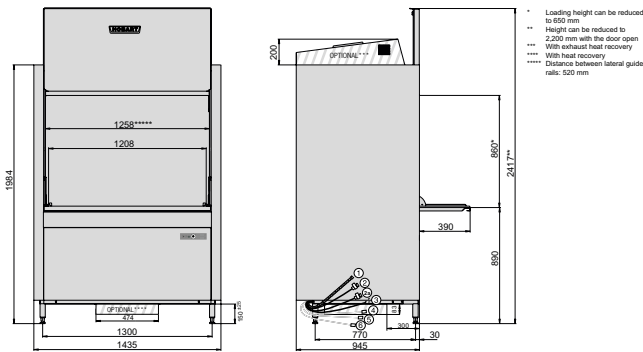

* Loading height can be reduced to 860 mm
 Height can be reduced to 2300 mm with the door open
 With exhaust heat recovery
 With heat recovery
 Distance between lateral guide rails: 520 mm

CONNECTIONS

① Drain hose	1,800 mm ID20 / OD25
② Supply hose	2,000 mm R 3/4"
Required flow rate	5 l/min
Flow pressure	0.5 - 10 bar
Max. supply water temperature	60 °C
③ Power cord	2,000 mm

Supply hose for

④ Detergent	2,500 mm
⑤ Rinse aid	2,500 mm

TECHNICAL DATA

Cycle times*	120 / 240 / 280 sec. and special cycles
Water consumption	14 l/rack
Tank capacity	130 l
Tank heating	6.1 kW
Power supply	400 / 50 / 3N

BOOSTER LOADING

Standard	18.1 kW
Alternative	9.1 kW

TOTAL LOADING

Standard	24.5 kW / 3 x 50 A
Alternative	18.5 kW / 3 x 32 A
Wash pump	2 x 2.9 kW 2 x 1,150 l/min
Rack size	1,240 x 700 mm
Loading height	860 mm
Noise level	70 dB (A)
Weight (gross / net)	325 / 305 kg

* Thermostop guarantees required temperatures with cold water connection, the actual cycle times extend accordingly.

PRODUCT ADVANTAGES

- **Extra capacity by side wash system:** capacity up to 8 GN-trays 1/1 or 5 EN2 container
- **Detergent direct spraying system:** system soaks the wash ware following the detergent pre-washing cycle and softens even the most severely encrusted food residues
- **VISIOTRONIC control:** single button control with remaining time indicator together with text and graphic display
- **SENSO-ACTIVE resource management:** constantly measures the quality of the wash water and keeps the amount of rinsing needed in each rinse cycle to the minimum in order to guarantee a fully hygienic wash result
- **POWER wash:** high-pressure washing to wash heavily soiled wash items
- **CLIP-IN wash and rinse arms:** wash and rinse arms can be removed with one hand and without any tools
- **USB-interface:** comfortable download of operational data in form of a protocol via USB
- **GENIUS-X² fine filter system:** advanced filter system with pre-wash function reduces detergent consumption up to 35 %
- **ROTOR-X wash system:** separate rotating upper and lower 4-spoke wash arms deliver dynamic wash power
- **VAPOSTOP (optional):** prevents vapour to escape from machine when door is opened
- The optional **drain heat recovery** transfers heat from hot drain water to the fresh-water supply, saving up to 12.9 kW
- The optional **exhaust heat recovery** uses steam to heat fresh feed water and reduces the amount of power needed, saving up to 7.8 kW
- **Loading height:** above-average loading height of 860 mm
- **Intelligent energy management:** the available energy is used continuously. Thus, at a low total loading value the heating time gets reduced
- **VAPO-ACTIVE steam washing:** significantly less manual pre-cleaning and second runs by intensive wash cycles with steam injection
- **Interlocked strainer:** prevents operation without tank strainer
- **EASY-CLEAN concept:** blue markings in the machine help the operator to identify the components which require cleaning
- **Hygiene programme:** for removal of calcium carbonate and other deposits from wash chamber