

# PAVAILLER

## CFI Blue Moon Retarder Proofer - AFB 68 2C2P


The AFB 68 2C2P Blue Moon are retarder proofer cabinets, of two compartments two doors, designed to receive 600x800 trays, grids or meshes.

- Humidity generator with electronic humidity probe.
- Panels insulated with polyurethane foam 42kg / m3, high pressure, 60 mm thickness, food-grade PVC coating.
- Door seals in black magnetized TPE.
- Door dampers.
- Reversible door.
- Door hinged on the right in standard (left on request).
- Batteries protected by a reinforced cathoporesis treatment.
- H.T.A. Refrigerating unit (High Ambient Temperature, +43°C max.) in standard.

**To suit 400 x 600 trays 2 trays per level  
( 20 trays per compartment ) total 40 trays**



AFB 68 2 separate compartments with separate controls			
AFB 68		Insulating and anti-skid ground + Stainless Steel ramp	
Size of Supports	600 x 800	No. of Levels	2 x 10
Number of Supports	20	Spacing Levels	63mm
Refrigerating unit	1 refrigerating unit of 7/8 CV	No. of doors	2
Refrigerating capacity at -10°C	1.3 KW	Fluid	R404A
Voltage	240V ~1PH+N+T	Frequency	50 HZ
Connecting electrical power	1.3 KW	Connection	8:00 A

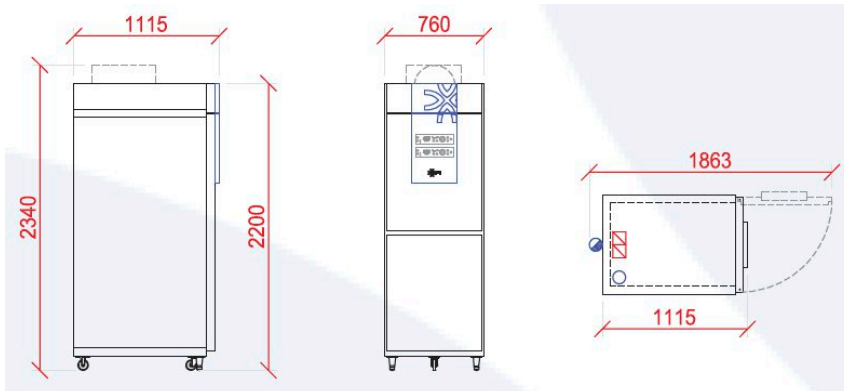

### CFI RETARDER PROOFER - AFB 68 2C2P

Model	<b>AFB 68 2C2P</b>
Rack	Rack to suit 600 x 800 mm
Power	1.3 kW 240V
Install	Assembled
High Temp. Tropical unit	Yes
Warranty	1 Year
<b>PRICE</b>	<b>\$25,740.00 +GST</b>

⚡ Power supply			⦿ Water supply			⦿ Sewage disposal	
Installation power	type of connection	height from the ground	type of connection	dimension connection	height from the ground	type of Connection	dimension connection
1.6 Kw	⦿	2.40m	⦿	15/21	2.40m	⦿	40mm

⚡ Electrical power

⦿ Wall outlet 240V mono (type E/F)

⦿ Electrical connection mono

⦿ Cold water supply (1 to 5 bars max)

⦿ Sewage disposal

⦿ Water shut-off valve

Any products out of stock may be subject to price increases on incoming stock. Please check with ABP Atlas for current availability.