

The AFC 68 ICIP Blue Moon are retarder proofer cabinets, of one compartment one door, designed to receive trolleys or ladders.

- ✓ Humidity generator with electronic humidity probe.
- ✓ Panels insulated with polyurethane foam 42kg / m³, high pressure, 60 mm thickness, food-grade PVC coating.
- ✓ Door seals in black magnetized TPE.
- ✓ Door dampers.
- ✓ Reversible door.
- ✓ Batteries protected by a reinforced cataphoresis treatment.
- ✓ Door hinged on the right in standard (left on request).
- ✓ H.T.A. Refrigerating unit (High Ambient Temperature, +43°C max.) in standard.




■ TECHNICAL DATA

**INDUSTRY
KITCHENS**

www.industrykitchens.com.au 1800 611 058

AFC 68	
Dimension of trolley/ladder	670 x 850 x H1855
Entrance of trolley	670
Number of trolley/ladder	1
Useful dimensions	E795 x P880
Number of doors	1
Refrigerating unit	7/8 CV
Refrigerating capacity at -10°C	1,3 kW
Fluid	R448A
Voltage	220-240V ~IPH+N+T
Frequency	50 Hz
Connection	6 A

■ IMPLANTATION

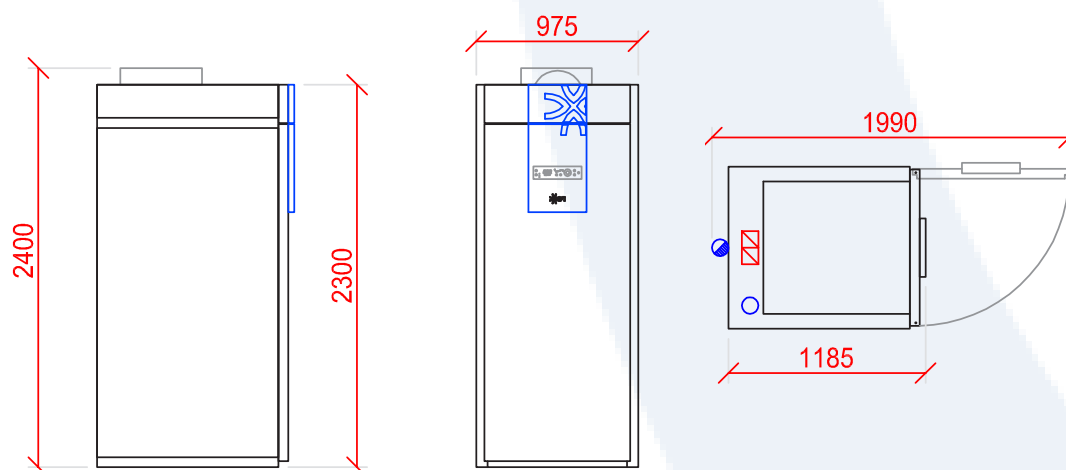

⚡ Alimentation électrique			○ ● Alimentation eau			● Evacuation eaux usées	
Puissance installation	Type de raccord.	Hauteur par rapp. au sol	Type de raccord.	Dimension du raccord.	Hauteur par rapp. au sol	Type de raccord.	Dimension du raccord.
1,3 Kw	⊙	2,50 m	⊥	Ø15/21	2,50 m	●	Ø40mm

- ⚡ Electrical power
- Cold water supply (1 to 5 bars max)
- ⊙ Wall outlet 230V mono (type E/F)
- Sewage disposal
- ⊥ Electrical connection mono
- ⊥ Water shut-off valve

■ OPTIONS AND ACCESSORIES

- Finishing : interior Stainless Steel 304 / exterior steel PVC
- Finishing : interior Stainless Steel 304 / exterior brushed Stainless Steel 430
- VapooO option : reinforced steam system by boiler(only for AFC with stainless steel interior)
- Insulating anti-skid ground, 15mm, thickness, with a stainless steel access ramp (15mm to add to the total height of the cabinet)
- Delivered dismantled