

Pegasus Series

1/1 & 2/1 Lowline GN

Food Storage

Fridge

Gastronorm Storage

Pegasus food storage fridges and freezers are built to last. Stylish design and heavy-duty construction handle the daily demands of commercial use. Their high efficiency rating delivers even temperatures, food safety, and power savings.



PGLL150



PGLL300

Standard finish: Stainless steel
Standard models: 2 & 4 drawer



Warranty
2 year protection



Food-Safe
Keeps food below 5°C

Best Suited to:



Restaurants / Cafés

Quick Service
Restaurants

Clubs / Pubs / Bars



Hospitality Venues



Accommodation



Medical / Aged Care



Schools

Quick Guide

Pegasus Series 1/1 & 2/1 Lowline GN

Premium build quality



Gastronorm 1/1 & 2/1 (GN)



Drawers



Busy - heavy duty kitchens



High ambient conditions



SKOPE premium controller



Remote available



Customisable



Standard Features

Benefits

SKOPE premium controller

Easy to use with
pre-programmed features

Heat resistant countertop

Safely place hot cooking equipment
on top

Reinforced rollers on drawer slides

Durable & designed for easy
placement of pans

Easy grip handle design

Comfortable & convenient access

Front breathing refrigeration system

Built in design to save space

Fan forced ducted airflow

Tight consistent temperature for
food safety

Heated drawer mullion

Eliminates condensation

Key locks on all drawers

Extra security

Replaceable long life magnetic drawer
gasketsReliable door seal for improved
efficiencyPremium stainless steel exterior &
interior

Very durable, easy to clean & maintain

Options

- White or black powdercoat
- Full powdercoat colour range
- Remote

- R/H services
- Plinth mounting


- 1 year extended warranty

Specifications


	PGLL150		PGLL300
Fridge/Freezer - drawers	Fridge - 2 drawer		Fridge - 4 drawer
Self Contained/Remote	Self Contained	Remote	Remote
Model ID	PGLL150	PGLL150r	PGLL300r
External			
Dimensions (W x D x H mm)	1500 x 700 x 520	1200 x 700 x 520	1800 x 700 x 520
Total floor area (m²)	1.05	0.84	1.26
Weight (kg)	95	85	115
Electronic controller	Yes		Yes
Remote duty (Watts @ SST)	N/A	300W @ -5°C	372W @ -5°C
Breathes from / Expels air to	Front / front		Front / front
Cabinet construction	Stainless steel		Stainless steel
Drainage (plumbing required)	No	Yes	Yes
Locks as standard	Yes		Yes
Can be plinth mounted	Yes		Yes
Supplied with legs & castors	Yes		Yes
Internal			
Gross volume (litres)	150		300
Lighting	None		None
No. of drawers	2		4
Coved floor	Yes		Yes
Internal material	Stainless steel		Stainless steel
Performance			
Maximum ambient temperature	40°C		40°C
Operating temperature	1°C to 4°C		1°C to 4°C
Refrigerant / charge	R134a	Specify	Specify
Electrical			
Electrical power (kW)	0.82	0.08	0.82
Current draw (Amps)	3.40	0.32	3.40
10 Amp 3 pin plug	Yes		Yes

Line Drawings

PCLL150

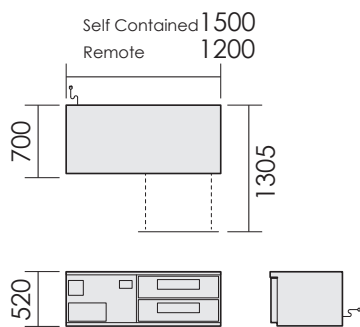

PCLL300

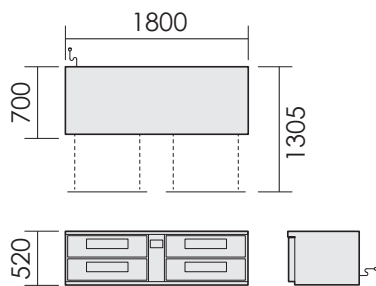

Cabinet height variation:

With supplied castors, add 95mm-120mm

With supplied adjustable legs, add 150mm-180mm

With optional plinth, add 34mm

The product information presented is for guideline purposes only. Always refer to the latest product specification sheet for accuracy and detail, and allow for dimensional tolerances (see glossary).