

# Pegasus Series 2/1 Preparation GN

## Food Preparation

Fridge

Gastronorm Storage

Pegasus pizza and sandwich food prep fridges provide quick access to fresh ingredients, and hygienic easy-clean preparation space. A constant flow of chilled air maintains consistent temperatures to ensure your toppings and fillings are served fresh each day.



PG500 Prep



PG800 Prep

Standard finish: Stainless steel

Standard models: 2 & 3 Solid door



Warranty  
2 year protection



Food-Safe  
Keeps food below 5°C

Best Suited to:



Restaurants / Cafés



Quick Service Restaurants



Clubs / Pubs / Bars



Hospitality Venues



Accommodation



Medical / Aged Care



Schools

# Quick Guide

## Pegasus Series 2/1 Preparation GN

|                            |   |
|----------------------------|---|
| Premium build quality      | ✓ |
| Gastronorm 2/1 (GN)        | ✓ |
| Busy - heavy duty kitchens | ✓ |
| SKOPE premium controller   | ✓ |
| Remote available           | ✓ |
| Customisable               | ✓ |

### Standard Features

|                                      |
|--------------------------------------|
| SKOPE premium controller             |
| Self closing, self sealing doors     |
| Front breathing refrigeration system |
| Fan forced ducted airflow            |
| Heated fascia                        |
| Key locks on all doors               |
| Sliding night covers                 |

### Benefits

|  |
|--|
| Easy to use with pre-programmed features |
| Convenient & reliable                    |
| Built in design to save space            |
| Consistent temperature for food safety   |
| Eliminates condensation                  |
| Extra security                           |
| Convenient & easy to remove for access   |

### Options


|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>White or black powdercoat</li> <li>Full powdercoat colour range</li> <li>Remote</li> <li>R/H services</li> <li>2 drawers per door</li> </ul> | <ul style="list-style-type: none"> <li>Extra shelf &amp; slides/clips</li> <li>Plinth mounting</li> <li>1-6 pans &amp; dividers</li> <li>Removable insulated night lid</li> <li>Stainless steel punched shelves</li> </ul> |
| <ul style="list-style-type: none"> <li>1 year extended warranty</li> </ul>  |  |

## Specifications


| Fridge/Freezer - doors                    | PG500 Prep          |             | PG800 Prep           |             |
|---|---------------------|-------------|----------------------|-------------|
|   | Fridge - 2 door     |             | Fridge - 3 door      |             |
|   | Self Contained      | Remote      | Self Contained       | Remote      |
| Model ID                                  | PG500Prep           | PG500Prepr  | PG800Prep            | PG800Prepr  |
| <b>External</b>                           |                     |             |                      |             |
| Dimensions (W x D x H mm)                 | 1750 x 828 x 737    |             | 2435 x 828 x 737     |             |
| Total floor area (m <sup>2</sup> )        | 1.45                |             | 2.02                 |             |
| Weight (kg)                               | 135                 |             | 150                  |             |
| Door                                      | Solid               |             | Solid                |             |
| Electronic Controller                     | Yes                 |             | Yes                  |             |
| Remote duty (Watts @ SST)                 | N/A                 | 706 @ -10°C | N/A                  | 706 @ -10°C |
| Breathes from / Expels air to             | Front / Front       |             | Front / Front        |             |
| Sign                                      | No                  |             | No                   |             |
| Cabinet construction                      | Stainless steel     |             | Stainless steel      |             |
| Drainage (plumbing required)              | No                  | Yes         | No                   | Yes         |
| Locks as standard                         | Yes                 |             | Yes                  |             |
| Can be plinth mounted                     | Yes                 |             | Yes                  |             |
| Supplied with legs & castors              | Yes                 |             | Yes                  |             |
| <b>Internal</b>                           |                     |             |                      |             |
| Gross volume (litres)                     | 480                 |             | 750                  |             |
| Lighting                                  | N/A                 |             | N/A                  |             |
| Well capacity (150mm deep pans)           | 7 x 1-3 or 14 x 1-6 |             | 11 x 1-3 or 22 x 1-6 |             |
| No. of shelves (per door)                 | 2                   |             | 2                    |             |
| Shelf design                              | Plastic coated wire |             | Plastic coated wire  |             |
| Total shelf area (m <sup>2</sup> )        | 1.27                |             | 1.91                 |             |
| Coved floor                               | Yes                 |             | Yes                  |             |
| Internal material                         | Stainless steel     |             | Stainless steel      |             |
| <b>Performance</b>                        |                     |             |                      |             |
| Temperature range (adjustable up to 15°C) | 1°C to 5°C          |             | 1°C to 5°C           |             |
| Maximum ambient temperature               | 30°C                |             | 30°C                 |             |
| Climate Class rating                      | 4                   |             | 4                    |             |
| Refrigerant / Charge                      | R134a / 800g        | Specify     | R134a / 800g         | Specify     |
| <b>Electrical</b>                         |                     |             |                      |             |
| Electrical power (kW)                     | 0.82                | 0.11        | 0.85                 | 0.15        |
| Current draw (Amps)                       | 3.43                | 0.49        | 3.54                 | 0.61        |
| 10 Amp 3 pin plug                         | Yes                 |             | Yes                  |             |
| Light switch on controller                | No                  |             | No                   |             |

## Line Drawings

PG500 Prep

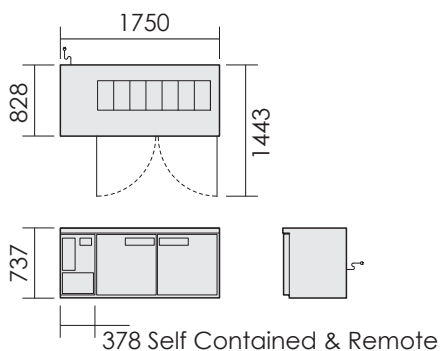

PG800 Prep

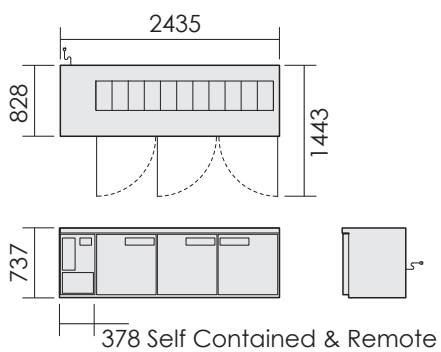

Cabinet height variation:

With supplied castors, add 95mm-120mm

With supplied adjustable legs, add 150mm-180mm

With optional plinth, add 34mm

The product information presented is for guideline purposes only. Always refer to the latest product specification sheet for accuracy and detail, and allow for dimensional tolerances (see glossary).