Pegasus Series 2/1 Underbench GN

Food Storage

Fridge

Gastronorm Storage

Part of our premium Pegasus series, these underbench fridges are built to last, using gastronorm configuration to fit standard food industry containers. Their exclusive front breathing system enables you to make the most of your space by installing your fridges flush against the walls.










PG200 PG500 PG800

Standard finish: Stainless steel
Standard models: 1, 2, & 3 solid door
Fridges shown with optional benchtop





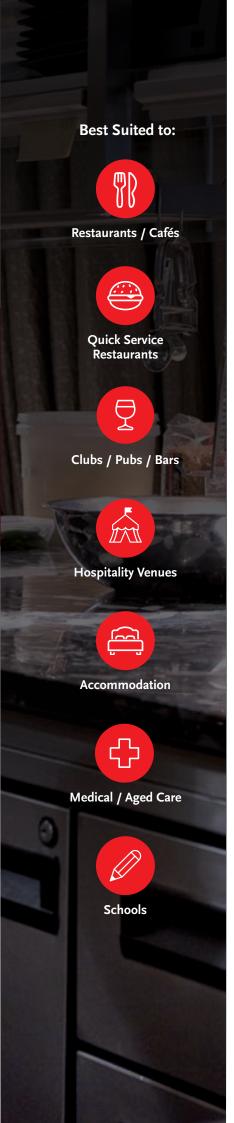

Quick Guide


Pegasus Series 2/1 Underbench GN			
Premium build quality	⊘		
Fridge or Freezer			
Gastronorm 2/1 (GN)	⊘		
Busy - heavy duty kitchens	⊘		
High ambient conditions	⊘		
SKOPE premium controller	②		
Remote available	⊘		
Customisable	⊘		
Standard Features	Benefits		
SKOPE premium controller	Easy to use with pre-programmed features		
Self closing, self sealing doors	Convenient & reliable		
Easy grip handle design	Comfortable and convenient access		
Front breathing refrigeration system	Built in design to save space		
Fan forced ducted airflow	Consistent temperature for food safety		
Heated fascia	Eliminates condensation		
Replaceable long life magnetic door gaskets	Reliable door seal for improved efficiency		
Key locks on all doors	Extra security		
Premium stainless steel exterior & interior	Very durable to clean and maintain		
Options			
 White or black powdercoat Full powdercoat colour range Remote 	 Double Low-E argon glass Tropical heated glass Extra shelf & slides/clips 		


- Remote
- R/H services
- 2 drawers per door
- 3 drawers per door
- 1 year extended warranty
- Extra shelf & slides/clips
- Stainless steel benchtop
- Plinth mounting
- Stainless steel punched shelves


Specifications	PG200		PG200		PG500		
Fridge/Freezer - doors	Fridge -	· 1 door	Freezer - 1 door		Fridge - 2 door Self Contained Remote		
Self Contained/Remote	Self Contained	-		Remote			
Model ID	PG200HC	PG200HCr	PG200HF	PG200HFr	PG500HC	PG500HC	
External							
Dimensions (W x D x H mm)	1065 x 828 x 685		1065 x 828 x 685		1750 x 828 x 685		
Total floor area (m²)	0.88		0.88		1.45		
Weight (kg)	120	105	132	108	135	120	
Door	Solid		Solid		Solid		
Electronic controller	Yes		Yes		Yes		
Remote duty (Watts @ SST)	N/A	447W @ -5°C	N/A	180W @ -30°C	N/A	534W @ -5	
Breathes from / Expels air to	Front / front	Front / Front	Front / Front		Front / Front		
Cabinet construction	Stainless steel		Stainless steel		Stainless steel		
Drainage (plumbing required)	No	Yes	No	Yes	No	Yes	
Locks as standard	Ye	es	Yes		Ye	Yes	
Can be plinth mounted	Yes		Yes		Yes		
Supplied with legs & castors	Ye	Yes		Yes		Yes	
Internal							
Gross volume (litres)	210		210		480		
Lighting	No	None		None		None	
No. of shelves (per door)	2		2		2		
Shelf design	Plastic coated wire		Plastic coated wire		Plastic coated wire		
Total shelf area (m²)	0.0	0.64		0.64		1.45	
Coved floor	Yes		Yes		Yes		
Internal material	Stainle	Stainless steel		Stainless steel		Stainless steel	
Performance							
Temperature range	1°C to 4°C		-18°C to -21°C		1°C to 4°C		
Maximum ambient temperature	43°C		43°C		43°C		
Refrigerant / charge	R134a/450g	Specify	R404A/750g	Specify	R134a/530g	Specify	
Electrical							
Electrical power (kW)	0.61	0.11	0.72	0.38	0.66	0.12	
Current draw (Amps)	2.54	0.47	3.00	1.60	2.75	0.49	
10 Amp 3 pin plug	Yes		Yes		Yes		
Light switch on controller	No		No		No		
Door operated light	No		No		No		

PG	PG500		PG8oo		
Freezer - 2 door		Fridge - 3 door			
Self Contained	Remote	Self Contained	Remote		
PG500HF	PG500HFr	PG8ooHC	PG8ooHCr		
1750 x 8	28 x 685	2435 x 828 x 685			
1	1.45		2.02		
147	123	150	135		
So	Solid		lid		
Y	Yes		es		
N/A	364W @ -30°C	N/A	599W @ -5°C		
Front	Front / Front		Front / Front		
Stainle	ss steel	Stainle	ss steel		
No	Yes	No	Yes		
Y	es	Y	es		
Y	es	Yı	es		
Y	es	Yes			
48	Во	750			
No	None		None		
:	2		2		
Plastic coated wire		Plastic coated wire			
1	1.45		91		
Yes		Yes			
Stainle	Stainless steel		Stainless steel		
-18°C t	-18°C to -21°C 1°C		to 4°C		
43°C		43°C			
R404A/850g	Specify	R134a/530g	Specify		
1.14	0.86	0.88	0.15		
4.75	3.60	3.67	0.61		
	4.73 3.00 Yes		Yes		
No		No			
N	No		No		
I .					

Line Drawings







Cabinet height variation:
With supplied castors, add 95mm-120mm
With supplied adjustable legs, add 150mm-180mm
With optional plinth, add 34mm
With optional benchtop, add 50mm

The product information presented is for guideline purposes only. Always refer to the latest product specification sheet for accuracy and detail, and allow for dimensional tolerances (see glossary).