

**CODICE**

BN27WG02121PO76

**MODELLO**

W25-04 TNN H710 S

REFRIGERATED TABLES




**A**

ENERGY CLASS

## SERIE WINDY

The temperature uniformity throughout the refrigerated compartment is secured by a patented ventilation system using air channelling, aided by the absence of the evaporator in the compartment.

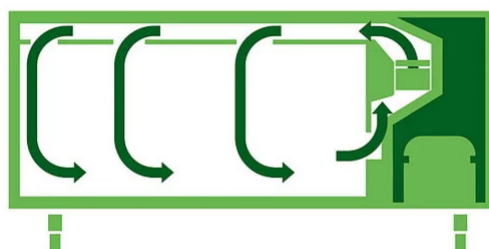

## TECHNICAL SPECIFICATIONS

Cell bottom printed with rounded corners and removable grid supports for the maximum degree of hygiene and load flexibility. Insulation thickness of 60 mm, made of high-density expanded polyurethane, completely free of CFC. Fully extractable drawers, thanks to special Fullterer telescopic guides in stainless steel. Self-closing door with 100° opening lock. Lower hinge fixed frontally for installation on the plinth.

Removable condensing unit.

### REFRIGERATION UNIT

Out-of-cell evaporator for greater loading convenience

Ducted ventilation system to even out internal temperature

Evaporators with treatment in cataphoresis

### CONTROLS, MONITORING, AND SAFETY FEATURES:

Electronic control board with HACCP function

Hot gas defrost system (onboard motor versions)

Electric defrost (on predisposed versions)

Automatic condensate evaporation device without the need for any electricity

Interior equipment: grid support frame and 4 plastic-coated GNI/I grids

**CODICE**

BN27WG02121PO76

**MODELLO**

W25-04 TNN H710 S

REFRIGERATED TABLES

**Technical Information**

| SPECIFICATION           | DATA                     |
|-------------------------|--------------------------|
| MATERIAL                | BN27WG02121PO76          |
| DIM. WIDTH              | 2190 mm                  |
| DIM. PRODUCTIVITY       | 690 mm                   |
| DIM. HEIGHT             | 860 mm                   |
| NET WEIGHT              | 117 Kg                   |
| PACKAGE LENGTH          | 750 mm                   |
| PACKAGE WIDTH           | 2240 mm                  |
| PACKAGING HEIGHT        | 970 mm                   |
| PACKAGE VOLUME          | 1.6296 m <sup>3</sup>    |
| GROSS PACKING WEIGHT    | 137 Kg                   |
| GAS/REFRIGERANT TYPE    | R290                     |
| ENERGY CLASS            | A                        |
| CLIMA CLASS             | 5                        |
| Capacity                | 372 l.                   |
| INSULATION THICKNESS    | 60 mm                    |
| GWP                     | 3                        |
| TEMPERATURE RANGE       | -2 / +8°C                |
| COMPRESSOR DISPLACEMENT | 6.92 cm <sup>3</sup>     |
| GAS QUANTITY            | 62 g.                    |
| NOISE LEVEL             | dB(A) < 70               |
| EVAPORATOR              | INTERNO IN CELLA         |
| IEE                     | 18.95                    |
| KW/24H                  | 1.38                     |
| NUMBER OF PANS          | 4                        |
| GRILL PITCH             | 115 mm                   |
| DEPTH WITH OPEN DOOR    | 1080 mm                  |
| DOOR OPEN DIMENSION     | 1440*570 mm              |
| USEFUL INTERNAL DEPTH   | 550 mm                   |
| FLOOR HEIGHT            | 150 mm                   |
| COMPARTMENTS            | 4                        |
| DOORS                   | 4                        |
| POWER SUPPLY            | 220-240 V ~ 50 Hz        |
| POWER CABLE             | mm <sup>2</sup> - 3G 1,5 |
| DEFROST HEATER          | 177                      |
| MAX STORAGE T.          | 60 °C                    |
| MIN STORAGE T.          | -40 °C                   |
| MIN. OPERATING PRESSURE | 0.2 bar                  |
| MAX. OPERATING PRESSURE | 30                       |


**CODICE**

BN27WG02121PO76

**MODELLO**

W25-04 TNN H710 S

REFRIGERATED TABLES

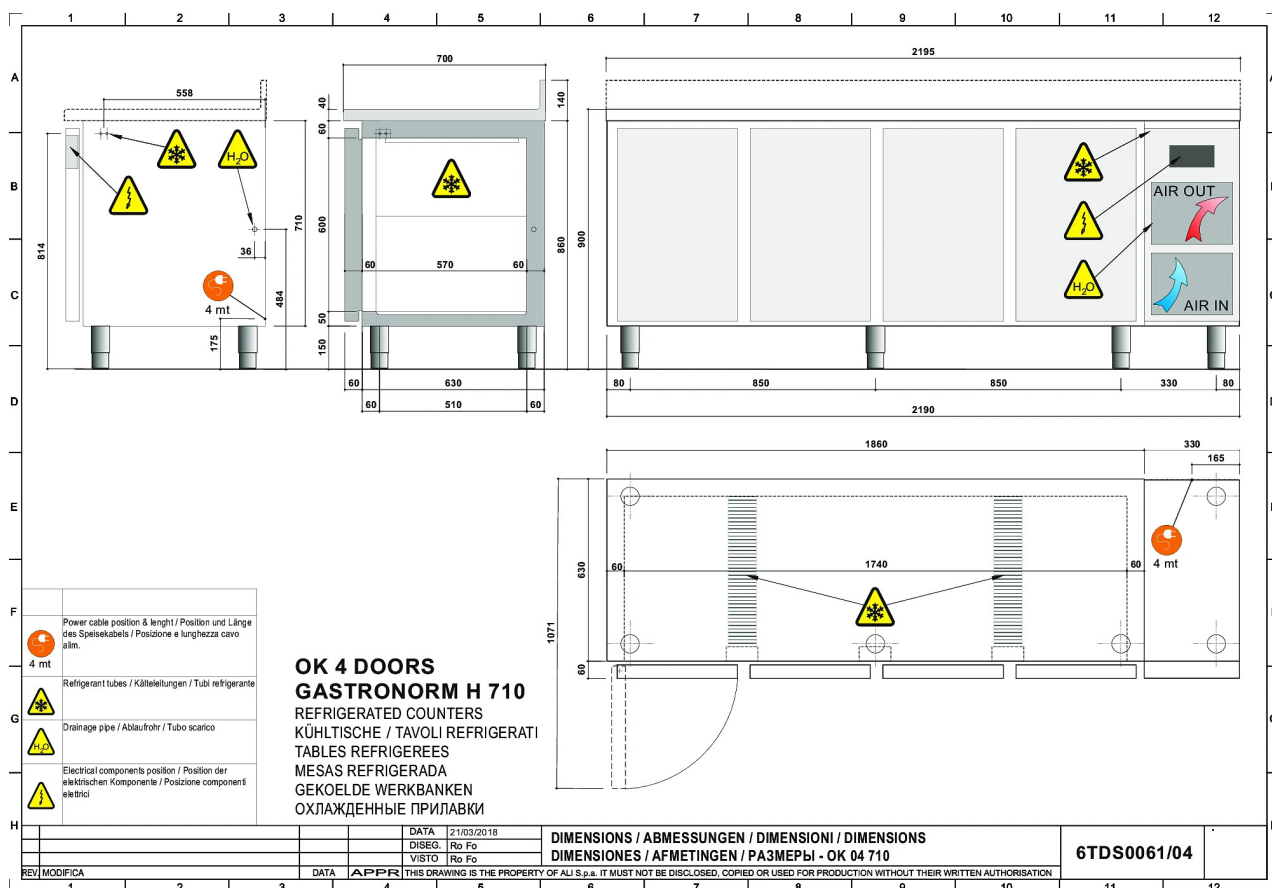

**CODICE**

BN27WG02121PO76

**MODELLO**

W25-04 TNN H710 S

REFRIGERATED TABLES


# Product's PLUS



Flush rack structure, with 5 positions, easily removable for cleaning.



Molded cell bottom with rounded edges and removable grid supports for maximum hygiene and loading flexibility.



Thanks to an innovative and user-friendly control system, temperature and operating parameters are easy to monitor and adjust.




Full extension drawers with special Fulterer stainless steel telescopic slides



The CFC-free, water-expanding polyurethane foam insulation of the tables has a thickness of 60 mm, enabling the tables to work optimally even at ambient temperatures of +40 °C.



The temperature uniformity throughout the refrigerated compartment is secured by a patented ventilation system using air channelling, aided by the absence of the evaporator in the compartment.



**CODICE**

BN27WG02121PO76

**MODELLO**

W25-04 TNN H710 S

REFRIGERATED TABLES

**OPTIONAL**

|                                                                                   | MODELLO            | DESCRIZIONE                                                |
|-----------------------------------------------------------------------------------|--------------------|------------------------------------------------------------|
|  | <b>CR13</b>        | Drawers kit 1/3 H (int)= 120 mm (int)= 120 mm (int) 170 mm |
|  | <b>CR21</b>        | Drawers 1/2 H (int)= 240 mm (int)= 240 mm                  |
|  | <b>KIT-IOT 4.0</b> | CONNECTIVITY 4.0 SUPREME SUPPLEMENT KIT                    |
|  | <b>OPCBAS</b>      |                                                            |

**CODICE****BN27WG02121PO76****MODELLO****W25-04 TNN H710 S****REFRIGERATED TABLES****ACCESSORIES**

| CODE     | MODELLO   | DESCRIZIONE                                                                  |
|----------|-----------|------------------------------------------------------------------------------|
| 1290030  | P40 2190  | Top for 4 compartments 2190 x 700 mm Thickness 40 mm                         |
| 1290070  | PA40 2190 | Top with backguard for 4 compartments 2190 x 700 mm Thickness 40 mm + 100 mm |
| 21657278 | UMC TNN   | TNN REMOTE UNIT SETUP                                                        |
| 219916   | RT        | Kit castors S18-03 H 158mm / ø 125                                           |