

TECHNICAL DATA SHEET FOR

ROTEL BAKERY OVENS

AUR33D3S, AUR34DHC AND AUR34D1S

STANDARD FEATURES

VTL - variable temperature loading

- energy efficient
- ease of operation
- less down time

Live inbuilt steaming system fitted to all chambers

Interior lamps fitted standard to all chambers.

Each chamber individually controlled

Touch screen controllers centrally mounted

OVERALL CONSTRUCTION

Internal baking chambers stainless steel

Facia and sides stainless steel

Doors all stainless steel construction

Tempered 10mm thick door glass

Tray holders welded steel and fitted standard to all decks

Turntable drive system bottom mounted

Casters fitted as standard

OPERATION

Touch screen controllers that operate with minimal staff input

Individual chamber control display

Icon category menu

Up to 99 baking programs (universal programming for all decks)

Programmable time, temp, steam and top/bottom heat balance

Automatic preheating of all decks

Automatic energy saving temperature set-back / idle

Split bake / multiple product program feature applied all decks

Manual bake mode

7 day auto-start

Low-temp bake mode


Automatic back up on event of controller failure

Temperature control range up to 270°C


Bake time range 0-120 minutes standard (adjustable to 256 minutes)




AUR34D1S

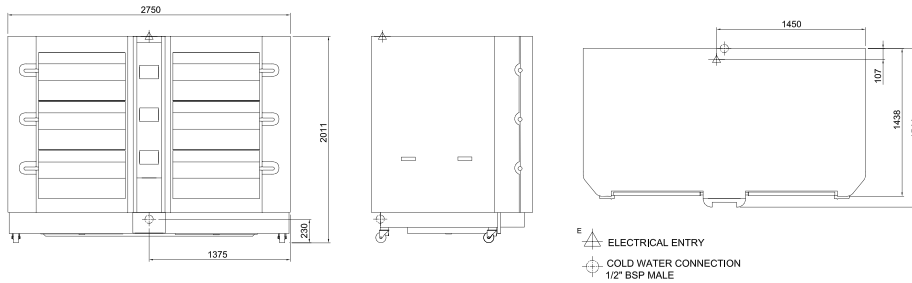

AUR33D3S

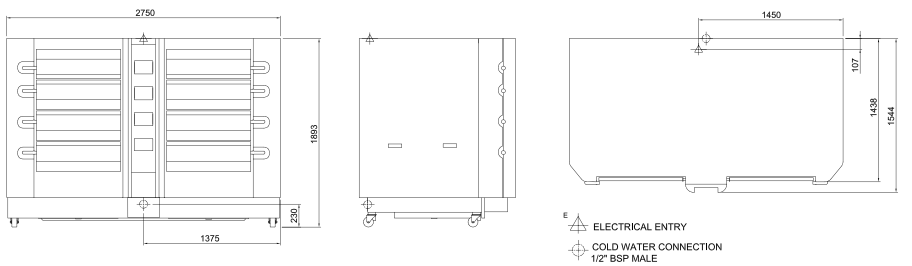

AUR34DHC

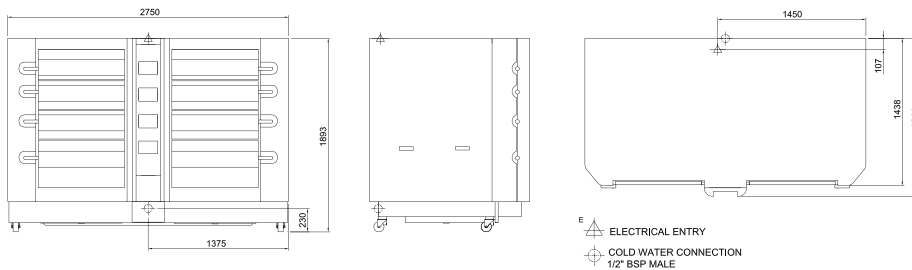

AUR34D1S

Model	Deck Configuration	Tray ¹ Capacity	Loaf ² Capacity	Dimensions W x D x H mm	Electrical Specifications
AUR33D3S	3 deck, 3 split	24 tray	120	2750 x 1528 x 2011	68kW, 3P+N+E, 400-415v, 50hz
AUR34D1S	4 deck, 1 split	20 tray	120	2750 x 1528 x 1893	58kW, 3P+N+E, 400-415v, 50hz
AUR34DHC	4 deck, high crown	16 tray	96	2750 x 1528 x 1893	48kW, 3P+N+E, 400-415v, 50hz

¹ Oven chambers accept 16" and 18" wide trays

² Standard 680gm loaf

Crown heights (usable)

Standard decks	- 180mm (unless top deck)
Top decks	- 200mm (unless split deck)
Split decks	- 170mm (unless top split deck)
Top Split decks	- 205mm / 135mm (offset split)

Model	AUR33D3S	AUR34D1S	AUR34DHC
Nett Weight	1600 kg	1600 kg	1600 kg
Packing Data			
Weight	1760 kg	1760 kg	1760 kg
Width	3090 mm	3090 mm	3090 mm
Depth	1900 mm	1900 mm	1900 mm
Height	2350 mm	2350 mm	2350 mm
Volume	13.8 m3	13.8 m3	13.8 m3

MOFFAT®

Australia

Moffat Pty Limited

Victoria/Tasmania

740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au

New South Wales

Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia

Telephone 03-9518 3888
vsales@moffat.com.au

Queensland

Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia

Telephone 08-9413 2400
wasales@moffat.com.au

New Zealand

Moffat Pty Limited

Rolleston

45 Illinois Drive
Izone Business Hub
Rolleston 7675
Telephone 03-389 660
Facsimile 03-389 6660
sales@moffat.co.nz

Auckland

Telephone 09-574 3150
sales@moffat.co.nz

Important Notice:

This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



ISO9001
Quality
Management
Standard



In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

