

Project: _____ Item: _____



DLGBJ4N-C14D6


Standard Features:

- AISI grade stainless steel
- Heavy duty complete stainless steel frame
- 2.4kW Infrared cook zones with integrated high-performance wire plates
- One-piece machine pressed top surface - 1.5mm Thick
- Seamless microcrystalline glass plates - 300mm W x 300mm D x 6mm T
- Circular heating sections measuring 200mm Dia
- Heavy duty drop down door with spring hinge system
- 50°C - 300°C Thermostatic oven rotary controls with indicators
- Internal Oven Dimensions: 540mm D x 525mm W x 200mm H
- GN 1/1 Capacity with 3 position racking
- Infinitely variable power control knob to adjust heating levels
- Intuitive IPX5 rated display illustrates output power, cumulative energy consumption, malfunction codes and allows menu programming
- Rotary control knob with red and green operation indicators
- Internal cooling fans conserve working temperatures of all electronics
- Front access to all components makes service easy

Options:

- SCCP - Colored Control Panel
- SCCS - Non-swivel rear castors - Set of two
- SCPK - Plinth Kit

Specifications:

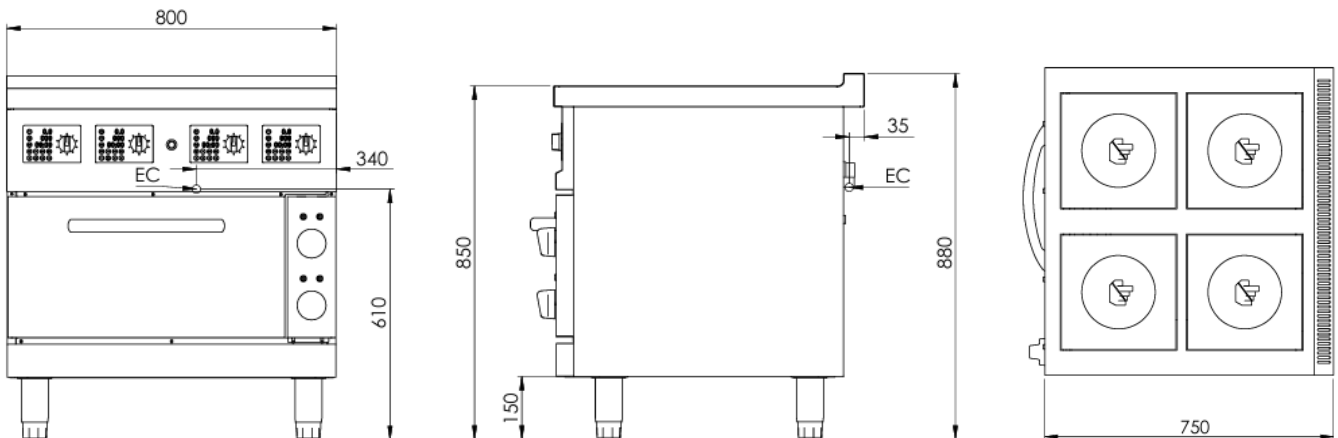

MODEL	LENGTH (mm)	DEPTH (mm)	HEIGHT (mm)	NET WEIGHT (kg)
DLGBJ4N-C14D6	800	750	880	110

Connections:

ELECTRICAL CONNECTION (EC)	ELECTRICAL SUPPLY REQUIREMENTS				
	VOLTAGE (V)	TYPE	FREQUENCY (Hz)	POWER (kW)	L1, L2, L3 AMPS (A)
Hard Wired	415	3P+E	50/60	2.4*4 (BT) + 5 (OV)	25

- **Must** be installed by an authorised installer in accordance to **AS/NZS 3000** refer to current publications

Due to ongoing Product Development, Product Improvement and Research, B+S Commercial Kitchens reserves the right to alter specifications and the design of the product without notice.

Electromagnetic Compatibility: AS/NZS CISPR 14.1