

Project: _____ Item: _____



DLPP12N-C13D5


Standard Features:

- AISI grade stainless steel
- Heavy duty complete stainless steel cabinet frame
- High-performance sectional heating elements distribute heat evenly
- One-piece machine pressed top surface - 2mm Thick
- Heavy duty 20mm thick frosted multi-layered smooth steel plate
- Griddle plate cooking area - 1080mm W x 440mm D
- Rotary control knobs to adjust desired temperature setting
- Red and green operation indicators
- Temperature range: 80°C - 300°C (± 5°C Accuracy)
- Over-temperature safety cut-out protection device with manual reset
- Internal cooling fans conserve working temperatures of all electronics
- Removable pull-out grease collection tray for ease of cleaning
- Front access to all components makes service easy

Options:

- SCCP - Colored Control Panel
- SCCS - Non-swivel rear castors - Set of two
- SCPK - Plinth Kit

Specifications:

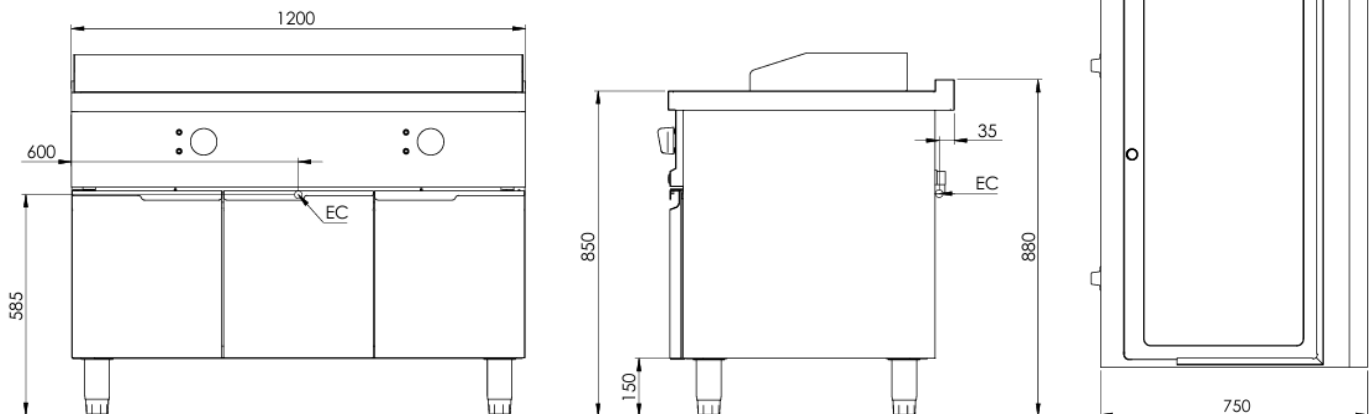

MODEL	LENGTH (mm)	DEPTH (mm)	HEIGHT (mm)	NET WEIGHT (kg)
DLPP12N-C13D5	1200	750	880	155

Connections:

ELECTRICAL CONNECTION (EC)	ELECTRICAL SUPPLY REQUIREMENTS				
	VOLTAGE (V)	TYPE	FREQUENCY (Hz)	POWER (kW)	L1, L2, L3 AMPS (A)
Hard Wired	415	3P+E	50/60	13.5	20

- **Must** be installed by an authorised installer in accordance to **AS/NZS 3000** refer to current publications

Due to ongoing Product Development, Product Improvement and Research, B+S Commercial Kitchens reserves the right to alter specifications and the design of the product without notice.

Electromagnetic Compatibility: AS/NZS CISPR 14.1