

Project: _____ Item: _____



DLZMDN6-C12




Standard Features:

- AISI grade stainless steel
- Heavy duty complete stainless steel cabinet frame
- 316 Stainless steel constructed tank - 2mm Thick
- In-built water overflow helps remove water impurities
- Direct basket heating elements provide precise heat dispersion
- Built-in thermal insulation layer saves energy and improves efficiency
- Temperature range: 0°C - 100°C
- 28L water capacity
- Manually operated water spindle to control integrated tank faucet
- False base provides direct burst boiling to each individual basket
- Rotary control knob to adjust desired temperature setting
- Red and green operation indicators
- Noodle baskets provided
- Tank dimensions: 490mm D x 315mm W x 165mm H (Height is measured from the base to the top of the tank)

Options:

- SCCP - Colored Control Panel
- SCCS - Non-swivel rear castors - Set of two
- SCPK - Plinth Kit

Specifications:

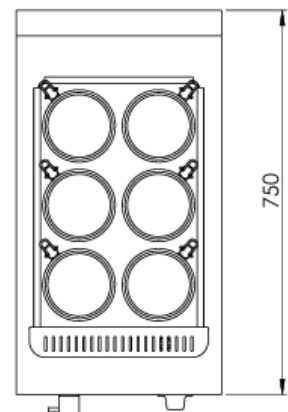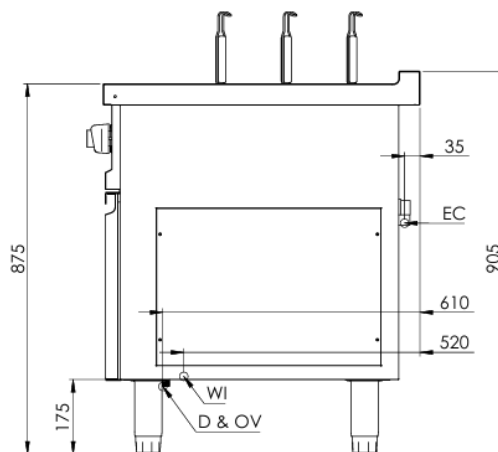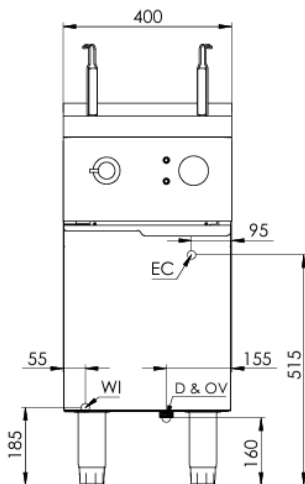

MODEL	LENGTH (mm)	DEPTH (mm)	HEIGHT (mm)	NET WEIGHT (kg)
DLZMDN6-C12	400	750	905	50

Connections:

ELECTRICAL CONNECTION (EC)	WATER (WI) (BSP)	TANK DRAIN (D) OVERFLOW (OV)	ELECTRICAL SUPPLY REQUIREMENTS				
			VOLTAGE (V)	TYPE	FREQUENCY (Hz)	POWER (kW)	L1, L2, L3 AMPS (A)
Hard Wired or Plug and Lead	½" (M)	1" (F)	415	3P+N+E	50/60	12	18

- **Must** be installed by an authorised installer in accordance to **AS/NZS 3000** refer to **current version**

Due to ongoing Product Development, Product Improvement and Research, B+S Commercial Kitchens reserves the right to alter specifications and the design of the product without notice.

Electromagnetic Compatibility: AS/NZS CISPR 14.1