

Project: _____ Item: _____



HLTLD-C12


Standard Features:

- AISI grade stainless steel
- Heavy duty complete stainless steel cabinet frame
- One-piece machine pressed top deck - 1.2mm thick
- Seamless microcrystalline glass plate - 430mm diameter
- Full coverage base coil to ensure even heating dispersion and efficiency
- Built-in thermal insulation layer saves energy and improves efficiency
- 5 Stage magnetic slide control to adjust heating levels
- Intuitive IPX5 rated display illustrates output power, cumulative energy consumption, malfunction codes and allows menu programming
- Manually operated laundry arm and spindle
- Front access to all components makes service easy
- Stock pot with release valve - 170 L (600mm Dia x 600mm H)

Options:

- SCCS - Non-swivel rear castors - Set of two
- SCPK - Plinth Kit

Specifications:

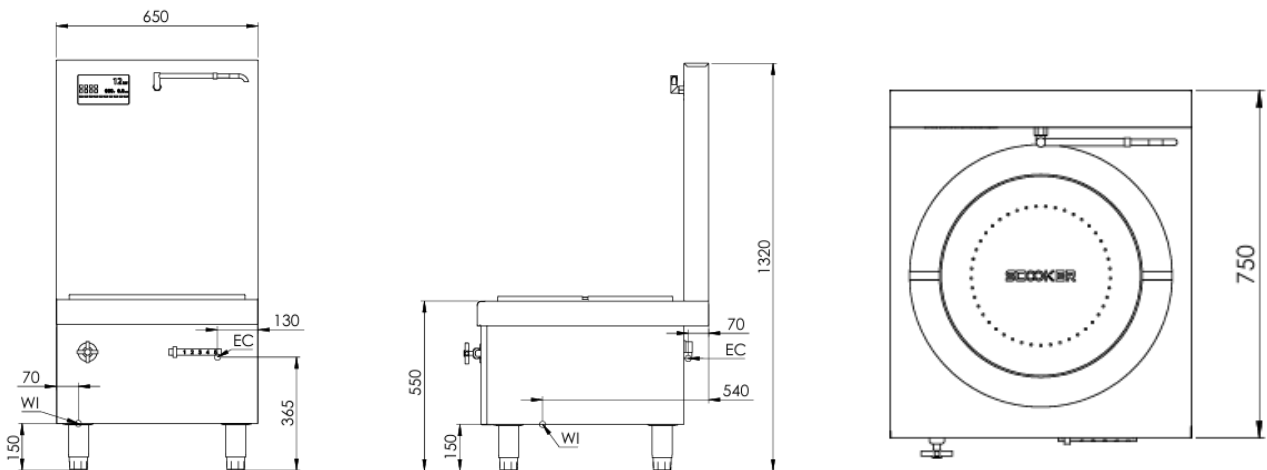

MODEL	LENGTH (mm)	DEPTH (mm)	HEIGHT (mm)	NET WEIGHT (kg)
HLTLD-C12	650	750	1320	60

Connections:

ELECTRICAL CONNECTION (EC)	WATER (WI) (BSP)	ELECTRICAL SUPPLY REQUIREMENTS				
		VOLTAGE (V)	TYPE	FREQUENCY (Hz)	POWER (kW)	L1, L2, L3 AMPS (A)
Hard Wired	½" (M)	415	3P+E	50/60	12	18

- **Must** be installed by an authorised installer in accordance to **AS/NZS 3000** refer to current publications

Due to ongoing Product Development, Product Improvement and Research, B+S Commercial Kitchens reserves the right to alter specifications and the design of the product without notice.

Electromagnetic Compatibility: AS/NZS CISPR 14.1