

## Two Solid Swing Door BackBar

Range: BackBar

SKOPE ID: BB002

Dimensions: 1480 mm (W) × 590 mm (D) × 1025 mm (H)\*

Capacity: 410 L

\* Height with castors is adjustable from 1015 to 1030.

Project: \_\_\_\_\_

Item #: \_\_\_\_\_



A solid door under-bar fridge designed to merchandise ready-to-serve cold beverages and food in bars, restaurants, clubs, pubs, and cafés. With M1 compliance it is engineered to serve cold food and drinks at 1°C to 4°C (or adjustable up to 15°C) in ambient environments of up to 40°C. Made from powder-coated, galvanised steel with colour options, it can also be upgraded to full stainless-steel construction. The doors and cabinet are fitted with built-in retractable tabs to enable locking via padlock. The fridge uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge and low noise output and can be provided in remote versions. The side-mounted fully removable refrigeration cartridge (with left and right options) is front-breathing and can be removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to a free app to enable the user to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty




Natural Refrigerant



GEMS



SKOPE-connect

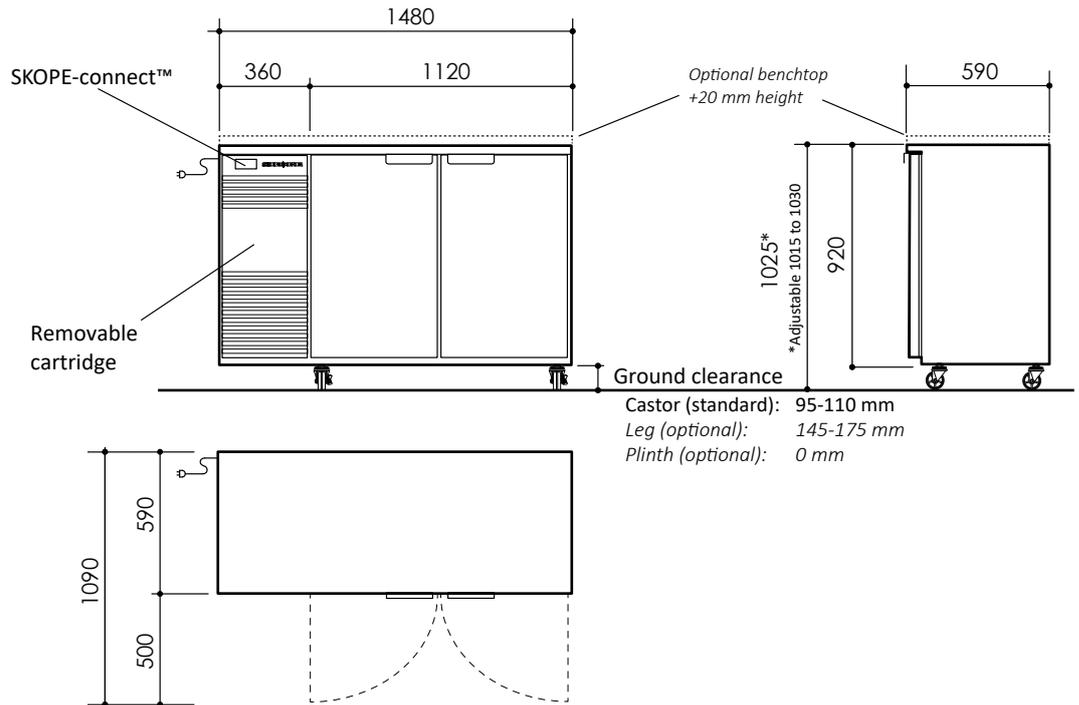

### Cabinet

<b>Type</b>	BackBar
<b>Finish</b>	Powdercoated galvanised steel or stainless steel
<b>Insulation</b>	Type PU foam
	Thickness (mm) 50
	Blowing Agent Cyclo-iso Pentane (C5H10/C5H12)
<b>Doors</b>	Type Solid swing door (self-closing, foamed, lockable)
	Opening Size Height (mm) 730 Width (mm) 460
<b>Shelving</b>	Four adjustable height, plastic-coated wire shelves 4 × outer shelf (497W × 440L)
<b>Lighting*</b>	1 × 16 W dimmable, cool white (5500-6500K) LED strip on cabinet ceiling

### Dimensions†

	External	Internal	Packed
<b>Width (mm)</b>	1480	1020	TBC
<b>Depth (mm)</b>	590	530	TBC
<b>Height (mm)</b>	1025 (std. castors)	758	TBC
	920 (plinth mount)		
<b>Weight (kg)</b>	180		TBC
<b>Capacity (L)</b>	410		
<b>Footprint (m<sup>2</sup>)</b>	0.87		

### Ventilation (mm)

Top	Sides	Rear
Not required	Not required	Not required

### Product Loading

Facing	330 ml can	28	600 ml bottle	28
<b>Loading</b>	330 ml can	168	600 ml bottle	168

\* Accessible via the free SKOPE-connect™ app.

† Allow for dimensional tolerances when installing the cabinet(s).

### Performance

<b>Product Temperature Range (°C)</b>	1 to 4 (adjustable* from 0 to 15)	
<b>Rated Ambient Temperature</b>	40°C/40% relative humidity	
<b>Maximum Ambient Temperature (°C)</b>	40	
<b>Sound Level (dB(A))</b>	Standard	Less than 66
	Hush Mode*	Less than 62
<b>Greenhouse and Energy Minimum Standards (GEMS)</b>		
<b>Star Rating</b>	6	
<b>Product Temperature Class</b>	M1 (-1 to 5°C)	
<b>Total Energy Consumption</b>	1.87 kW h/24 h	
<b>Annual Running Costs</b>	\$205 (@ \$0.30/kW h)	

### Electrical

<b>Supply</b>	220-240 volts a.c., 50 Hz, single phase supply
<b>Cord</b>	1.9 m power cord with 3-pin, 10 amp plug
<b>Current draw (A)</b>	1.7

### Refrigeration

<b>Controller</b>	SCS Connect (SKOPE-connect™ compatible)		
<b>System Type</b>	Removable cartridge		
<b>Cartridge Weight (kg)</b>	24		
<b>Refrigerant/Charge</b>	R290/81 g		
<b>Nominal Capacity (W)</b>	650		
<b>Heat Rejection (W)</b>	Average	80	Peak 90
<b>Remote Duty</b>	n.a.		
<b>Defrost Type</b>	Off-cycle		
<b>Drainage</b>	No plumbing required		



BB.2.SSW  
on the SKOPE website