

specifications


GC110r

SKOPE Remote Glass Chiller

CABINET DIMENSIONS


	External	Internal
Height:	725mm *	660mm
Width:	750mm	370mm
Depth:	600mm	455mm
Opening:	480 wide x 455 deep	
Floor area:	0.45m ²	

* Height excludes adjustable legs.

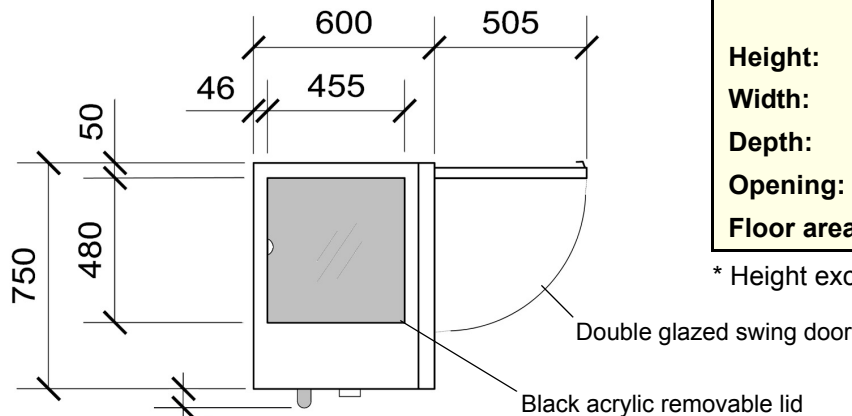

**INDUSTRY
KITCHENS**

www.industrykitchens.com.au 1800 611 058

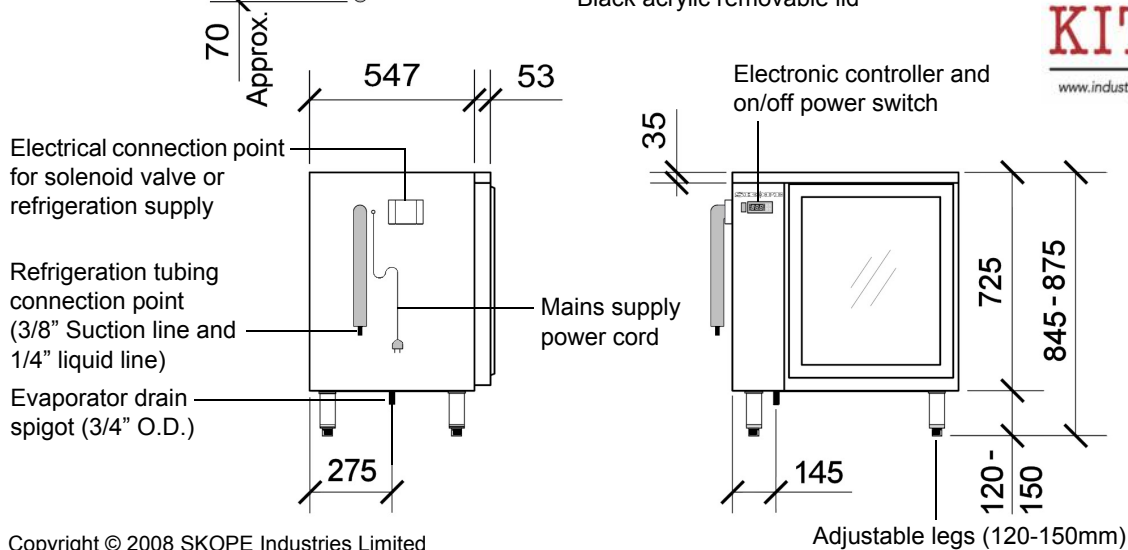

Copyright © 2008 SKOPE Industries Limited

CABINET SPECIFICATIONS

Refrigeration system:	Remote refrigeration unit (LH service) - not supplied.
Refrigerant:	Thermostatic expansion valve dedicated to either R134a or R404A.
Pipe connection size:	Liquid line: 1/4". Suction line: 3/8"
Remote refrigeration duty:	450 Watts (at -5°C SST) required.
Cabinet internal volume:	110 litres
Insulation:	50mm polyurethane foam.
Classification:	Climate Class: 5 (40°C). Product Class: M2
Drainage:	3/4" (19mm) O.D. evaporator drain spigot fitted (requires plumbing).
Electrical supply:	220-240 Volts a.c. 50 Hz, 0.37 Amps
Controls:	Carel ir33 electronic controller and on/off power switch with neon indicator.
Power cord:	3.0 metre flexible power cord fitted with 3-pin plug.
Door:	Self-closing, double-glazed Low E, argon filled, toughened clear safety glass. RH hinged (LH hinge kit available).
Shelves:	Three shelf runners, to take 14" (355mm) wide x 17" (432mm) deep glass racks (racks not supplied).
Total weight:	55 kg

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0080 Rev. 4.1 Apr. 2016



SKOPE INDUSTRIES LIMITED



New Zealand Freephone: 0800 947 5673, Fax: (03) 983 3896. Australian Freephone: 1800 121 535, Freefax: 1800 121 533

Email: enquiry@skope.co.nz Website: www.skope.co.nz