

# specifications

## PG21.UPR.1.SD


ProSpec Series, 1 Solid Door Upright Fridge

Project: \_\_\_\_\_

Item No: \_\_\_\_\_

**INDUSTRY  
KITCHENS**

www.industrykitchens.com.au 1800 611 058

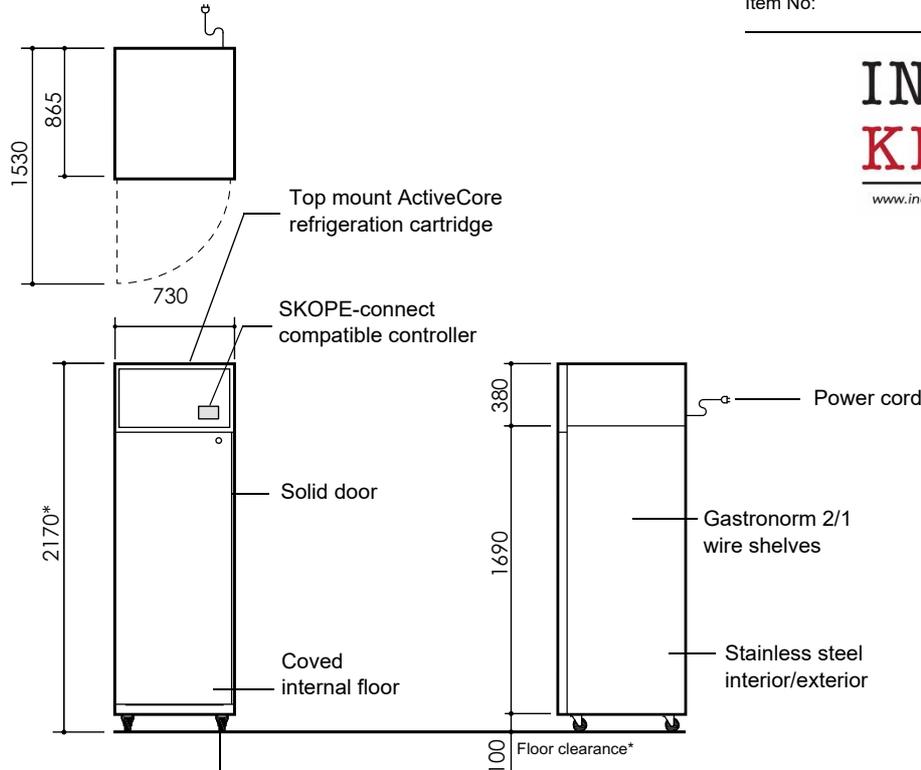

Supplied with removable castors (Ø75 mm wheel).  
Optional height-adjustable legs available.

CABINET	
Doors	1 × self-closing, lockable, solid swing door with stay-open position at over 90°
Internal door opening	1 × door opening: 1500 mm high × 540 mm wide
Shelves	5 × stainless steel GN 2/1 shelves: 530 mm wide × 650 mm deep
Worktop	n.a.
Material	304 AISI stainless steel interior and exterior on all faces
PERFORMANCE	
Max. ambient temperature	40°C
Temperature range	1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)
GEMS class	5M1
GEMS energy consumption	2.20 kWh/24 h
GEMS annual running cost	\$241 p.a. (@ \$0.30/kWh)
ELECTRICAL	
Electrical safety climate class	5
Interior lighting	1 × 1400 mm, 16 W LED light (door-activated)
Power cord	Supplied with 2.3 m, 10 amp plug and lead
Power supply	220–240 volts a.c. 50 Hz, single phase supply
Current draw	3.0 amps (unit 2.6 amps)
REFRIGERATION	
Controller	SCS Connect (SKOPE-connect compatible)
Connectivity interface	Bluetooth wireless technology
Refrigeration system	Top-mounted, integral, removable ActiveCore refrigeration unit (part number UTHCNI-0010)
Refrigerant	R290/99 g (natural refrigerant)
Nominal capacity	740 watts
Heat rejection (average/peak)	90 watts/140 watts
Drainage	No plumbing required

DIMENSIONS		
	External	Internal
Height	2170 mm*	1500 mm
Width	730 mm	565 mm
Depth	865 mm	675 mm
Floor area	0.63 m <sup>2</sup>	
Weight	150 kg	
Gross volume	572 L	
Net volume	480 L	

\* With supplied castors fitted. See height variation below

Height variation	
Supplied castors	2170 mm
Optional height adjustable legs	2220 to 2250 mm
No castors	2070 mm

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5 mm	
More than 1 metre	-5 mm to +10 mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	+15 mm

Ventilation requirements	
Top	300 mm
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

PSS0595 Rev. 1.4 Mar. 2025

### SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673, International: +64 3 983 3800  
Email: skope@skope.com, Website: www.skope.com

