


# specifications

## PG21.UPR.2.SD

ProSpec Series, 2 Solid Door Upright Fridge

Project: \_\_\_\_\_

Item No: \_\_\_\_\_

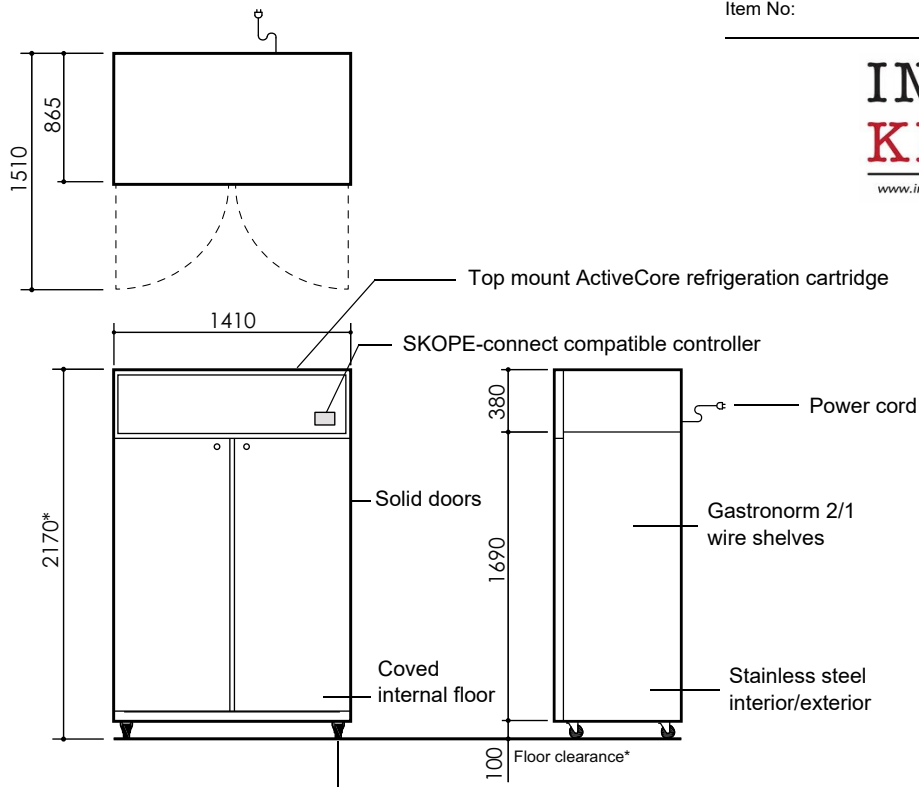

Supplied with removable castors (Ø75 mm wheel).  
Optional height adjustable legs available.

**INDUSTRY  
KITCHENS**

www.industrykitchens.com.au 1800 611 058

### CABINET

Doors	2 × self-closing, lockable, solid swing doors with stay-open position at over 90°
Internal door opening	2 × door openings: 1500 mm high × 540 mm wide
Shelves	10 × stainless steel GN 2/1 shelves: 530 mm wide × 650 mm deep
Worktop	n.a.
Material	304 AISI stainless steel interior and exterior on all faces

### PERFORMANCE

Max. ambient temperature	40°C
Temperature range	1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)
GEMS class	5M1
GEMS energy consumption	3.91 kWh/24 h
GEMS annual running cost	\$428 p.a. (@ \$0.30/kWh)

### ELECTRICAL

Electrical safety climate class	5
Interior lighting	2 × 1400 mm, 16 W LED light (door-activated)
Power cord	Supplied with 2.3 m, 10 amp plug and lead
Power supply	220–240 volts a.c. 50 Hz, single phase supply
Current draw	3.0 amps (unit 2.6 amps)

### REFRIGERATION

Controller	SCS Connect (SKOPE-connect compatible)
Connectivity interface	Bluetooth wireless technology
Refrigeration system	Top-mounted, integral, removable ActiveCore refrigeration unit (part number UTHCNI-0010)
Refrigerant	R290/99 g (natural refrigerant)
Nominal capacity	740 watts
Heat rejection (average/peak)	165 watts/225 watts
Drainage	No plumbing required

### DIMENSIONS

	External	Internal
Height	2170 mm*	1500 mm
Width	1410 mm	1250 mm
Depth	865 mm	675 mm
Floor area	1.21 m <sup>2</sup>	
Weight	230 kg	
Gross volume	1,266 L	
Net volume	960 L	

\* With supplied castors fitted. See height variation below.

Height variation	
Supplied castors	2170 mm
Optional height adjustable legs	2220 to 2250 mm
No castors	2070 mm

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5 mm	
More than 1 metre	-5 mm to +10 mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	+15 mm

Ventilation requirements	
Top	300 mm
Sids	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

PSS0596 Rev. 1.3 Mar. 2025

### SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673, International: +64 3 983 3800  
Email: skope@skope.com, Website: www.skope.com

