
specifications







ReFlex Series, 2 Door (Solid), Small Salad Preparation Fridge

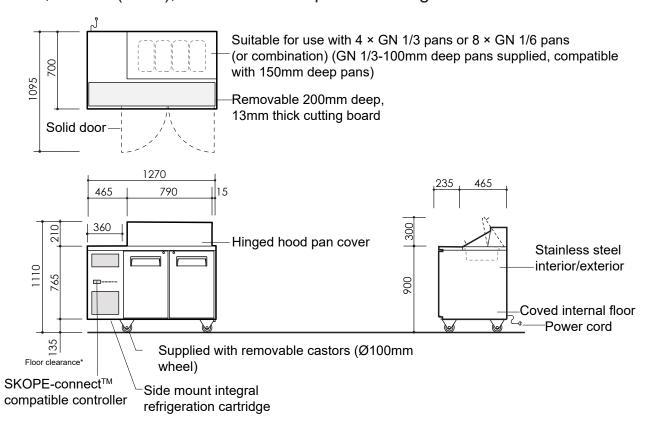

C	Δ	R	ı	N	F	Т
$\mathbf{\mathcal{I}}$	$\boldsymbol{-}$	_		ıv	_	

Doors 2 × self-closing, lockable, solid swing door with stay-open position at over

90°, hinged LH, RH.

Internal door opening 2 × door openings: 590mm high × 350mm wide

Shelves 4 × adjustable height shelves: 390mm wide × 510mm deep. Each shelf is

held in place with four shelf clips, and additional shelf clips available on

request.

Worktop Removable, food grade, 13mm plastic cutting board

Material 304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp. 40°C (lid(s) closed), or 30°C (lid(s) open)

Temperature range 1°C to 5°C (adjustable with SKOPE-connect 0°C to 15°C)

Total energy consumption 2.67 kWh/24h (@ 30°C/55%RH)

Annual running cost \$292 p.a. (@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class 5 (40°C/40% RH)

Interior lighting 1 × 400mm, 4W LED light (door activated)

Power cord Supplied with 2.7m, 10 Amp plug and lead

Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 2.0 Amps (includes unit 1.0 Amps)

REFRIGERATION

Controller SCS Connect (SKOPE-connect compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Side mounted, integral, removable refrigeration cartridge (part number

ULQCNI-0029)

Refrigerant R290/90g (natural refrigerant)

Nominal capacity 600 Watts

Heat rejection (Avg/peak) 110 Watts/120 Watts
Drainage No plumbing required

DIMENSIONS			
	External	Internal	
Height	1110mm	490mm	
Width	1270mm	820mm	
Depth	700mm	540mm	
Floor area	0.89m²		
Weight	139kg		
Gross volume	217L		

Height variation	
Supplied castors	1110mm
Supplied height adjustable legs	n.a.
No castors	975mm

Dimensional tolerances			
Before installing this cabinet allow the following dimensional tolerances:			
Linear dimensions	Cabinet overall dimensions		
Less than 1 metre	±5mm		
More than 1 metre	-5mm to +10mm		
	Length of multiple cabinets		
	At each joint	At each end	
Less than 1 metre	±5mm	+15mm	
More than 1 metre	-5mm to +10mm	+15mm	

Ventilation requirements		
Тор	Not required	
Sides	Not required	
Back	Not required	
Bottom	Not required	

PSS0666 Rev. 1.4 Mar. 2021



SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright @ 2020

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com