

specifications


SKB900N-A Series

ActiveCore Series, 2 Door (Glass), Upright Fridge

Project: _____

Item No: _____

**INDUSTRY
KITCHENS**
www.industrykitchens.com.au 1800 611 058

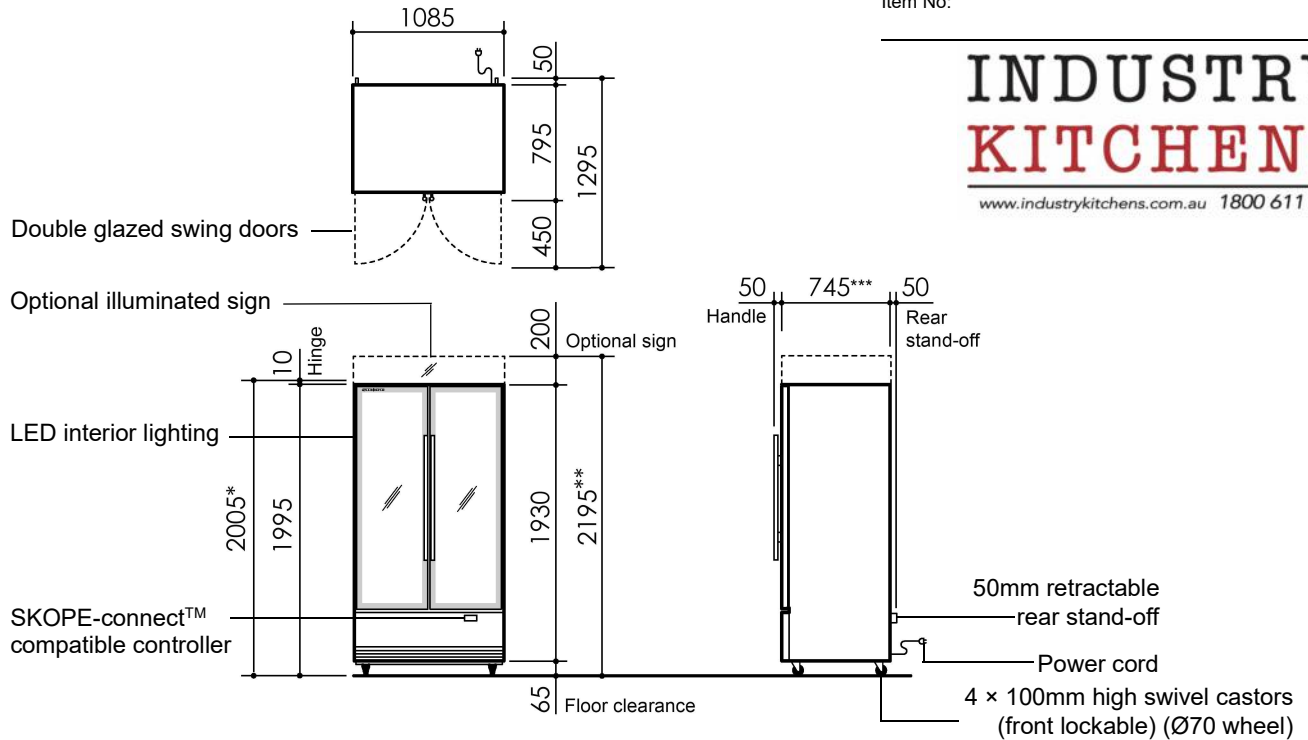

CABINET

Model ID	SKB900N-A	SKB900N-AC	SKB900N-ACX
Doors	2 × self-closing, double glazed, single Low-E, lockable, argon filled, toughened safety glass swing door (hinged LH, RH)		
Internal door opening	2 × door openings: 1454mm high × TBCmm wide		
Shelves	8 × wire and 2 × stainless steel	10 × wire and 2 × stainless steel	10 × wire and 2 × stainless steel
	Wire shelves: Adjustable height, 480mm wide × 520mm deep		
	Stainless steel bottom shelf: Not adjustable, 485mm wide × 515mm deep		
Sign	n.a.	Illuminated sign	Illuminated sign
Material	Powdercoat galvanized steel or stainless steel interior & exterior		

PERFORMANCE

Max. ambient temp.	40°C		
Temperature range	1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)		
GEMS class	M1		
GEMS energy consumption	3.46kWh/24h	3.64 kWh/24h	4.05 kWh/24h
GEMS annual running cost	\$379 p.a.(@ \$0.30/kWh)	\$399 p.a.(@ \$0.30/kWh)	\$444 p.a.(@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class	5		
Interior side lighting	2 × 1370mm, 15W LED	2 × 1370mm, 15W LED	n.a.
Interior shelf lighting	n.a.	n.a.	10 × 415mm, 6W LED
Sign lighting	n.a.	1 × 1035mm, 12W LED	1 × 1035mm, 12W LED
Power cord	Supplied with 2.0m, 10 Amp plug and lead		
Power supply	220-240 Volts a.c. 50 Hz, single phase supply		
Current draw	3.0 Amps (includes unit 2.6 Amps)		

REFRIGERATION

Controller	SCS Connect (SKOPE-connect™ compatible)		
Connectivity interface	Bluetooth® wireless technology		
Refrigeration system	Bottom mounted, integral, removable ActiveCore refrigeration unit (UBHCNI-0008)		
Refrigerant	R290 / 99g (natural refrigerant)		
Nominal capacity	740 Watts		
Heat rejection (Avg/peak)	145 Watts/185 Watts	150 Watts/195 Watts	170 Watts/240 Watts
Drainage	No plumbing required		

DIMENSIONS

	External	Internal
Height	2005mm* / 2195mm**	1454mm
Width	1085mm	985mm
Depth	795mm	602mm
Floor area	0.86m ²	
Weight	220kg	
Gross volume	880L	

* Height 2005mm without sign (SKB900-A)

** Height 2195mm with sign (SKB900-AC, SKB900-ACX)

*** Depth 745mm excludes removable door handle, door lock bracket and rear stand-off

Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements

Top	50mm
Sides	Not required
Back	50mm
Bottom	50mm

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2018 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

PSS0572 Rev. 2.1 Aug. 2020