


## Three Glass Swing Door SlimLine

**Range:** BackBar  
**SKOPE ID:** SLO03  
**Dimensions:** 2190mm (W) × 590mm (D) × 830mm (H)\*  
**Capacity:** 448L

**Project:** \_\_\_\_\_

**Item #:** \_\_\_\_\_

\* Height with castors is adjustable from 820 to 835.

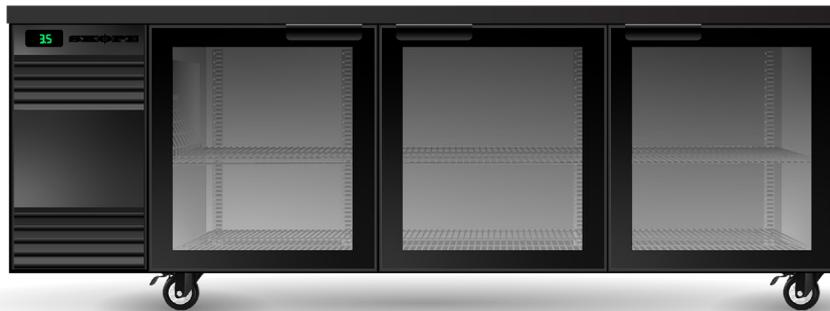

A glass door under-counter bar fridge designed to merchandise ready-to-serve cold beverages in bars, restaurants, clubs, pubs, and cafés. Engineered to serve cold drinks at 1°C to 4°C (or adjustable up to 15°C) in ambient environments of up to 40°C. Made from powder-coated, galvanised steel with colour options, it can also be upgraded to full stainless-steel construction. The ‘frameless’ glass doors provide maximum product viewing and are designed for condensation protection in most environments via the double-glazed, argon-filled low-e insulated panels and heated fascia. For high humidity tropical environments heated glass versions are available. The doors and cabinet are fitted with built-in retractable tabs to enable locking via padlock. The built-in LED lights provide optimum merchandising and can be dimmed or timed to turn on and off via a free smartphone app. The fridge uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge and low noise output and can be provided in Remote versions. The side-mounted fully removable refrigeration cartridge (with left and right options) is front-breathing and can be removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to a free app to enable the user to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



**Warranty**




**Natural Refrigerant**



**GEMS**



**SKOPE-connect**

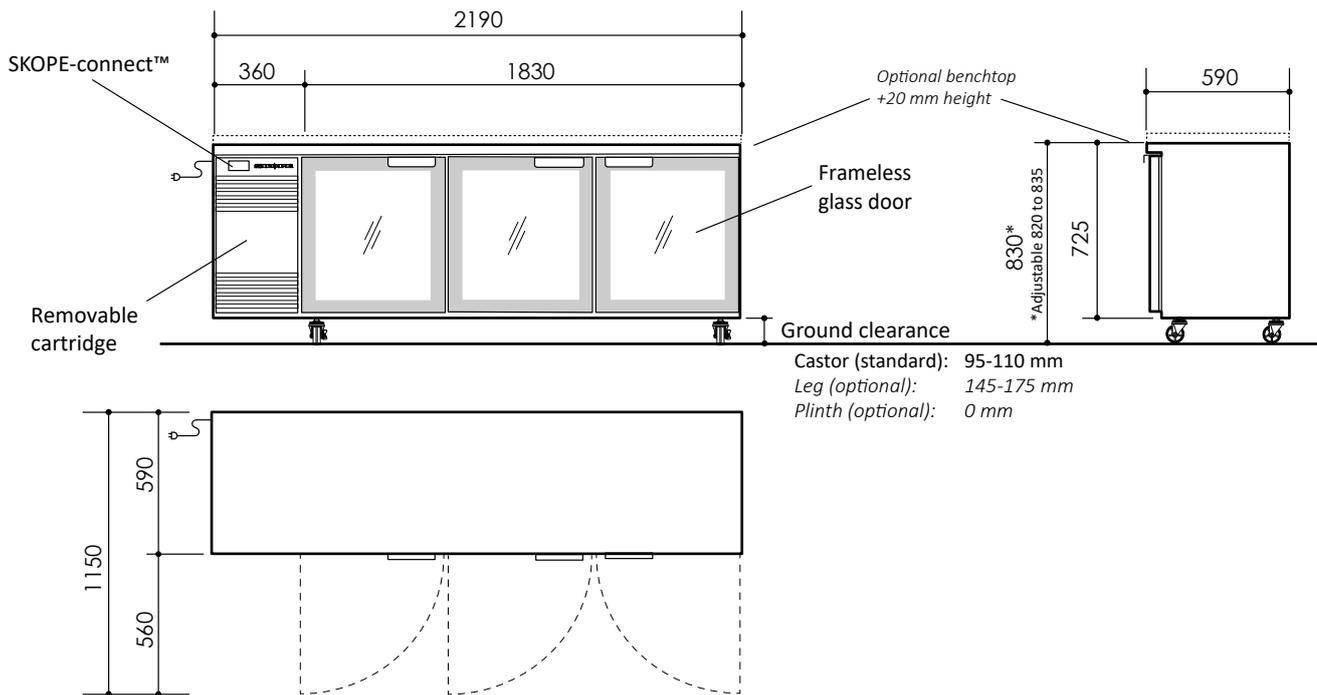

### Cabinet

Type	SlimLine		
Finish	Powdercoat galvanised steel or stainless steel		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo.iso Pentane (C5H10/C5H12)	
Doors	Type	Glass Swing door (double-glazed, low-e, argon-filled)	
	Opening Size	Height (mm)	538
		Width (mm)	511
Shelving	Six adjustable height, plastic-coated wire shelves 4 × outer shelf (547W × 440L), 2 × inner shelf (605W × 440L)		
Lighting*	1 × 24 W, cool white (5500-6500K) LED strip on cabinet ceiling		

### Dimensions†

	External	Internal	Packed
Width (mm)	2190	1730	TBC
Depth (mm)	590	475	TBC
Height (mm)	830 (std. castors)	545	TBC
	725 (plinth mount)		
Weight (kg)	207		TBC
Capacity (L)	448		
Footprint (m <sup>2</sup> )	1.29		

### Ventilation (mm)

Top	Sides	Rear
Not required	Not required	Not required

### Product Loading

	Facing	Loading
330ml can	50	300
600ml bottle	44	264

\* Accessible via the free SKOPE-connect™ app.

† Allow for dimensional tolerances when installing the cabinet(s).

### Performance

Product Temperature Range (°C)	1 to 4 (adjustable* from 0 to 15)	
Rated Ambient Temperature	32°C/65% relative humidity	
Maximum Ambient Temperature (°C)	40	
Sound Level (dB(A))	Standard	Less than 66
	Hush Mode*	Less than 62

### Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	9	
Product Temperature Class	M1 (.1 to 5°C)	
Total Energy Consumption	2.5 kWh/24h	
Annual Running Costs	\$274 (@ \$0.30/kWh)	

### Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply	
Cord	1.9 m power cord with 3-pin, 10 amp plug	
Current draw (A)	2.6	

### Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)		
System Type	Removable cartridge		
Cartridge Weight (kg)	24		
Refrigerant/Charge	R290/81g		
Nominal Capacity (W)	650		
Heat Rejection (W)	Average	105	Peak 130
Remote Duty	n.a.		
Defrost Type	Off-cycle		
Drainage	No plumbing required		



SL.3.GSW  
on the SKOPE website