

## Two Glass Door Top Mount Upright Fridge

**Range:** TME  
**SKOPE ID:** SM10GYA  
**Dimensions:** 1130 mm (W) × 745 mm (D) × 2200 mm (H)  
**Capacity:** 897 L

**Project:** \_\_\_\_\_

**Item #:** \_\_\_\_\_

# INDUSTRY KITCHENS

www.industrykitchens.com.au 1800 611 058



A high-efficiency, top-mounted, heavy duty, 2-door display fridge suitable for front and back-of-house applications including restaurants, cafés, clubs, pubs, bars, quick service restaurants, and more. Made from powder-coated, galvanised steel, the cabinet comes complete with five plastic-coated wire shelves, easily adjustable via SKOPE's unique ezi-clip and numbered shelf supports. The "frameless" glass doors provide maximum product viewing and are designed for condensation protection via the double-glazed, argon-filled, low-e, insulated panels. The high impact built-in LED lights can be timed to turn on and off according to your opening times via the free SKOPE-connect smartphone app. A non-illuminated sign panel is included, with space to display your own branding. With M1 compliance, the fridge is engineered to store food and drinks at a standard 1°C to 4°C (adjustable up to 15°C). This high-performance model is the most energy efficient on the market, and is certified under GEMS to the mandatory climate class 3. It is fully tested to operate in ambient environments of up to 40°C (climate class 5). The fridge uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge, and low noise output. The top-mounted, fully removable, modular refrigeration cartridge can be easily removed in line with best practice for safe servicing of flammable refrigerants. With the same cartridge being used in both top and bottom-mounted fridges from 600 L to 1000 L, you achieve the fastest possible servicing times with minimal business disruption. The fridge includes a smart controller that connects to the free SKOPE-connect app, enabling you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



ActiveCore Technology



Natural Refrigerant




GEMS



SKOPE-connect



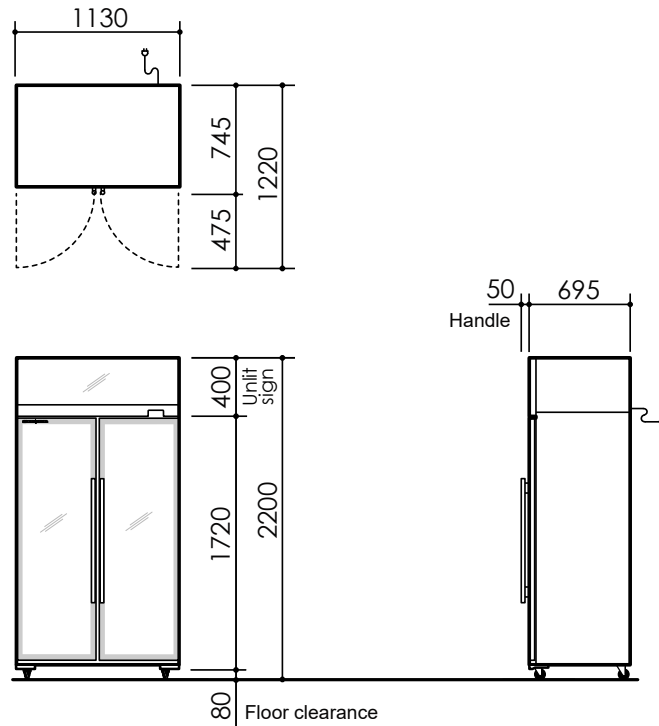

## Cabinet

<b>Type</b>	ActiveCore		
<b>Finish</b>	Powder-coated galvanised steel		
<b>Insulation</b>	Type	PU foam	
	Thickness (mm)	50	
<b>Doors</b>	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
	Type	Glass swing door (double-glazed, single low-e, argon-filled, toughened, safety glass), tab-locking	
<b>Opening Size</b>	Height (mm)	1570	
	Width (mm)	450	
<b>Shelving</b>	Five adjustable height plastic-coated wire shelves (no upstand) 5 x full width shelf (1015W x 465D)		
<b>Lighting</b>	Sign	n.a.	
	Interior*	2 x 1400 mm, 15 W LED	

## Dimensions†

	External	Internal	Packed
<b>Width (mm)</b>	1130	1030	1200
<b>Depth (mm)</b>	745	555	760
<b>Height (mm)</b>	2200 (castors)	1570	2220
<b>Weight (kg)</b>	201		205
<b>Capacity (L)</b>	897		
<b>Footprint (m<sup>2</sup>)</b>	0.84		

## Ventilation (mm)

Top	Sides	Rear
300	Not required	Not required

## Product Loading

	Facing	Loading
330 ml can	75	525
600 ml bottle	70	420

## Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet	Multiple cabinets	
		At each joint	At each end wall
Less than 1 metre	±5 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm

## Performance

<b>Product Temperature Range (°C)</b>	1 to 4 (adjustable* from 1 to 15)
<b>Maximum Ambient Temperature (°C)</b>	40
<b>Sound Power Level (dB(A))</b>	60.2

## Greenhouse and Energy Minimum Standards (GEMS)

<b>Star Rating</b>	9
<b>Product Temperature Class</b>	M1 (-1 to 5°C)
<b>Total Energy Consumption</b>	2.70 kWh/24 h
<b>Annual Running Costs</b>	\$296 (@ \$0.30/kWh)

## Electrical

<b>Supply</b>	220-240 volts a.c., 50 Hz, single phase supply
<b>Cord</b>	2.3 m power cord with 3-pin, 10 amp plug
<b>Current draw (A)</b>	1.7

## Refrigeration

<b>Controller</b>	SCS Connect (SKOPE-connect™ compatible)		
<b>System Type</b>	Removable cartridge		
<b>Cartridge Weight (kg)</b>	26.5		
<b>Refrigerant/Charge</b>	R290/111 g		
<b>Nominal Capacity (W)</b>	547		
<b>Heat Rejection (W)</b>	Average 120	Peak	170
<b>Defrost Type</b>	Automatic, off-cycle		
<b>Drainage</b>	No plumbing required		

\* Accessible via the free SKOPE-connect™ app.



TME1000N-A  
on the SKOPE website