


# specifications

## TMF650N-A Series

ActiveCore Series, 1 Door (Glass), Upright Freezer



Project: \_\_\_\_\_  
Item No: \_\_\_\_\_

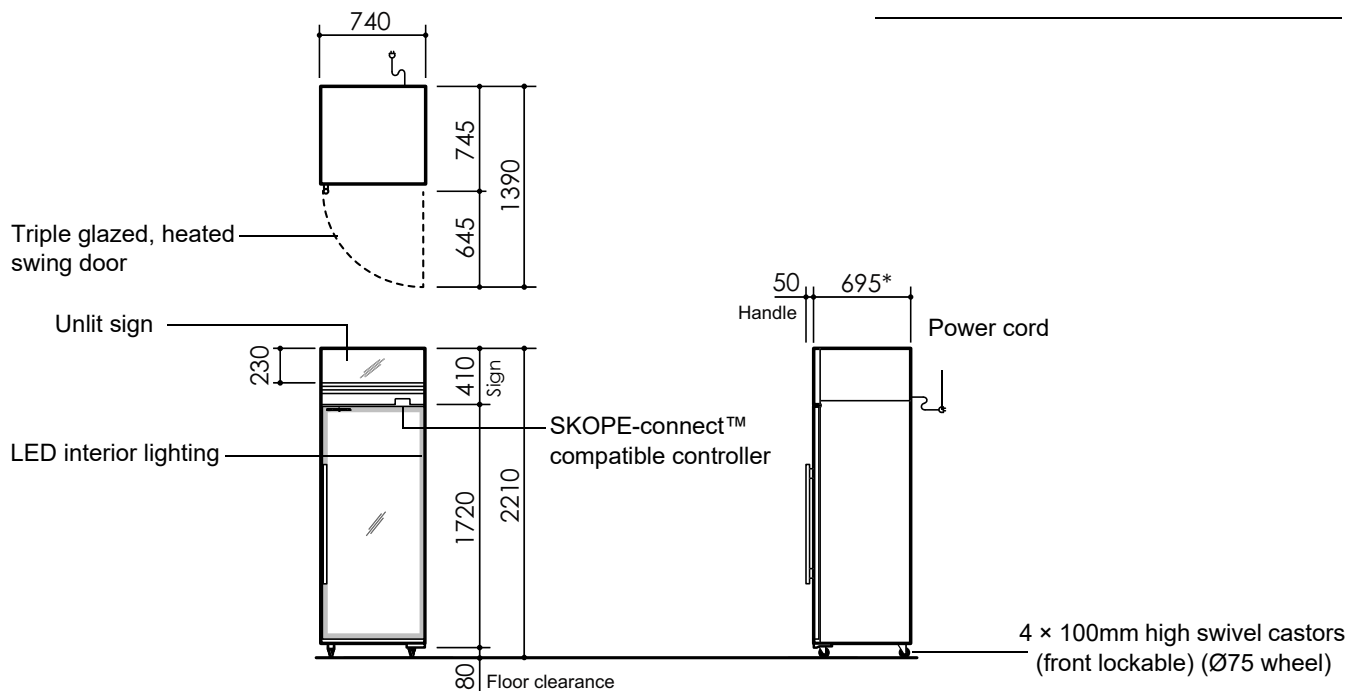

### CABINET

|                       |                                                                                                                                   |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Door                  | 1 × self-closing, triple glazed, single Low-E film, heated, lockable, argon filled, toughened safety glass swing door (hinged RH) |
| Internal door opening | 1 × door openings: 1570mm high × 620mm wide                                                                                       |
| Shelves               | 5 × adjustable height wire shelves: 625mm wide × 470mm deep                                                                       |
| Sign                  | Unlit                                                                                                                             |
| Material              | Powdercoat galvanised steel                                                                                                       |

### PERFORMANCE

|                          |                                                                |
|--------------------------|----------------------------------------------------------------|
| Max. ambient temp.       | 40°C                                                           |
| Temperature range        | -21°C to -18°C (adjustable with SKOPE-connect™ -26°C to -12°C) |
| Noise measurement        | Standard: ≤63.5 dB(A)<br>Hush Mode: ≤61.5 dB(A)                |
| GEMS class               | L1                                                             |
| GEMS energy consumption  | 10.47 kWh/24h                                                  |
| GEMS annual running cost | \$1,146 p.a. (@ \$0.30/kWh)                                    |

### ELECTRICAL

|                                 |                                               |
|---------------------------------|-----------------------------------------------|
| Electrical safety climate class | 5                                             |
| Interior side lighting          | 1 × 1400mm, 15W LED                           |
| Power cord                      | Supplied with 10 Amp plug and 2.3m lead       |
| Power supply                    | 220-240 Volts a.c. 50 Hz, single phase supply |
| Current draw                    | 5.5 Amps (includes unit 3.5 Amps)             |

### REFRIGERATION

|                            |                                                                             |
|----------------------------|-----------------------------------------------------------------------------|
| Controller                 | SCS Connect (SKOPE-connect™ compatible)                                     |
| Connectivity interface     | Bluetooth                                                                   |
| Refrigeration system       | Top mounted, integral, removable ActiveCore freezer cartridge (UTHDNI-0043) |
| Refrigerant                | R290 / 107g (natural refrigerant)                                           |
| Nominal capacity           | 920 Watts (4500rpm)                                                         |
| Heat rejection (Avg./Peak) | 440 Watts/520 Watts                                                         |
| Drainage                   | No plumbing required                                                        |

### DIMENSIONS

|            | External           | Internal |
|------------|--------------------|----------|
| Height     | 2210mm             | 1570mm   |
| Width      | 740mm              | 640mm    |
| Depth      | 745mm              | 554mm    |
| Floor area | 0.55m <sup>2</sup> |          |
| Weight     | 170kg              |          |
| Volume     | 610L               |          |

\* Depth 695mm excludes removable door handle and door lock bracket

| Dimensional tolerances                                                     |                             |                  |
|----------------------------------------------------------------------------|-----------------------------|------------------|
| Before installing this cabinet allow the following dimensional tolerances: |                             |                  |
| Linear dimensions                                                          | Overall cabinet dimensions  |                  |
| Less than 1 metre                                                          | ±5mm                        |                  |
| More than 1 metre                                                          | -5mm to +10mm               |                  |
|                                                                            | Length of multiple cabinets |                  |
|                                                                            | At each joint               | At each end wall |
| Less than 1 metre                                                          | ±5mm                        | +15mm            |
| More than 1 metre                                                          | -5mm to +10mm               | +15mm            |

| Ventilation requirements |              |
|--------------------------|--------------|
| Top                      | 300mm        |
| Sides                    | Not required |
| Back                     | 10mm         |
| Bottom                   | Not required |

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2021 SKOPE Industries Limited

### SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673  
Email: skope@skope.com, Website: www.skope.com

INDUSTRY  
KITCHENS

www.industrykitchens.com.au 1800 611 058

PSS0689 Rev. 1.1 Nov. 2021

