

Two Solid Door Salad Preparation GN1/3 Right Hand Fridge

Range: ProSpec
SKOPE ID: P3SR2A-B1
Dimensions: 1290 mm (W) × 700 mm (D) × 850 mm (H)*
Gross Volume: 225 L

Project: _____

Item #: _____

* Height with legs is adjustable from 850 to 895.



A two solid door Gastronorm salad prep station designed for unbeatable food safety, best suited to restaurants, cafés, and quick service kitchens in all types of hospitality and food service venues. This underbench fridge is made from food-safe 304 AISI stainless steel throughout the interior and exterior with a pre-fixed prep well built in that's designed to sit alongside a bench. The fridge is engineered to safely store food in ambient environments of up to 40°C (climate class 5). Standard storage temperatures range from 1°C to 5°C, or are adjustable via the SKOPE-connect smartphone app for specific food types. The 700 mm deep cabinet with a fully welded and integrated worktop can be configured to suit multiple installation options. At 850 to 895 mm adjustable overall height with legs, it can be positioned under a bench, or on a pre-installed plinth by removing the legs, and has two self-closing solid swing doors with barrel locks. Inside the fridge, there is a door-activated LED light and 4 × 304 stainless steel shelves. This fridge is configurable for left or right hand doors and GN pans. The service compartment features an easily removable and cleanable condenser filter. The fully removable refrigeration cartridge uses R290 natural refrigerant for low energy consumption, and low heat discharge. It is fully front breathing with no side or rear clearance space required and can be easily removed in line with best practice for safe servicing of flammable refrigerants. Left hand services are also available. The fridge includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty

Natural Refrigerant



GEMS




304 Stainless Steel



GN-compatible



SKOPE-connect

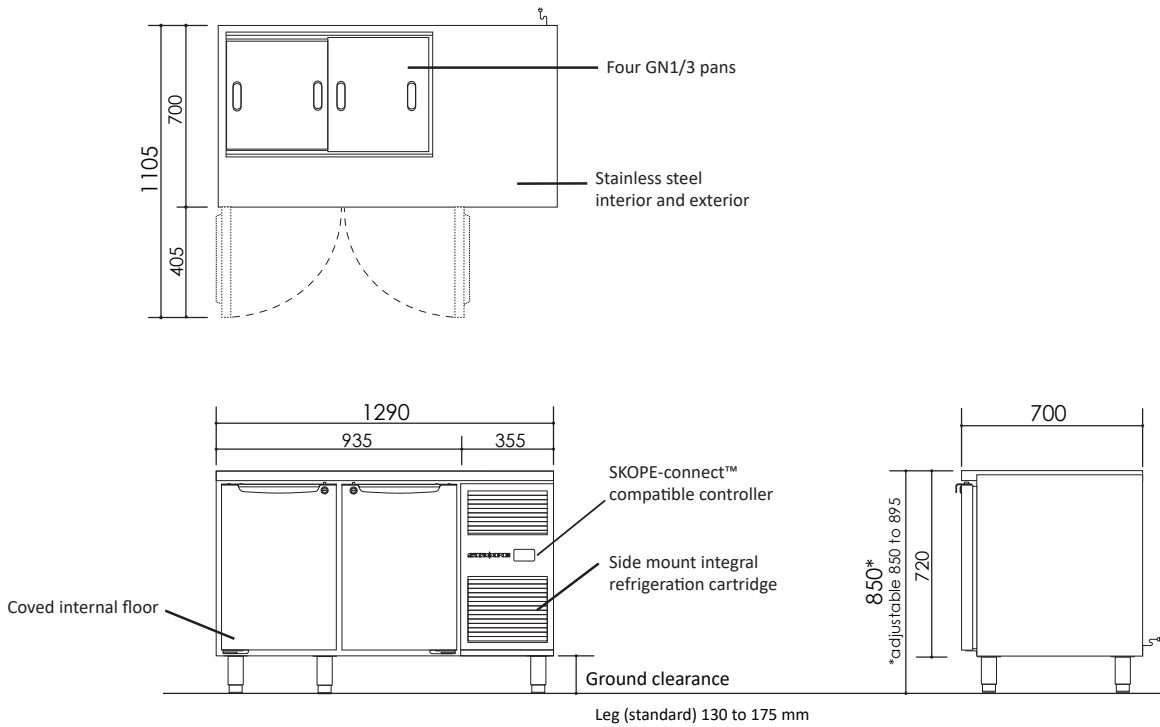

Cabinet

| | | | |
|-------------------|--|---------------------------------|-----|
| Type | Underbench | | |
| Finish | 304 AISI stainless steel | | |
| Insulation | Type | PU foam | |
| | Thickness (mm) | 50 | |
| | Blowing Agent | Cyclo-iso pentane (C5H10/C5H12) | |
| Doors | Type | Solid swing door (barrel lock) | |
| | Opening Size | Height (mm) | 460 |
| | | Width (mm) | 355 |
| Shelving | Four 304 stainless steel wire shelves 4 x shelf (330W x 530D) | | |
| Gastronorm | Size | 1/3 | |
| Lighting* | 1 x 400 mm, 4W LED light (door-activated) | | |

Dimensions†

| | External | Internal | Packed |
|----------------------------------|----------------------------|----------|--------|
| Width (mm) | 1290 | 815 | 1350 |
| Depth (mm) | 700 | 580 | 770 |
| Height (mm) | 850 to 895 (standard legs) | | |
| | 850 (castors) | 475 | 900 |
| | 720 (plinth mount) | | |
| Weight (kg) | 113 | | 125 |
| Gross Volume (L) | 225 | | |
| Footprint (m²) | 0.9 | | |

Ventilation (mm)

| Top | Sides | Rear |
|--------------|--------------|--------------|
| Not required | Not required | Not required |

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

| Linear dimensions | Single cabinet | | Multiple cabinets | |
|-------------------|-----------------|--|-------------------|------------------|
| | | | At each joint | At each end wall |
| Less than 1 metre | ±5 mm | | ±5 mm | +15 mm |
| More than 1 metre | -5 mm to +10 mm | | -5 mm to +10 mm | +15 mm |

Performance

| | |
|---|--------|
| Product Temperature Range (°C) | 1 to 5 |
| Maximum Ambient Temperature (°C) | 40 |
| Sound Level (dB(A)) | 63.2 |

Greenhouse and Energy Minimum Standards (GEMS)

| | |
|----------------------------------|----------------------|
| Star Rating | n.a. |
| Product Temperature Class | -1 to 5°C |
| Total Energy Consumption | 3.50 kWh/24 h |
| Annual Running Costs | \$383 (@ \$0.30/kWh) |

Electrical

| | |
|-------------------------|--|
| Supply | 220-240 volts a.c., 50 Hz, single phase supply |
| Cord | 2 m power cord with 3-pin, 10 amp plug |
| Current Draw (A) | 1.8 |

Refrigeration

| | | | |
|------------------------------|---|-----|-----------------|
| Controller | SCS Connect (SKOPE-connect™ compatible) | | |
| System Type | Removable cartridge | | |
| Cartridge Weight (kg) | 30 | | |
| Refrigerant/Charge | R290/90 g | | |
| Nominal Capacity (W) | 600 (EN12900 MBP) | | |
| Heat Rejection (W) | Average | 150 | Peak 170 |
| Defrost Type | Automatic, off-cycle | | |
| Drainage | No plumbing required | | |



* Accessible via the free SKOPE-connect™ app.

PG13.PPS.2.SD.RH
on the SKOPE website