

## Two Solid Door Salad Preparation GN1/3 Drop-in Collar Fridge

**Range:** ProSpec  
**SKOPE ID:** P3SR2A-A1  
**Dimensions:** 1290 mm (W) × 700 mm (D) × 850 mm (H)\*  
**Gross Volume:** 225 L

**Project:** \_\_\_\_\_

**Item #:** \_\_\_\_\_

\* Height with legs is adjustable from 845 to 885.



A two solid door Gastronorm salad prep station designed for unbeatable food safety, best suited to restaurants, cafés, and quick service kitchens in all types of hospitality and food service venues. This underbench fridge is made from food-safe 304 AISI stainless steel throughout the interior and exterior with a drop-in collar that's suitable for benchtops. The fridge is engineered to safely store food in ambient environments of up to 40°C (climate class 5). With 5M1 performance, standard storage temperatures range from 1°C to 5°C, or are adjustable via the SKOPE-connect smartphone app for specific food types. The 700 mm deep cabinet with a fully welded and integrated worktop can be configured to suit multiple installation options. At 845 to 885 mm adjustable overall height with legs, it can be positioned under a bench on the supplied castors, or on a pre-installed plinth by removing the castors, and has two self-closing solid swing doors with barrel locks. Inside the fridge, there is a door-activated LED light and 4 × 304 stainless steel GN1/3 shelves. This fridge is configurable for left or right hand doors and GN pans. The service compartment features an easily removable and cleanable condenser filter. The fully removable refrigeration cartridge uses R290 natural refrigerant for low energy consumption, and low heat discharge. It is fully front breathing with no side or rear clearance space required and can be easily removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty

Natural Refrigerant



GEMS




304 Stainless Steel



GN-compatible



SKOPE-connect

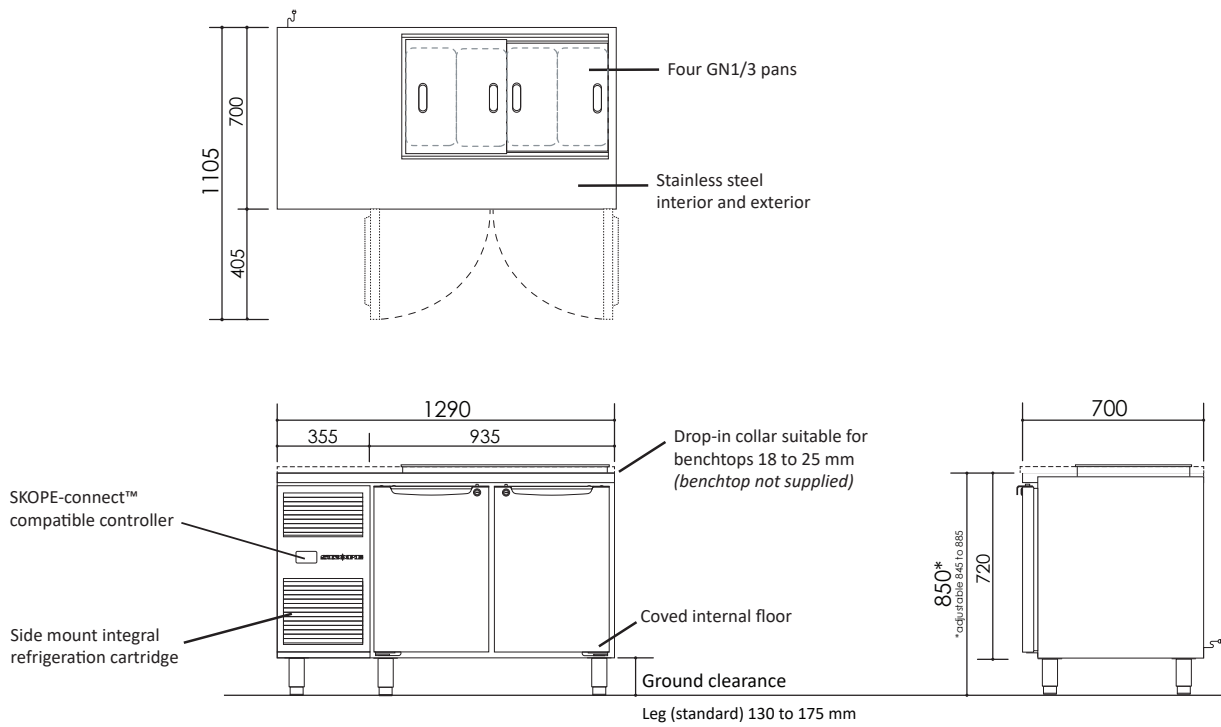

### Cabinet

<b>Type</b>	Underbench		
<b>Finish</b>	304 AISI stainless steel		
<b>Insulation</b>	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
<b>Doors</b>	Type	Solid swing door (barrel lock)	
	Opening Size	Height (mm)	460
		Width (mm)	355
<b>Shelving</b>	Four 304 stainless steel wire shelves 4 x shelf (330W x 530D)		
<b>Gastronorm</b>	Size	1/3	
<b>Lighting*</b>	1 x 400 mm, 4W LED light (door-activated)		

### Dimensions†

	External	Internal	Packed
<b>Width (mm)</b>	1290	815	1350
<b>Depth (mm)</b>	700	580	770
<b>Height (mm)</b>	845 to 885 (standard legs)		
	850 (castors) 720 (plinth mount)	475	900
<b>Weight (kg)</b>	113		TBC
<b>Gross Volume (L)</b>	225		
<b>Footprint (m<sup>2</sup>)</b>	0.9		

### Ventilation (mm)

Top	Sides	Rear
Not required	Not required	Not required

### Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet		Multiple cabinets	
			At each joint	At each end wall
Less than 1 metre	±5 mm		±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm		-5 mm to +10 mm	+15 mm

### Performance

<b>Product Temperature Range (°C)</b>	1 to 5
<b>Maximum Ambient Temperature (°C)</b>	40
<b>Sound Level (dB(A))</b>	63.2

### Greenhouse and Energy Minimum Standards (GEMS)

<b>Star Rating</b>	n.a.
<b>Product Temperature Class</b>	5M1 (-1 to 5°C)
<b>Total Energy Consumption</b>	3.50 kWh/24 h
<b>Annual Running Costs</b>	\$383 (@ \$0.30/kWh)

### Electrical

<b>Supply</b>	220-240 volts a.c., 50 Hz, single phase supply
<b>Cord</b>	2 m power cord with 3-pin, 10 amp plug
<b>Current Draw (A)</b>	1.8

### Refrigeration

<b>Controller</b>	SCS Connect (SKOPE-connect™ compatible)		
<b>System Type</b>	Removable cartridge		
<b>Cartridge Weight (kg)</b>	30		
<b>Refrigerant/Charge</b>	R290/90 g		
<b>Nominal Capacity (W)</b>	600 (EN12900 MBP)		
<b>Heat Rejection (W)</b>	<b>Average</b>	150	<b>Peak</b> 170
<b>Defrost Type</b>	Automatic, off-cycle		
<b>Drainage</b>	No plumbing required		



\* Accessible via the free SKOPE-connect™ app.

PG13.PPS.DC.2.SD  
on the SKOPE website