


specifications

RF7.UPR.1.SD

ReFlex Series, 1 Door (Solid), Upright Fridge

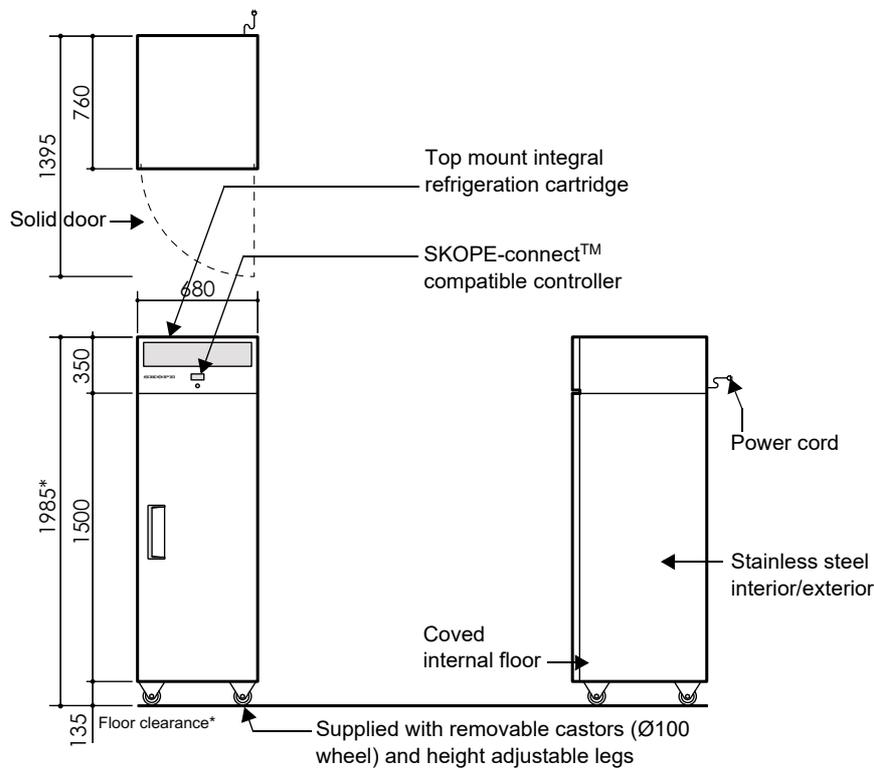

CABINET

Model ID	RF7.UPR.1.SD
SKOPE ID	RF7UPR1-SCTP-SD
Doors	1 × self-closing, reversible, lockable, solid swing door. RH
Internal door opening	1 × door openings: 1375mm high × 555mm wide
Shelves	5 × adjustable height shelves: 535mm wide × 530mm deep
Worktop	n.a.
Material	304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp.	40°C
Temperature range	-1°C to 5°C

ELECTRICAL

Climate class	5 (40°C/40% RH)
Interior lighting	1 × 1200mm, 12W LED light (door activated)
Power cord	Supplied with 2.3m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	2.0 Amps (includes unit 1.5 Amps)

REFRIGERATION

Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth
Refrigeration system	Top mounted, integral, removable refrigeration cartridge (part number UTKCNI-0017)
Refrigerant	R290 / 70g (natural refrigerant)
Nominal capacity	450 Watts
Drainage	No plumbing required

DIMENSIONS

	External	Internal
Height	1985mm*	1395mm
Width	680mm	560mm
Depth	760mm	640mm
Floor area	0.52m ²	
Weight	115kg	
Internal volume	500 litres	

* With supplied castors fitted. See height variation below

Height variation

Supplied castors	1985mm
Supplied height adjustable legs	1995-2035mm
No castors or legs	1850mm

Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements

Top	300mm
Sides	Not required
Back	Not required
Bottom	Not required