




**Product Information:**

- Class leading, European style, professional quality and reliability since 1963
- 700 series, gas frytop with 15mm smooth satin chrome plate (25 MJ/h)  
(also available in 15mm ribbed satin chrome plate)
- Satin chrome plate delivers a cost effective, highly durable, faster heating and easier cleaning solution than alternative plates
- Piezo ignition burners with flame failure device and pilot burner complete with Hi-limit temperature protection
- Temperature regulation via thermostat (90°C – 280°C)
- Robust 304 grade stainless steel construction with rounded corners for improved cleaning
- Hermetically sealed, pressed work surface with raised edges to protect from overflow
- Removable grease tray
- 24-month warranty

**General Drawing:**

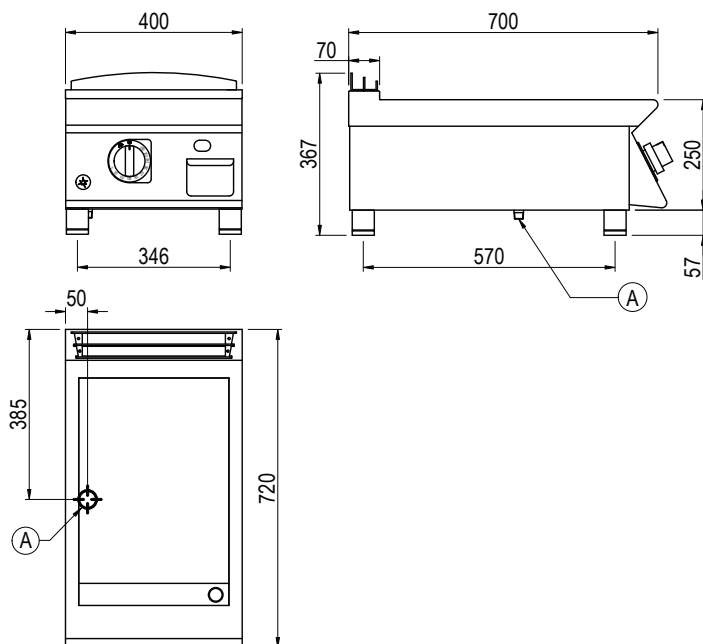

**Specifications:**

|                                         |                 |                      |
|-----------------------------------------|-----------------|----------------------|
| <b>Model - Smooth</b>                   | FLG72TCRXT      |                      |
| <b>Model - Ribbed</b>                   | FRG72TCRXT      |                      |
| <b>W x D x H (mm)</b>                   | 400 x 720 x 367 |                      |
| <b>Weight</b>                           | 50kg            |                      |
| <b>Cooktop (mm)</b>                     | 340 x 460       |                      |
| <b>Packed Dimensions (mm)</b>           | 450 x 825 x 570 |                      |
| <b>Packed Weight (mm)</b>               | 55kg            |                      |
|                                         | <b>Natural</b>  | <b>Universal LPG</b> |
| <b>Gas Connection</b>                   | 1/2" BSP        | 1/2" BSP             |
| <b>Minimum Normal Test Gas Pressure</b> | 1.3 kPa         | 2.75 kPa             |
| <b>Maximum Normal Test Gas Pressure</b> | 3.5 kPa         | 3.5 kPa              |
| <b>Nominal Test Point Pressure</b>      | 1.0 kPa         | 2.65 kPa             |
| <b>Total Nominal Gas Consumption</b>    | 25 MJ/h         | 25 MJ/h              |

**Note:** It is the responsibility of the installing gas plumber to ensure correct supply and connection sustaining appropriate pressure, when all installed gas appliances are operating at maximum.

**Legend:**

**A** Gas Connection